

02~04P Single Hole
Scale 1:0.7

Specifications:






规格:
Voltage rating:150V AC/DC
额定电压: 150V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ
After environmental testing:≤40mΩ
环境测试后: ≤40兆欧

X1503 W R S-XX XX-9T SN

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- 1.Series No.
- 2.Category:W-wafer
- 3.Welding Board Angle:R-Right Angle 90°
- 4.Welding Way:S-SMT
- 5.Row No-Pin No: XX-02P~12P
- 6.Plug the pin&special No
- 7.Material:9T PA94 94V-0
- 8.Planting style:SN-Bright tin plating

Poles	Dimensions(mm)	
	A	B
02	1.50	6.75
03	3.00	8.25
04	4.50	9.75
05	6.00	11.25
06	7.50	12.75
07	9.00	14.25
08	10.50	15.75
09	12.00	17.25
10	13.50	18.75
11	15.00	20.25
12	16.50	21.75

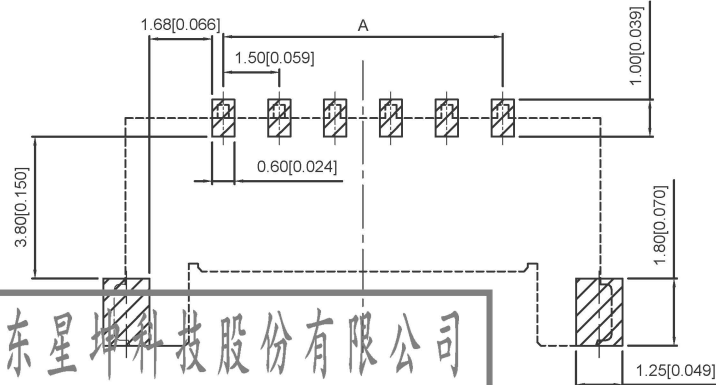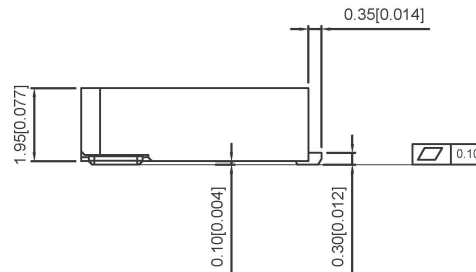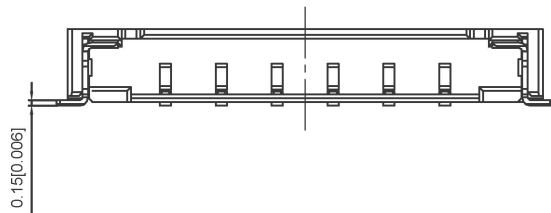

X1503WRS-XX-GTSN	Nylon 9T UL 94V-0	Brass	Tin-Plated	X1503H	1000PCS
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal	Qty/Reel

广东星坤科技股份有限公司

生效	日期
文件	工程
章	

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 1.50mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X1503WRS-XX-9TSN
APPD		DATE		SIZE: A4	WEIGHT 1.0g
KKB INDUSTRIAL PRECISION CO., LIMITED					SHEET 1/1
					REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)