





■ Specifications :

- Voltage rating: 350V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -55°C~+105°C
- Insulation resistance:  $\geq 1000M\Omega$
- Contact resistance:  $\leq 20m\Omega$
- After environmental testing:  $\leq 40m\Omega$

X1511 T-P SN

- ① ② ③ ④
- ① Series Number
  - ② Category : T-terminal
  - ③ Material: P-Phosphor bronze
  - ④ Plating style: SN-Bright tin plating

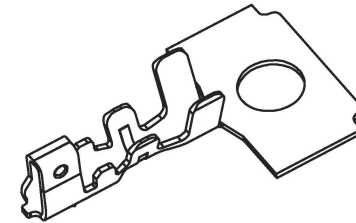

X1511T-PSN	Phosphor Bronze	AWG#24-30	1.10mm(Max)	Stamping Before Plating :30u" Ni,70u" Sn	X1511H
PARY NO	Matrial	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司

生效

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

REVISIONS

NO.	DESCRIPTION	DATE	REVISED	APPROVED
-----	-------------	------	---------	----------

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X1511T-PSN
DWN	DATE	VIEW:	PART NO.: 1.5mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)