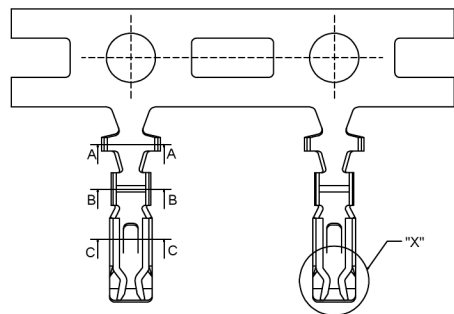


Specificationsxxkb

规格:

Voltage rating:350V AC/DC

额定电压: 350V AC/DC

Current rating:4A AC/DC

额定电流: 4A AC/DC

Withstanding voltage:1700V AC/minute

耐受电压: 1700V AC/分钟

Temperature range:-25°C~+85°C

温度范围: -25°C~+85°C

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ XKB

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

X1800 T -PSN

① ② ③ ④

① Series Number

② Category: T-terminal

③ Material: P-Phosphor bronze

④ Plating Style: SN-Bright tin plating

X1800T-PSN	Phosphor Bronze	AWG#28-30	1.8mm(Max)	Stamping Before plating 30u"MIN Ni;70u"Sn	X1800H
XPART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司			
生		日	
期			
文件工程章			

XKB	ANGULAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE: X1800T-PSN
	L ≤ 4	±0.2	DWN	DATE	VIEW: ①	PART NO.: 2.54 mm Crimp Style Connectors
	4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	DWG NO.:
	16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	
	L > 63	±0.5				
UNSPECIFIED TOLERANCES						
WEIGHT	SHEET	REVISION				
1.0g	1/1	A0				

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)