


PCB LAYOUT

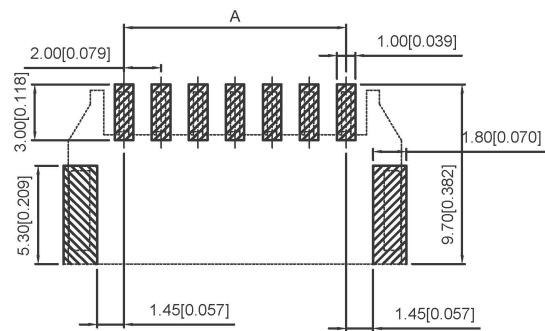







Specifications:

规格:  
 Voltage rating:125V AC/DC  
 额定电压: 125V AC/DC  
 Current rating:3A AC/DC  
 额定电流: 3A AC/DC  
 Withstanding voltage:500V AC/minute  
 耐受电压: 500V AC/分钟  
 Temperature range:-45°C~+105°C  
 温度范围: -45°C~+105°C  
 Insulation resistance:≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:≤10mΩ  
 接触电阻: ≤10mΩ  
 After environmental testing:≤20mΩ  
 环境测试后: ≤20兆欧



X2009 W RS-XX-9TSW

① ② ③ ④ ⑤ ⑥ ⑦

- 1.Series No.
- 2.Category:W-WAFER
- 3.Welding Board Angle:R-Right Angle 90°
- 4.Welding Way: S-SMT
- 5.Row No-Pin No: XX-02P~15P
- 6.Material: 9T-PA9T 94V-0
- 7.Plating Category: SW-Fog Tin plating

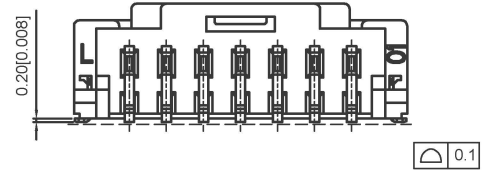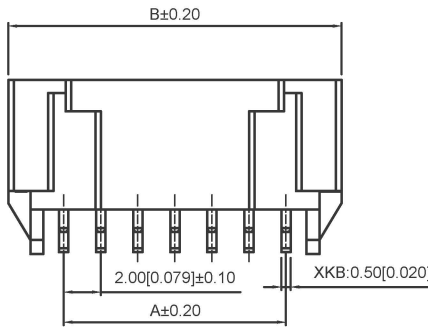

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	c		A	B	C
2	2.00	8.00	4.80	9	16.00	22.00	18.80
3	4.00	10.00	6.80	10	18.00	24.00	20.80
4	6.00	12.00	8.80	11	20.00	26.00	22.80
5	8.00	14	10.80	12	22.00	28.00	24.80
6	10.00	16	12.80	13	24.00	30.00	26.80
7	12.00	18	14.80	14	26.00	32.00	28.80
8	14.00	20	16.80	15	28.00	34.00	30.80

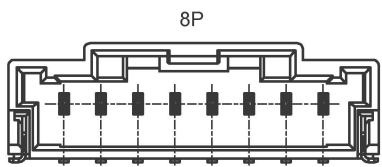

X2009WRS-XX-9TSW	PA9T UL 94V-0	Brass	Tin-Plated	Brass	Tin-Plated	X2009H
PART NO	Material	Material(Pin)	Finish(Pin)	Material(Solder Tabs)	Finish(Solder Tabs)	Suitable XKB Terminal

广东星坤科技股份有限公司

生	日期
效	
效	
效	
MARK	文件工程章
DESCRIPTION	REVISIONS
DATE	REVISED
APPROVED	UNSPECIFIED TOLERANCES
units: mm	
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm
www.xk-dg.cn	www.helloxkb.com
www.helloxkb.com	

DSND	DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
DWN	DATE	VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.: X2009WRS-XX-9TSW
APPD	DATE	SIZE: A4	WEIGHT 1.0g
KKB INDUSTRIAL PRECISION CO., LIMITED			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)