





Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 1000V AC/minute
 耐受电压: 1000V AC/分钟

Temperature range: -25°C ~ +85°C
 温度范围: -25°C ~ +85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤30mΩ
 接触电阻: ≤30mΩ
 After environmental testing: ≤40mΩ
 环境测试后: ≤40兆欧

X2011 T X - P SN X - A

① ② ③ ④ ⑤ ⑥ ⑦

1. Series Number
2. Category: T-terminal
3. Shape: Blank-ordinary
4. Material: P-Phosphor bronze
5. Plating style: SN-Bright tin plating
6. Plating method: Blank-Stamping before plating
7. Mold No/Mark/Special No: A-Mating 2011-A HSG

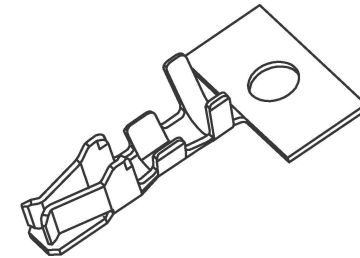

X2011T-PSN-A	Phosphor Bronze	AWG#22-30	1.45mm(MAX)	Stamping Before Plating: 30u"MIN. Ni; 70u"MIN. Sn	X2011H-A
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司

SECTION: A-A
SCALE: 1:1

SECTION: B-B
SCALE: 1:1

SECTION: C-C
SCALE: 1:1

生	日期
效	
效	
效	
MARK	文件工程章

DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X2011T-PSN-A
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)