

**Specifications:**

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-25°C-+85°C

温度范围: -25°C-+85°C

Insulation resistance:≥1000MΩ


绝缘电阻: ≥1000MΩ

Contact resistance:≤10mΩ

接触电阻: ≤10mΩ

After environmental testing:≤20mΩ



环境测试后: ≤20兆欧

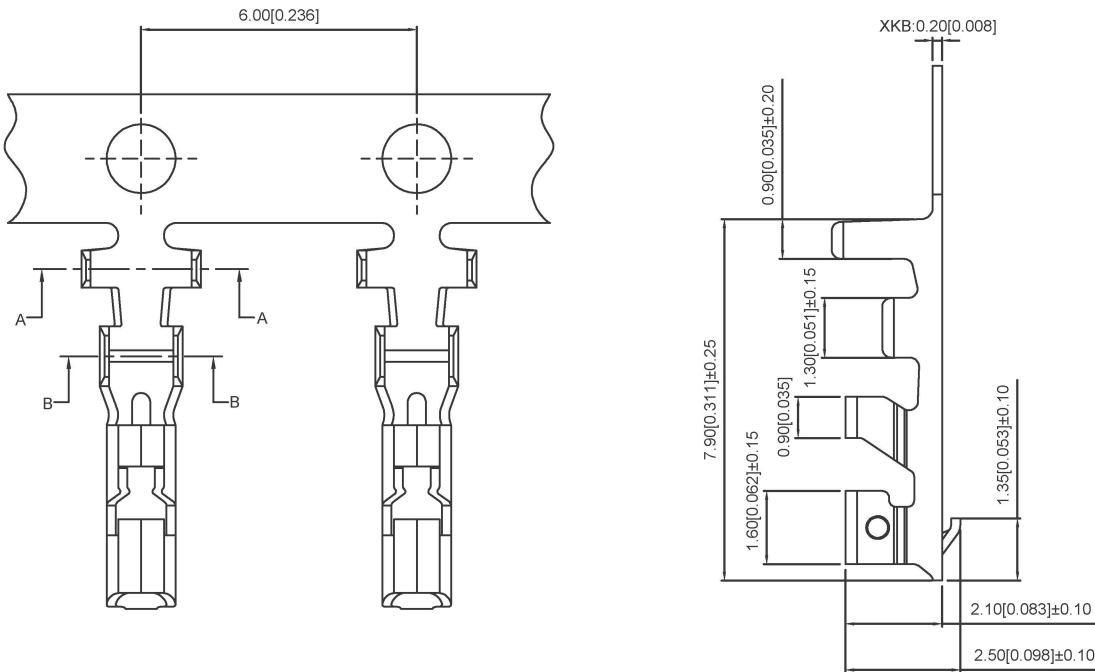

**X2015 T- P SN**

① ② ③ ④

1. Series Number
2. Category: T-terminal
3. Material: P-Phosphor bronze
4. Plating style: SN-Bright tin plating

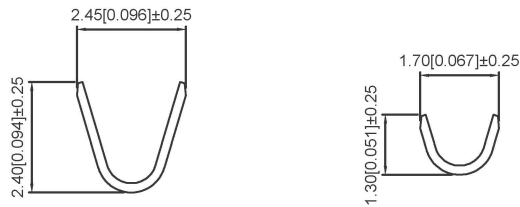

X2015T-PSN	Phosphor Bronze	AWG#22-28	1.5mm(MAX)	Stamping Before Plating;30u MIN Ni ;70u MIN Sn	X2015H
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB

广东星坤科技股份有限公司

生	日期
ΔX	ΔX
ΔX	ΔX
MARK	文件工程章
DESCRIPTION	REVISIONS
DATE	REVISED
APPROVED	UNSPECIFIED TOLERANCES
units: mm	tolerance:
X.X ±0.2mm	X.XX ±0.1mm
X.XXX ±0.05mm	

DSND	DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	2.00mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.: X2015T-PSN
KKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT SHEET REVISION
			1.0g 1/1 A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)