


Section: B-B

Specifications:
 规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range: -25°C ~ +85°C
 温度范围: -25°C ~ +85°C
 Insulation resistance: ≥ 1000MΩ
 绝缘电阻: ≥ 1000MΩ
 Contact resistance: ≤ 10mΩ
 接触电阻: ≤ 10mΩ
 After environmental testing: ≤ 20mΩ
 环境测试后: ≤ 20兆欧

X2026 T - PS N-A

① ② ③ ④

1. Series Number
2. Category: T-terminal
3. Material: P-Phosphor bronze
4. Plating style: SN-Bright tin plating

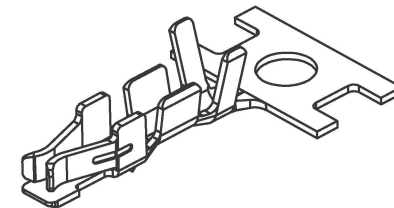

X2026T-PSN-A	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Plating: 30u"MIN. Ni; 70u" MIN. SN	X2026H
PART NO	Material	Wire Range	Insulation OD	Finish	Used In Cjst Housing

广东星坤科技股份有限公司

生	日期
效	
效	
效	
MARK	文件工程章

DESCRIPTION	DATE	REVISED	APPROVED	units: mm
REVISIONS				tolerance:
				X.X ±0.2mm
				X.XX ±0.1mm
				X.XXX ±0.05mm
				UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
DWN	DATE	VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.: X2026T-PSN-A
APPD	DATE	SIZE: A4	WEIGHT SHEET REVISION 1.0g 1/1 A0
KKB INDUSTRIAL PRECISION CO., LIMITED			

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)