


Specifications:

规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range: -25°C~+85°C
 温度范围: -25°C~+85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing: ≤20mΩ
 环境测试后: ≤20兆欧

X2026 T X - P XXX X - L

① ② ③ ④ ⑤ ⑥ ⑦

1. Series Number
2. Category: T-terminal
3. Shape: Blank-ordinary
4. Material: P-Phosphor bronze
5. Plating style: SN-Bright tin plating; V01-Gold Flash
G03-Gold 3u"Plated Contact
6. Plating method: Blank-Stamping before plating
B-plating before stamping
7. Mold NO./Mark/Special NO.: L-Loose

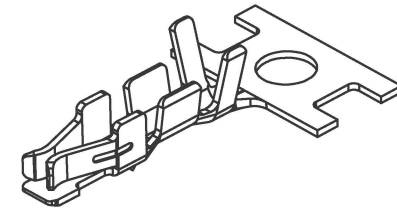

X2026T-PG03-L	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Plating: 30u"MIN Ni; Contact Area Gold: 3u"MIN	X2026H.2026H-A
X2026T-PV01-L				Stamping Before Plating: 30u"MIN. Ni; W hole Gold Flash	
X2026T-PSNB-L				Plating Before Stamping: 10u"Ni; 40~ 60 u"Sn	
X2026T-PSN-L				Stamping Before Plating: 30u"MIN Ni; 70u"MIN Sn	
PART NO	Material	Wire Range	Insulation OD		Suitable XKB Terminal

广东星坤科技股份有限公司

SECTION: A-A
SCALE: 1:1

SECTION: B-B
SCALE: 1:1

SECTION: C-C
SCALE: 1:1

生	日期
效	日期
文件	工程
章	章

UNSPECIFIED TOLERANCES	units: mm
	tolerance:
	X.X ±0.2mm
	X.XX ±0.1mm
	X.XXX ±0.05mm

DSND	DATE	SCALE: N/A	MODEL TYPE: Wire to board connector
DWN	DATE	VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.: X2026T-PXXXX-L
APPD	DATE	SIZE: A4	WEIGHT 1.0g
KKB INDUSTRIAL PRECISION CO., LIMITED			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)