

X2508 H X XX X- N0 XX



① ②③ ④⑤ ⑥ ⑦

- ① Series No.
- ② Category:
- ③ Appearance type:
- ④ Row No.-Pin No.:
- ⑤ Plug the Pin & Special No.:
- ⑥ Material :
- ⑦ Color:

H-HSG
 Blank-ordinary
 XX-Single Row
 Blank-Ordinary
 N0-PA66 94V-0
 Blank : Natural Color ; RE- Red

Specifications:

规格:
Voltage rating:250V AC/DC
 额定电压: 250V AC/DC
Current rating:3A AC / DC
 额定电流: 3A AC / DC
Withstanding voltage: 1500V AC/minute
 耐压电压: 1500V AC/minute
Temperature range:-25℃~+85℃
 温度范围: -25℃~+85℃
Insulation resistance:≥500MΩ
 绝缘电阻: ≥500MΩ
Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
 环境测试后: ≤20mΩ

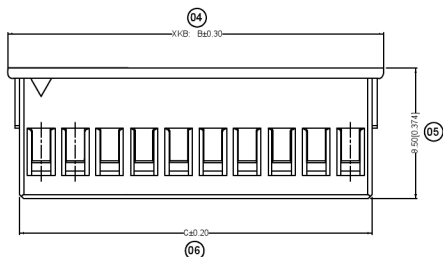

Poles	Dimensions(mm)		
	A	B	C
2	2.50	7.30	5.65
3	5.00	9.80	8.15
4	7.50	12.30	10.65
5	10.00	14.80	13.15
6	12.50	17.30	15.65
7	15.00	19.80	18.15
8	17.50	22.30	20.65
9	20.00	24.80	23.15
10	22.50	27.30	25.65
11	25.00	29.80	28.15
12	27.50	32.30	30.65
13	30.00	34.80	33.15
14	32.50	37.30	35.65
15	35.00	39.80	38.15

X2508H-XX-N0	Nylon 66 UL 94V-0	X2508T	X2508W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS
 DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: NA	MODEL TYPE:
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	2.50 mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
VXP INDUSTRIAL PRECISION CO., LIMITED			X2508H-XX-N0
WEIGHT		SHEET	REVISION
1.0g		1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)