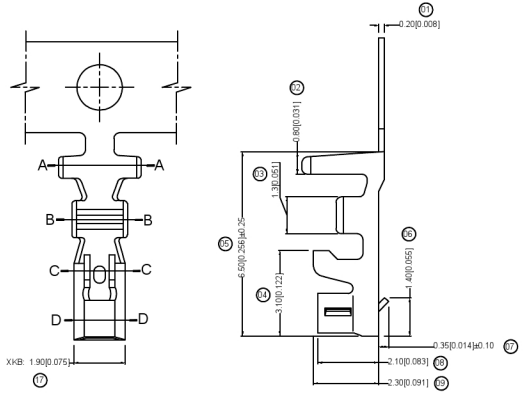

SECTION: A-A
SCALE: 1:1

SECTION: B-B
SCALE: 1:1

SECTION: C-C
SCALE: 1:1

SECTION: D-D
SCALE: 1:1

X2508 T X - P SN X - X
① ②③ ④ ⑤ ⑥ ⑦

①Series No.
②Category：T-Terminal
③Appearance type：Blank-Ordinary
④Material: P-Phosphor bronze
B-Brass
⑤Plating Style: G**-Gold Plated Contact
V**- All Gold-Plated
01-Gold Flash 02-2u" 03-3u"
05-5u" 10-10u" 15-15u"
SN-Bright Tin Plating
SN1-Bright Tin Plating
0-No Plating Material
SW- Fog Tin Plating
⑥Plating Method : Blank-Stamping before Plating
B-Plating before stamping
⑦ Mold No./Mark/Special No

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating: 3A AC / DC
额定电流: 3A AC / DC
Withstanding voltage: 1500V AC/minute
耐压电压：1500V AC/minute
Temperature range:-25℃～+85℃
温度范围：-25℃～+85℃
Insulation resistance≥500MΩ
绝缘电阻：≥500MΩ
Contact resistance：≤10mΩ
接触电阻:≤10mΩ
After environmental testing:≤20mΩ
环境测试后：≤20mΩ
Mark"*"Indicate Dimensions Need To
Controlled In Emphasis
标记"*"表示需要重点控制的尺寸

X2508T-PSN	Phosphor Bronze	AWG#20-28	1.90mm(Max)	Stamping Before Plating:30~50u" Ni;70~120u"Sn	X2508H
PART N0	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

广东星坤科技股份有限公司

生效		日期
文件工程章		

MARK	DESCRIPTION	DATE	REVISED	APPROVED

REVISIONS

www.xkb.cg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°		
L≤ 4	±0.2		
4<L≤ 16	±0.3		
16<L≤ 63	±0.4		
L> 63	±0.5		
UNSPECIFIED TOLERANCES			

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE:

PART NO.:
2.50 mm Crimp Style Connectors

DWG NO.:
X2508T-PSN

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>XKB Connectivity(中国星坤)

Downloaded From Oneyac.com