




Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ



2*03P-2*12P




2*01P




2*02P

X3025 H M-2*XX XX-N2 XX



- ① Series No.
- ② Category : H-HSG
- ③ Welding Board Angle : M-Male H SG
- ④ Row No.-Pin No. : 2*XX-2*01P-2*12P
- ⑤ Plug the Pin & special No. ;
- ⑥ Material : N2-P A66 94V-2;
- ⑦ Color : Blank-Natural Color

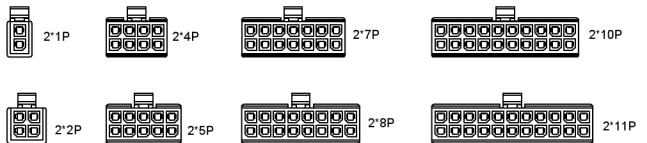

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01			2*07	18.00	21.85
2*02	3.00		2*08	21.00	24.85
2*03	6.00	9.85	2*09	24.00	27.85
2*04	9.00	12.85	2*10	27.00	30.85
2*05	12.00	15.85	2*11	30.00	33.85
2*06	15.00	18.85	2*12	33.00	36.85

X3025HM-2*XX-N2	Nylon 66 94V-2	X3025TF	X3025W
PART NO	Material	Suitable SVW Terminal	Mates With XK B Wafer



生 日期

文件工程章

REVISIONS

www.heloxkb.com

XKB	ANGLAR	±5°
	L ≤ 4	±0.2
	4 < L ≤ 16	±0.3
	16 < L ≤ 63	±0.4
	L > 63	±0.5
UNSPECIFIED TOLERANCES		

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	X3025HM-2*XX-N2
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	3.00 mm Crimp Style Connectors
			DWG NO.:
INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)