



### Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing : ≤20mΩ
- Mark"\*\*\*"Indicate Dimensions Need To Controlled In Emphasis

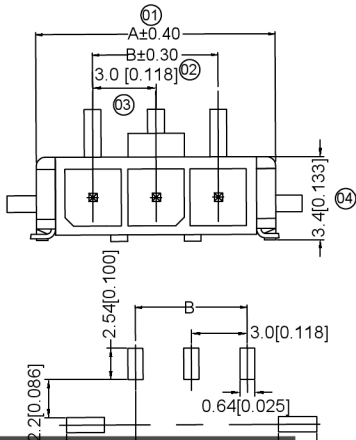

X3025 WVS-XX D-LP XX XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

- ① Series No.
- ② Category :
- ③ W-wafer
- ④ Welding Board Angle: V-180°
- ⑤ Welding Way: S-SMT
- ⑥ Row No.-Pin No. XX-Single row
- ⑦ Special NO.
- ⑧ D-Solder Tabs
- ⑨ Material: LP-LCP 94V-0
- ⑩ Plating Category: V\*\*\*All Gold-Plated G\*\*Gold-Plated Contact '01-Gold Flash ; '02-2U'; '03-3U'; '05-5U' '10-10U' ;'15-15U'; '30-30U'; '50-50U' SN-Bright tin plating 70U" SN1-Bright tin plating 120U"Min. ; SW-Fog Tin plating
- ⑪ Color: Blank-natural color

Poles	Dimension 5(mm)		
	A	B	C
02	9.70	3.00	12.50
03	12.70	6.00	15.50
04	15.70	9.00	18.50
05	18.70	12.00	21.50
06	21.70	15.00	24.50
07	24.70	18.00	27.50
08	27.70	21.00	30.50
09	30.70	24.00	33.50
10	33.70	27.00	36.50
11	36.70	30.00	39.50
12	39.70	33.00	42.50

X3025 WVS-XXD-LPSW	LCP UL 94V-0	Brass	Tin Plated Fog	Brass	Tin Plated Fog	X3025H	
X3025 WVS-XXD-LPSN	LCP UL 94V-0		Tin-Plated		Tin-Plated		
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)		Mates With XKB 5.70Housing

广东星坤科技股份有限公司  
P.C.B. LA YOUT  
日期  
文件工程章

DSND	DATE	SCALE: NA	MODEL TYPE: X3025WVS-XXD-LPXX
DWNN	DATE	VIEW: <input checked="" type="checkbox"/> A	PART NO.:
CHKD	DATE	UNIT: mm/in	3.00mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
UNSPECIFIED TOLERANCES			WEIGHT
XKB ANGLAR ±5°			SHEET
L ≤ 4 ±0.2			REVISION
4 < L ≤ 16 ±0.3			1.0g
16 < L ≤ 63 ±0.4			1/1
L > 63 ±0.5			A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)