



Specifications:
 Voltage rating:500V AC/DC
 Current rating:2A AC/DC
 Withstanding voltage:1500V AC/minute
 Temperature range: -40℃~85℃
 Insulation resistance:≥1000MΩ
 Contact resistance:≤40mΩ
 After environmental testing:≤80mΩ

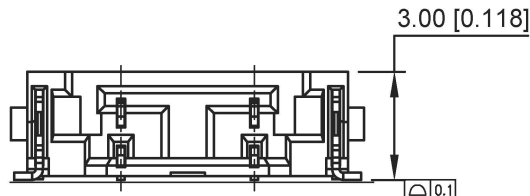

PCB LAYOUT

X3700W F-02HF-LPSN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-WAFER
- ③ Welding Board Angle:F-Female
- ④ Row No.-Pin No.:XX-Single Row
- ⑤ Plug the Pin&Special No.:HF-Halogen Free
- ⑥ Material:LP-LCP 94V-0
- ⑦ Plating Category:SN-Bright Tin Plating

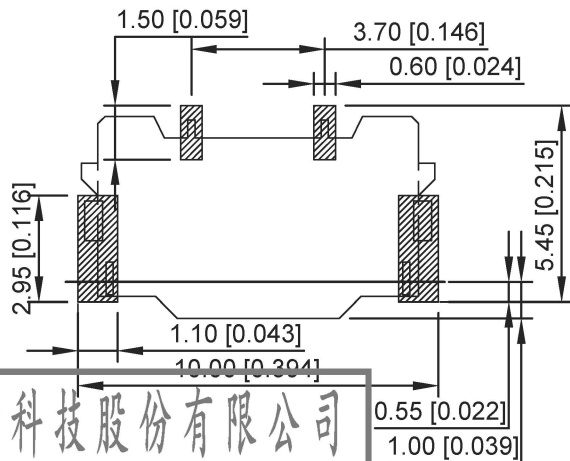

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Tin-Plated	Phosphor Bronze	Tin-Plated	X3700WM
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)	Mates With Housing

广东星坤科技股份有限公司

生 日期
 文件工程章

REVISIONS	DATE	REVISED	APPROVED
UNSPECIFIED TOLERANCES			

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

DSND	DATE	SCALE: N/A
DWN	DATE	VIEW:
CHKD	DATE	UNIT: mm/in
APPD	DATE	SIZE: A4

MODEL TYPE:
X3700WF-02HF-LPSN
 PART NO.:
3.70mm BTB Style Connectors
 DWG NO.:

KKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)