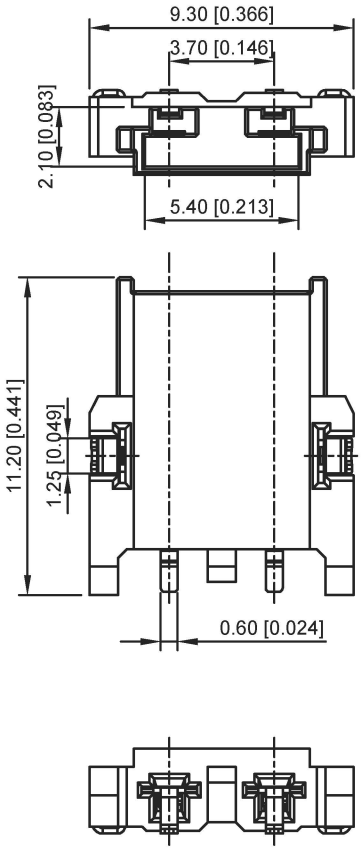

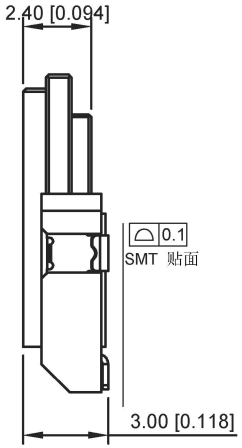

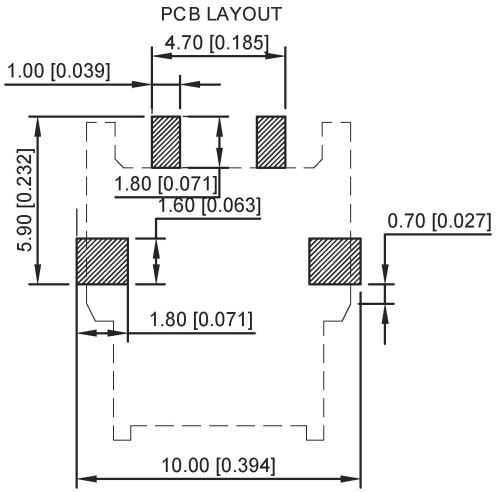



Specifications:
Voltage rating:500V AC/DC
Current rating:2A AC/DC
Withstanding voltage:1500V AC/minute
Temperature range: -40□ ~85℃
Insulation resistance:≥1000MΩ
Contact resistance:≤40mΩ
After environmental testing:≤80mΩ

X3700W M-02HF-LPSN
① ② ③ ④ ⑤ ⑥ ⑦

① Series No
② Category:W-WAFER
③ Welding Board Angle:M-Male
④ Row No.-Pin No.:02-Single Row
⑤ Plug the Pin&Special No.:HF-Halogen Free
⑥ Material:LP-LCP 94V-0
⑦ Plating Category:SN-Bright Tin Plating

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Matte Tin-Plated	Phosphor Bronze	Matte Tin-Plated	X3700WF
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finsh (Solder Tab)	Mates With Housing

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

www.xk-ig.cn www.helloxkb.com www.helloxkb.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: X3700WM-02HF-LPSN
DWN		DATE		VIEW:	PART NO.: 3.70mm BTB Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>XKB Connectivity(中国星坤)

Downloaded From Oneyac.com