




Specifications:

规格:

- Voltage rating:250V AC/DC
- 额定电压: 250V AC/DC
- Current rating:10A AC/DC
- 额定电流: 10A AC/DC
- Withstanding voltage:1500V AC/minute
- 耐受电压: 1500V AC/分钟
- Temperature range:-25℃~+85℃
- 温度范围: -25℃~+85℃
- Insulation resistance:≥1000MΩ
- 绝缘电阻: ≥1000MΩ
- Contact resistance:≤10mΩ
- 接触电阻: ≤10mΩ
- After environmental testing:≤20mΩ
- 环境测试后: ≤20兆欧



X5050 W R X-04B-XX SN XX
 ○ ○ ○ ○ ○ ○ ○ ○ ○ ○

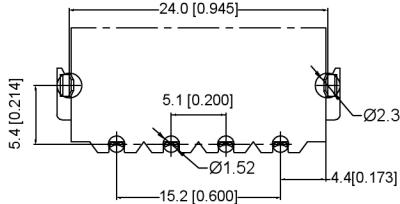

- ① Series No
- ② Category : WI-WAFER
- ③ Welding Board Angle : R-Right Angle 90°
- ④ Welding Wway: Blank-DIP
- ⑤ Row No.-Pin No.: XX-Single Row
- ⑥ Special Note: B-With buckle , the positive angle
- ⑦ Material: 6T-PA6T 94V-0 ; 9T-PA9T 94V-0
- N2-PA66 94V-2
- ⑧ Plating Category: SN-Bright Tin Plating
- ⑨ Color : Blank-Natural Color ; BK-Black

X5050WR-04B-N2 SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	Spcc	Tin-Plated	X5050H
X5050WR-04B-9T SN	Nylon 9T UL 94V-0					
X5050WR-04B-6T SN	Nylon 6T UL 94V-0					
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Metal/Band)	Finish (Metal/Band)	Mates With XKB Housing

Recommended P.C.B. Layout
 General Tolerance ±0.05

广东星坤科技股份有限公司

生		日
发		期
Δ		
文件工程章		
REVISIONS	DATE	REVISED
www.heloxkb.com		

	XKB	ANGLAR	±5°
		L ≤ 4	±0.2
		4 < L ≤ 16	±0.3
		16 < L ≤ 63	±0.4
		L > 63	±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: X5050WR-04B-XXSN
DWNN	DATE	VIEW: ④	PART NO.: 5.08mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
UNSPECIFIED TOLERANCES			WEIGHT 1.0g
VXB INDUSTRIAL PRECISION CO., LIMITED			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)