
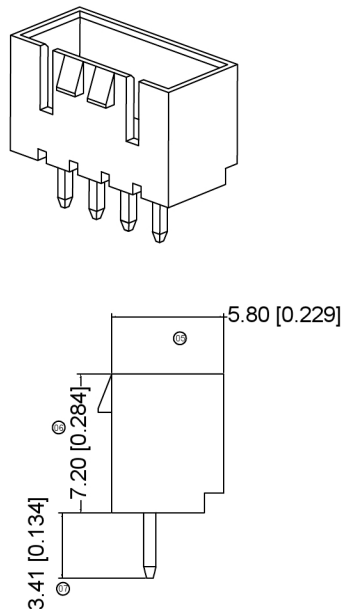



XKB

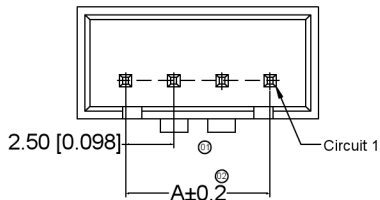

Specificationsxxb

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ XKB


After environmental testing:≤30mΩ

环境测试后: ≤30兆欧

X8821 W V X-XX L -NO SN

- ◎Series No.
- ◎Category:W-WAFER
- ◎Welding Board Angle: V-180°
- ◎Welding Way:S-SMT
- ◎Row No. Pin No.: XX-Single Row;
- ◎Plug the Pin&Special No.:L-With Lock
- ◎Material:NO-PA66 94V-0
- ◎Plating Category: SN-Bright Tin Plating

Poles	Dimension mm		Poles	Dimension mm	
	A	B		A	B
2	2.50	7.50	10	22.50	27.50
3	5.00	10.00	11	25.00	30.00
4	7.50	12.50	12	27.50	32.50
5	10.00	15.00	13	30.00	35.50
6	12.50	17.50	14	32.50	37.50
7	15.00	20.00	15	35.00	40.00
8	17.50	22.50	16	37.50	42.50
9	20.00	25.00			



广东星坤科技股份有限公司
Region:Reliefed P.C.B layout
General Tolerance:±0.05

生 日期
發 日期
文件工程章

X8821WV-XXL-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X8821H-L
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Housing

XKB	ANGLAR	±5°	DSND	SCALE: N/A	MODEL TYPE:	
	L ≤ 4	±0.2	DWVN	VIEW:	PART NO.:	
	4 < L ≤ 16	±0.3	CHKD	UNIT: mm/in	2.54 mm Crimp Style Connectors	
	16 < L ≤ 63	±0.4	APPD	SIZE: A4	DWG NO.:	
	L > 63	±0.5	VXP			
UNSPECIFIED TOLERANCES	INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)