



Specifications :

- Voltage rating: 500V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ



X9127 HI - XX A - PT XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: I-HSG+hardware
- ④ Row No.-Pin No.: XX-Single row
- ⑤ Plug the Pin & special No.: A-Double Deficiency
- ⑥ Material: PT-PBT 94V-0
- ⑦ Color: RE- Red; RD-purplish red

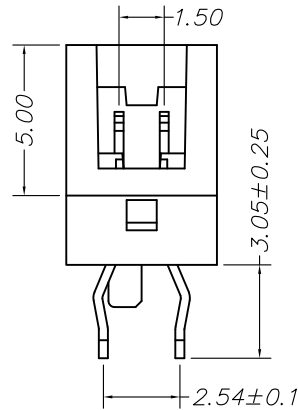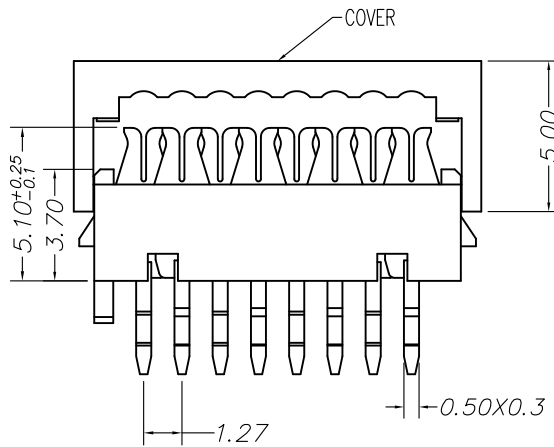

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
04	8.45	2.54	16	23.69	17.78
06	10.99	5.08	18	26.23	20.32
08	13.53	7.62	20	28.77	22.86
10	16.07	10.16	22	31.31	25.40
12	18.61	12.70	24	33.85	27.94
14	21.15	15.24	26	36.39	30.48

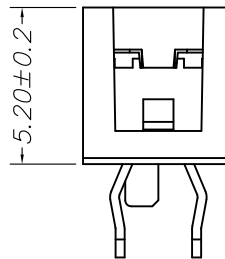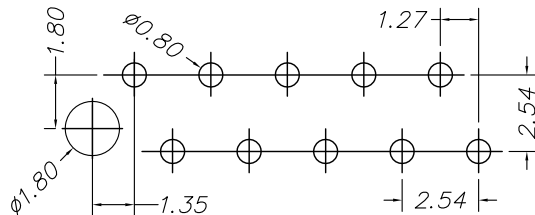

Recommended P.C. Board Layout

X9127HI-XXA-PTRD	PBT UL 94V-0 (purplish red)	Brass	Tin-Plated
X9127HI-XXA-PTRE	PBT UL 94V-0(Red)	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE:		
△ X					ANGULAR ±5°				X9127HI-XXA-PTXX		
△ X					L ≤ 4 ±0.2	DWN	DATE	VIEW:	PART NO.:		
△ X					4 < L ≤ 16 ±0.3	CHKD	DATE	UNIT: mm	1.27 mm Crimp Style Connectors		
△ X					16 < L ≤ 63 ±0.4	APPD	DATE	SIZE: A4	DWG NO.:		
△ X					L > 63 ±0.5						
REVISIONS Authorized Signature(s)						XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
									1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)