




(无缺、防呆)

REFERENCE MATING INTERFACE PATTERN
1.27 STRAGGERED PITCH x 1.5 ROW-DISTANCE

POLARISATION SLOT

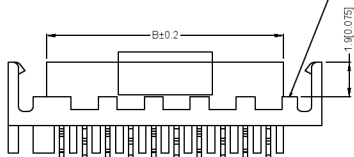

1.27x1.5MM SMT 母头
(有耳/有台/单缺/SMT)

Specifications:

规格:
Voltage rating 500V AC/DC
额定电压: 500V AC/DC
Current rating: 1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:1000V AC/minute
耐压电压: 1000V AC/分钟
Temperature range -40°C ~ +105°C
温度范围: -40°C ~ +105°C
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤20mΩ
接触电阻: ≤20mΩ
After environment testing: ≤30mΩ
环境试验后: ≤30mΩ

X9127 W V S -XX B -9T SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: XX-04P-26P
- ⑥ Plug the Pin & Special No.:
B-With boss and tail, With Ear, Concave
- ⑦ Material: 9T-Nylon 9T 94V-0
- ⑧ Plating Category: SN-Bright tin Plating
- ⑨ Color: RE-Red RD-purplish red

NUMBER OF POSITIONS	Dimensions(mm)			Qty./file
	A	B	C	
4	3.81	5.50	9.71	59
6	6.35	8.04	12.25	47
8	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

X9127WS-XXB-9TSNRD	Purplish red	PA9T UL 94V-0	Brass	Tin-Plated
X9127WS-XXB-9TSNRE	RED			
PART NO	Color	Material	Material(Pin)	Finish(Pin)

Recommended PCB Board Layout

生	日期
發	
Δ	
文件工程	REVISIONS
www.hellixb.com	www.hellixb.com

ANGLAR	±5°	DSND	DATE	SCALE: NA	MODEL TYPE:
L ≤ 4	±0.2	DWN	DATE	VIEW:	PART NO.:
4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	1.27 mm Crimp Style Connectors
16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4	DWG NO.:
L > 63	±0.5	VXD	DATE		X9127WS-XXB-9TSNXX
UNSPECIFIED TOLERANCES		INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
					1.0g
					SHEET 1/1
					REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)