


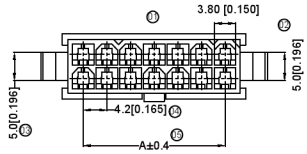





XKB




Recommend Mounting Dimension



Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	—	5.60	2*07	25.20	30.80
2*02	4.20	9.80	2*08	29.40	35.00
2*03	8.40	14.00	2*09	33.60	39.20
2*04	12.60	18.20	2*10	37.80	43.40
2*05	16.80	22.40	2*11	42.00	47.60
2*06	21.00	26.60	2*12	46.20	51.80

Specifications:

规格: XKB  
 Voltage rating: 600V AC/DC  
 额定电压: 600V AC/DC  
 Current rating: 9A AC/DC  
 额定电流: 9A AC/DC  
 Withstanding voltage: 1500V AC/minute  
 耐受电压: 1500V AC/分钟  
 Temperature range: -25°C +85°C  
 温度范围: -25°C +85°C  
 Insulation resistance: ≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
 Contact resistance: ≤10mΩ  
 接触电阻: ≤10mΩ XKB  
 After environmental testing: ≤20mΩ  
 环境测试后: ≤20mΩ  
 环境测试后: ≤20mΩ

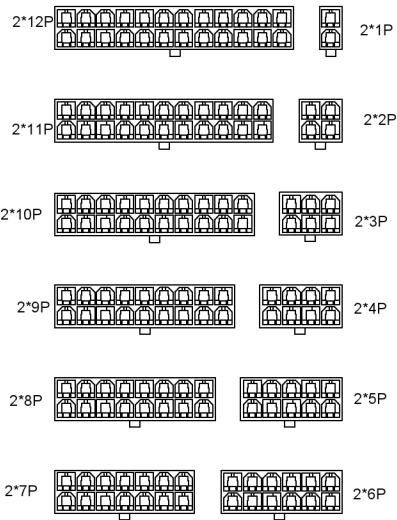

X9357 H F - 2 \* XX X - XX XX  
 ① ② ③ ④ ⑤

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: F-Female
- ④ Row No. - Pin No.: 2\*XX-2\*01P~2\*12P
- ⑤ Plug the Pin & special No.:  
 I-Without the Wing; G-With the Wing  
 ⑥ Material: N0-PA66 94V-0; N2-PA66 94V-2  
 ⑦ Color: Blank-Natural Color BK-Black

广东星坤科技股份有限公司

生 日期  
 文件工程章  
 REVISIONS  
 www.heloxkb.com

X9357HF-2*XX-N2BK	Nylon 66 94V-2 Black	X9357TM	X9357W Or 9357H	Without Ears
X9357HF-2*XXG-N2	Nylon 66 94V-2			With Ears
X9357HF-2*XXI-N2	Nylon 66 94V-2			Without Ears
X9357HF-2*XXG-N0	Nylon 66 94V-0			With Ears
X9357HF-2*XXI-N0	Nylon 66 94V-0			Without Ears
PART NO	Material			Suitable XKB Terminal

XKB	DSND	DATE	SCALE: N/A	MODEL TYPE: X9357HF-2*XXG-N2
ANGLAR L ≤ 4 ± 5°	DWNN	DATE	VIEW:	PART NO.: 2.40mm Crimp Style Connectors
4 < L ≤ 16 ± 0.3	CHKD	DATE	UNIT: mm/in	DWG NO.:
16 < L ≤ 63 ± 0.4	APPD	DATE	SIZE: A4	
L > 63 ± 0.5				
UNSPECIFIED TOLERANCES	INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
				SHEET 1/1
				REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)