




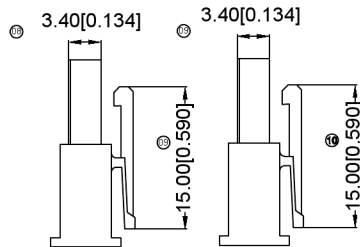





XKB



XKB
Specifications:

规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:9A AC/DC
额定电流: 9A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-25°C.+85°C
温度范围: -25°C.+85°C
Insulation resistance:≥1000MQ
绝缘电阻: ≥100MQ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

X9357HM-XX-XX-XX-XX

- 01 Series No.
- 02 Category:H-HSG
- 03 Welding Board Angle:M-Male housing
- 04 RowNo.-PinNo.:XX-02P-16P
- 05 Plug the Pin & special No.:
- 06 Material:N0-PA66 94V-0:N2-PA66 94V-2
- 07 Color:Blank-Natural Color

| Poles | Dimensions(mm) | | |
|-------|----------------|-------|-------|
| | A | B | C |
| 02 | 4.20 | 9.60 | 7.50 |
| 03 | 8.40 | 13.80 | 11.60 |
| 04 | 12.60 | 18.00 | 15.80 |
| 05 | 16.80 | 22.20 | 20.20 |
| 06 | 21.00 | 26.40 | 24.10 |

| | | | |
|-------------------------|----------------|-----------------------|-----------------------|
| X9357HM-XX-N2 | Nylon 66 94V-2 | X9357TF | X9357W Or 9357H |
| X9357HM-XX-N0 | Nylon 66 94V-0 | | |
| 广东星坤科技股份有限公司 PART NO | Material | Suitable XKB Terminal | Suitable XKB Terminal |

生 日期

文件工程章

REVISIONS

DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

www.heloxkb.com

| | | | | |
|------------------|------|------|-------------|--|
| XKB | DSND | DATE | SCALE: NA | MODEL TYPE: X9357HM-XX-XX |
| ANGLR ±5° | DWN | DATE | VIEW: | PART NO.: 2.40mm Crimp Style Connectors |
| L ≤ 4 ±0.2 | CHKD | DATE | UNIT: mm/in | DWG NO.: |
| 4 < L ≤ 16 ±0.3 | APPD | DATE | SIZE: A4 | |
| 16 < L ≤ 63 ±0.4 | | | | WEIGHT SHEET REVISION 1.0g 1/1 A0 |
| L > 63 ±0.5 | | | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)