


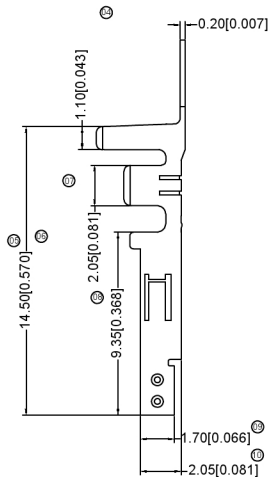


XKB

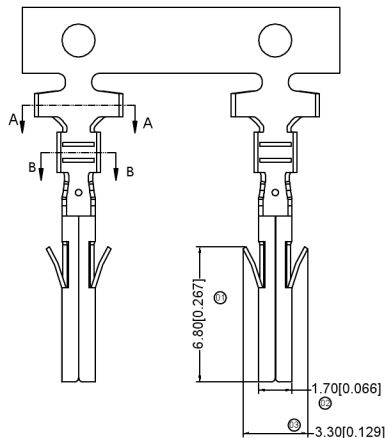

Specifications:

规格: **XKB**
 Voltage rating: 600V AC/DC
 额定电压: 600V AC/DC
 Current rating: 9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage: 1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range: -25°C +85°C
 温度范围: -25°C +85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ XKB
 After environmental testing: ≤20兆欧
 环境测试后: ≤20兆欧

X9357TF-XSN X-H

- 01 Series Number
- 02 Category: T-terminal
- 03 Shape: F-Female
- 04 Material: B-Brass; P-Phosphor Bronze
- 05 Plating style: SN-Bright tin plating
- 06 Plating method:
Blank-Stamping before plating;
- 07 Special No: H-High Leads

X9357TF-PSN-H	Phosphor Bronze	AWG#16-24	3.10mm(Max)	Stamping Before Plating :30u" MIN. Ni70u"Sn MIN.	X9357HM
X9357TF-BSN-H	Brass				
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable XKB

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

www.heloxkb.com

XKB	ANGLAR	±5°	DSND	DATE	SCALE: NA	MODEL TYPE: X9357TF-XSN-H		
	L ≤ 4	±0.2	DWVN	DATE	VIEW:	PART NO.: 2.40mm Crimp Style Connectors		
	4 < L ≤ 16	±0.3	CHKD	DATE	UNIT: mm/in	DWG NO.:		
	16 < L ≤ 63	±0.4	APPD	DATE	SIZE: A4			
	L > 63	±0.5						
UNSPECIFIED TOLERANCES			INDUSTRIAL PRECISION CO., LIMITED			WEIGHT	SHEET	REVISION
						1.0g	1/1	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)