





XXB

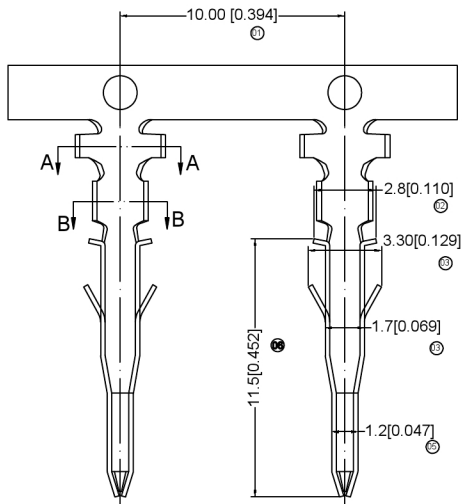

SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1

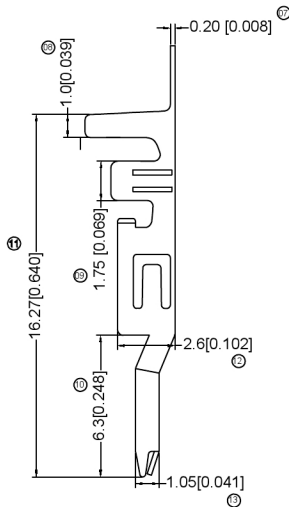

Specifications:

规格: XKB
 Voltage rating: 600V AC/DC
 额定电压: 600V AC/DC
 Current rating: 9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage: 1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range: -25°C +85°C
 温度范围: -25°C +85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing: ≤20兆欧
 环境测试后: ≤20兆欧

X9357WR X-2XX X-XX XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦

X9357TM-X SNX-X
 ① ② ③ ④ ⑤ ⑥ ⑦

- 1 Series No.
- 2 Category: T-Terminal
- 3 Appearance type: M-Male Terminal
- 4 Material: B-Brass; P-Phosphor Bronze
- 5 Plating Style: SN-Bright Tin Plating
- 6 Plating Method:
Blank-Stamping before Plating
- 7 Mold NO/MARK&Special NO

X9357TM-PSN	Phosphor Bronze	AWG#18-22	3.00mm(Max)	Stamping Before Plating 30u" Ni/0u" Sn	X9357HF
X9357TM-BSN	Brass				
PART NO	Material	Wire Range	Insulation O D	Finish	Suitable XKB

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

DATE REVISED APPROVED

UNSPECIFIED TOLERANCES

www.heloxkb.com

XSND	DATE	SCALE: N/A	MODEL TYPE: X9357TM-BSN-H
DWVN	DATE	VIEW: ①	PART NO.: 2.40mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
INDUSTRIAL PRECISION CO., LIMITED			WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)