
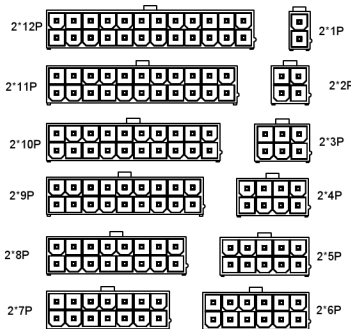






XKB



Specifications:

- 规格: XKB
Voltage rating: 600V AC/DC
额定电压: 600V AC/DC
Current rating: 9A AC/DC
额定电流: 9A AC/DC
Withstanding voltage: 1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range: -25°C +85°C
温度范围: -25°C +85°C
Insulation resistance: ≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤10mΩ
接触电阻: ≤10mΩ
After environmental test: ≤20mΩ
环境测试后: ≤20mΩ

X9357WR X-2*XX X-XX XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

- 01 Series No
- 02 Category W-wafer
- 03 Welding Board Angle R-90
- 04 Welding Way: Blank-DIP
- 05 Row No -Pin No: 2*xx-Double
- 06 Plug the Pin&Special NO. F-FHF
- 07 Material:
 NG-PA66 94V-0;N2-PA66 94V-7
 LP-LCP94V-0 BT-PA6T94V-0-9T-PA9T94V-0
- 08 Planting Category:
 V.All Gold-Plated*01-Gold Flash;
 SN-Bright tin plating 70u"
- 09 Color:Blank-Natural Color BK-Black

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	5.60	—	2*07	30.80	25.20
2*02	9.80	4.20	2*08	35.00	29.40
2*03	14.00	8.40	2*09	39.20	33.60
2*04	18.20	12.60	2*10	43.40	37.80
2*05	22.40	16.80	2*11	47.60	42.00
2*06	26.60	21.00	2*12	51.80	46.20

X9357WR-2*XX-N2V01XX	Nylon 66 UL 94V-0	Brass	Gold-Flash	X9357H	1,000P/CS
X9357WR-2*XX-NGSNXX	Nylon66 UL94V-0	Brass	Tin-Plated		
X9357WR-2*XX-N2V01XX	Nylon66 UL 94V-2	Brass	Gold-Flash		
X9357WR-2*XX-N2SNXX	Nylon66 UL 94V-2	Brass	Tin-Plated		
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB	Qty/Bag

广东星坤科技股份有限公司

生	日期	XKB	ANGLAR	±5°	
發			L ≤ 4	±0.2	
			4 < L ≤ 16	±0.3	
			16 < L ≤ 63	±0.4	
			L > 63	±0.5	
Δ	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
文件工程章					

DSND	DATE	SCALE: N/A	MODEL TYPE: X9357WR-2*XX-XXXX
DWNN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	4.2 mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
WEIGHT	SHEET	REVISION	
1.0g	1/1	A0	

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)