



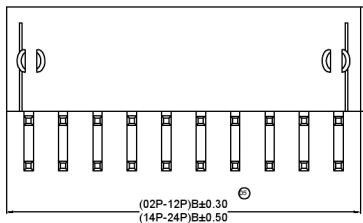


XKB

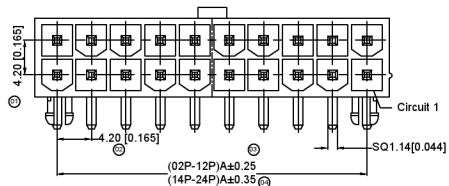


X9357 W R X 2 XX SX XX SN XX

- 01 Series No.
- 02 Category:W-wafer
- 03 Welding Board Angle:R-90°
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No.: 2*XX-Double row
- 06 Special NO.
- 07 Material: NO-PA6694V-0;N2-PA6694V-2 LP-LCP 94V-0
- 08 Plating Category: SN-Bright tin plating 70u"
- 09 Color: Blank-natural color BK-BLACKBL-BLUE RE-RED

Specifications:

规格: XKB
 Voltage rating:600V AC/DC
 额定电压: 600V AC/DC
 Current rating:9A AC/DC
 额定电流: 9A AC/DC
 Withstanding voltage:1500V AC/minute
 耐受电压: 1500V AC/分钟
 Temperature range:-25°C+85°C
 温度范围: -25°C+85°C
 Insulation resistance:≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance:≤10mΩ
 接触电阻: ≤30mΩ
 After environmental test:≤20mΩ
 环境测试后: ≤20兆欧

Poles	Dimensions(mm)	
	A	B
2*01	---	5.40
2*02	4.20	9.60
2*03	8.40	13.80
2*04	12.60	18.00
2*05	16.80	22.20
2*06	21.00	26.40
2*07	25.20	30.60
2*08	29.40	34.80
2*09	33.60	39.00
2*10	37.80	43.20
2*11	42.00	47.40
2*12	46.20	51.60



X9357WR-2* XXS-LPSN	LCP UL 94V-0	Brass	Tin- Plated	X9357H
X9357WR-2*XXSF-NOSNBK	Nylon 66 UL 94V-0 Halogen Free			
X9357WR-2*XXS-N0SNXX	Nylon 66 UL 94V-0			
X9357WR-2* XXS-N2SNXX	Nylon 66 UL 94V-2			
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

www.helkxb.com

XKB	ANGLAR ±5°	DSND	DATE	SCALE: NA	MODEL TYPE:
	L ≤ 4 ±0.2	DWNN	DATE	VIEW:	PART NO.:
	4<L≤16 ±0.3	CHKD	DATE	UNIT: mm/in	2.40mm Crimp Style Connectors
	16<L≤63 ±0.4	APPD	DATE	SIZE: A4	DWG NO.:
	L > 63 ±0.5				
UNSPECIFIED TOLERANCES		INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
					1.0g
					SHEET
					1/1
					REVISION
					A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)