




■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤40mΩ

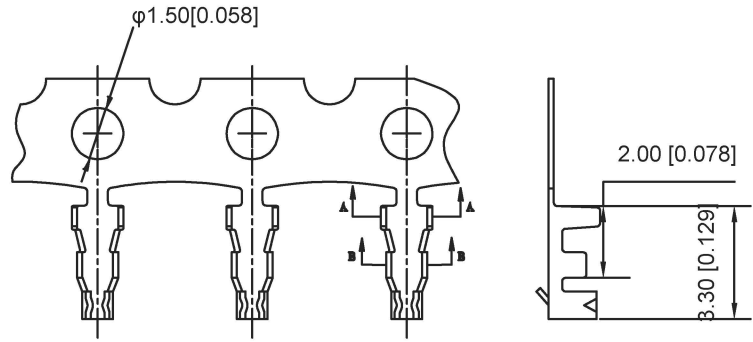

X9821TF-P-XX

- ① Series Number
- ② Category : T-terminal
- ③ Welding Board Angle : F-Fmale
- ④ Material:P-Phosphor bronze
- ⑤ Plating style:V01-Gold Flash;SN-Bright tin plating
SN2-Bright Tin Plating 120u"Min

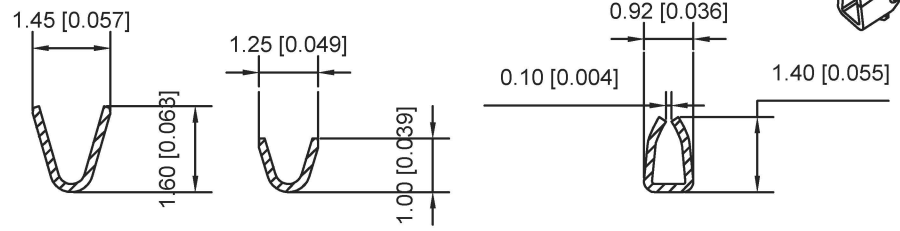

SECTION:A-A
SCALE:1:1

SECTION:B-B
SCALE:1:1

SECTION:C-C
SCALE:1:1

| | | | | | |
|----------------|-----------------|------------|----------------|---|----------------|
| X9821TF-XX-SN2 | | | | Stamping Before Plating:50u" Min Ni;120u"Sn Min | |
| X9821TF-PV01 | Phosphor Bronze | AWG#28-32 | 1.0mm(Max) | Stamping Before Plating:30u" Min Ni;Whole Gold:Gold Flash | X9821HM-PSN |
| X9821TF-PSN | | | | Stamping Before Plating:30u" Min Ni;70u"Sn Min | |
| PART NO | Material | Wire Range | Insulation O.D | Finish | Suitable X K B |

广东星坤科技股份有限公司

| | | |
|----|------|-------------|
| 生效 | ΔX | 日期 |
| | ΔX | 日期 |
| | ΔX | 日期 |
| | MARK | DESCRIPTION |

| REVISIONS | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|-----------|------|---------|----------|------------------------|
| | | | | |

| | | | |
|---------------------------------------|------|-------------|--|
| DSND | DATE | SCALE: N/A | MODEL TYPE: X9821TF-PXX |
| DWN | DATE | VIEW: | PART NO.: 1.25mm Crimp Style Connectors |
| CHKD | DATE | UNIT: mm/in | DWG NO.: |
| APPD | DATE | SIZE: A4 | |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT 1.0g |
| | | | SHEET 1/1 |
| | | | REVISION A0 |

文件工程章

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)