

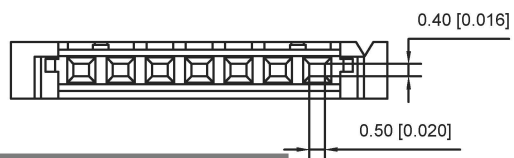


04P~30P Double Salient
Scale 1:1



04P~30P Single Salient
Scale 1:2

■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing : ≤40mΩ

X9827 H-XX-N0 HF



- ① Series No.
- ② Category : H-HSG
- ③ Row No.-Pin No.: XX-02P~30P
- ④ Material :N0-PA66 94V-0
- ⑤ HF-Halogen free

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	5.72	2.72	11	12.50	16.97	13.97
03	2.50	6.97	3.97	12	13.75	18.22	15.22
04	3.75	8.22	5.22	13	15.00	19.47	16.47
05	5.00	9.47	6.47	14	16.25	20.72	17.72
06	6.25	10.72	7.72	15	17.50	21.97	18.97
07	7.50	11.97	8.97	16	18.75	23.22	20.22
08	8.75	13.22	10.22	20	23.75	28.22	25.22
09	10.00	14.47	11.47	25	30.00	34.47	31.47
10	11.25	15.72	12.72	30	36.25	40.72	37.72

X9827H-XX-N0HF	Nylon 66 UL 94V-0 Halogen-Free		
X9827H-XX-N0	Nylon 66 UL 94V-0	X9827T	X9827V
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司

生效

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X9827H-XX-N0
DWN	DATE	VIEW:	PART NO.: 1.25mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)