



■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing : $\leq 40m\Omega$

X9827 T-P XX

- ① Series Number
- ② Category : T-terminal
- ③ Material:P-Phosphor bronze
- ④ Plating style:V01-Gold Flash;V03-Gold 3u"
SN-Bright tin plating 70u"Min;
SN1-Bright tin plating 100u"Min

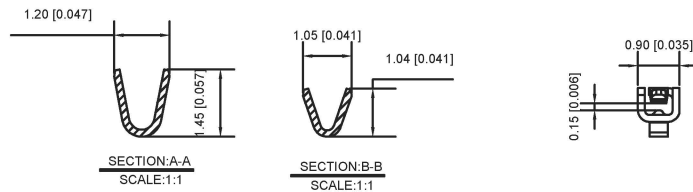

X9827T-PSN1	Phosphor Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating 30u" Ni;100u"Sn Min	
X9827T-PA01	Phosphor Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating 30u" Ni;Whole Gold Gold Flash	X9827H
X9827T-PV03	Phosphor Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating 30u" Ni;Whole Gold 3u" Min	
X9827T-PSN	Phosphor Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating 30u" Ni;70u" Sn Min	
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable X.KB

广东星坤科技股份有限公司

生效

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X9827T-PSN
DWN	DATE	VIEW:	PART NO.: 1.25mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

文件工程章

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)