



SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1




SECTION: C-C
SCALE: 1:1

- Specifications :
- Voltage rating: 150V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -35°C~+85°C
 - Insulation resistance: ≥500MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ

X9862 T X-P XXX X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating style: V01-Gold Flash ; SN-Bright tin plating ;
- ⑥ Plating method: Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

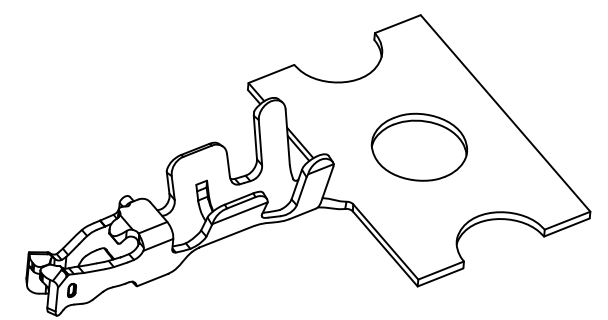

X9862T-PV01	Phosphor Bronze	AWG#26-32	1.00mm(Max)	Stamping Before Pating:30u" Ni;Whole Gold :Gold Flash	x9862H
X9862T-PSN				Stamping Before Plating:30u" Ni;70u"Sn Min.	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	± 0.5
REVISIONS				UNSPECIFIED TOLERANCES		

DSND		DATE		SCALE: N/A	MODEL TYPE: X9862T-PXXX	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm	1.25mm Crimp Style Connectors	
APPD		DATE		SIZE: A4	DWG NO.:	
				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0

XKB INDUSTRIAL PRECISION CO., LIMITED

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)