


RECOMMENED P.C.B LAYOUT(TOP VIEW)  
GENERAL TOLERANCE ±0.05

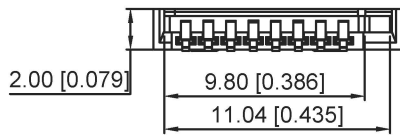

NOTE:  
1. ELECTRICAL CHARACTERISTICS  
1-1. CONTACT RESISTANCE  
80 milliohms MAX.  
1-2. INSULATION RESISTANCE:  
1,000 Megohms MIN  
1-3. DIELECTRIC WITHSTANDING  
VOLTAGE: 500V AC FOR 1 MINUTE  
2. MECHANICAL CHARACTERISTICS  
RETENTION FORCE: MIN. 100gf/PIN  
3. RoHS 2002/95/EC COMPLIANT

ITEM	PART NAME	QTY	MATERIAL	FINISHING
③	PEG	1	COPPER ALLOY	
②	Terminal	8	COPPER ALLOY	
①	Housing	1	HI-TEMP. PLASIC UL 94V-0	BLACK

广东星坤科技股份有限公司

生效日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGLAR ±5°
					L ≤ 4 ±0.2
					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: TF CARD CONN
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	XKTF-004
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET
				1.0g	1/1
				REVISION	A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)