

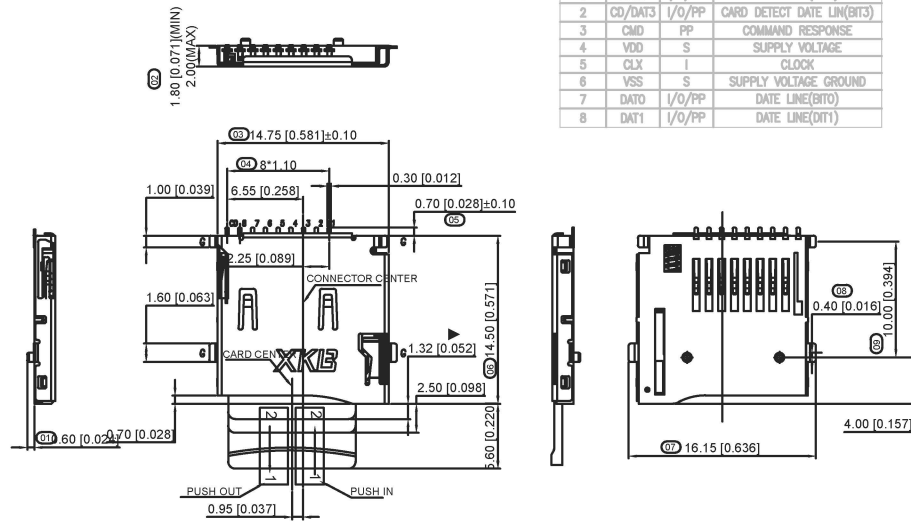


PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)

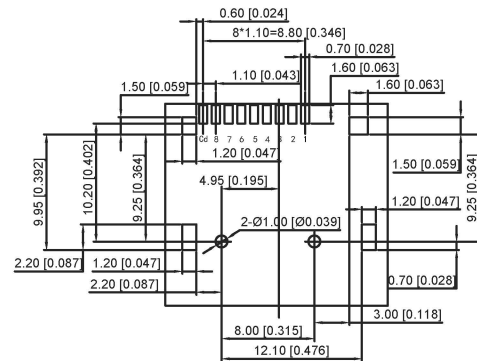

Specification:

- Electrical Characteristics:
  - Contact Current Rating:0.5 Amperes.
  - Dielectric Withstanding Voltage:AC500V r.m.s.
  - Insulation Resistance:1000 MΩ Minimum.
  - Contact Resistance:40 mΩ Maximum.
- Environmental:
  - Operating Temperature:-25°C~+90°C.
- Environmental:
  - Mating Cycles:5,000 Insertions.
- Mechanical Characteristics:
  - Card Push Insertion/Out Force:0.2~1.40kgf.
  - Contact Separation Force:0.20kgf Minimum.
- Material:
  - Insulator:HI-Temp Plastic UL 94V-0 Rated.
  - Contact:Copper Alloy(t=0.15mm).
  - Shell:Stainless Steel(t=0.15mm).
  - Spring:SWP.
- Make is FAI test Dimension
  - ▼ Make is major test Dimension



XKTF-015-X

G=GOLD 1u"  
N=NICKEL 80u"

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
④	Spring	1	SWP	
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

RECOMMENDED P.C.B HOLE LAYOUT  
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

广东星坤科技股份有限公司

生效日期

文件工程章

www.hellokx.com www.hellokx.com www.hellokx.com

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	TF CARD CONN
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
			XKTF-015-X
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT SHEET REVISION
			1.0g 1/1 A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)