

东莞市祥如电子有限公司


产品规格书

ITEM	XRRH3.5*4.7*0.8 TAPING
PART NO.	
ELECTRICAL REQUIREMENTS	IMPEDANCE Z:48 MIN OHM(100MHZ)

TEST MEHOD

APPEARANCE STANDARD	VISION
INSPECTION LEVEL	MIL-SID-105D AQL=0.1
CHARACT&SIZE	LEVEL S-3
SURFACE	LEVEL II
TEST EQUIPMENT	HP-4191A
TEST FREQUENCY	100MHZ
COIL SPEC	T.C.Φ0.55*63m/m

DIMENSION (UNIT:mm)

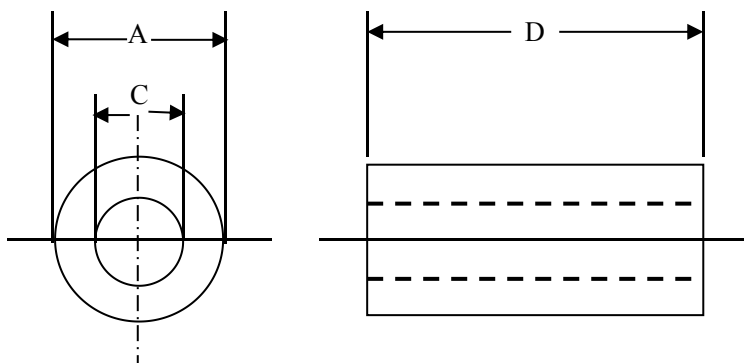


$$A=3.50 \pm 0.20\text{m/m}$$

$$C=0.80 \pm 0.20\text{m/m}$$


$$D=4.70 \pm 0.20\text{m/m}$$

TEST DATA


CUSTOMER		QUANTITY	
ITEM	XRRH3.5*4.7*0.8 TAPING	COIL SPEC	
PART NO.		TEST FREQUENCY	100MHZ
HUMIDITY	63%	TEST EQUIPMENT	HP-4191A
TEMPERATURE	23℃		
	TEST RESOLUTION		
	Z MHZ	Z1 10MHZ	Z2 100MHZ
	Ω MIN	Ω MIN	48 Ω MIN
SPEC			
1			57
2			55
3			58
4			58
5			60
6			
7			
8			
9			
10			
MEAN			
R			

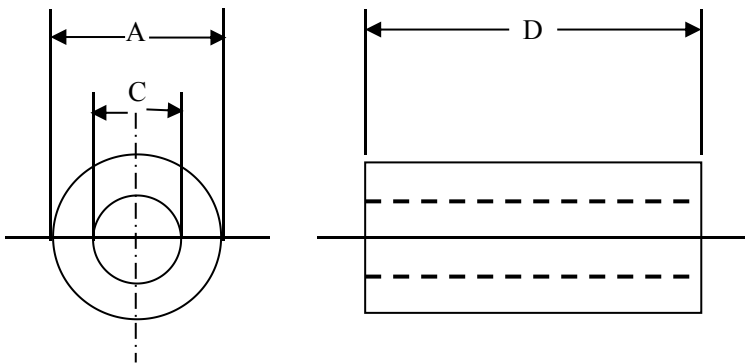

ITEM : L5 XRRH3.5*4.7*0.8 TAPING

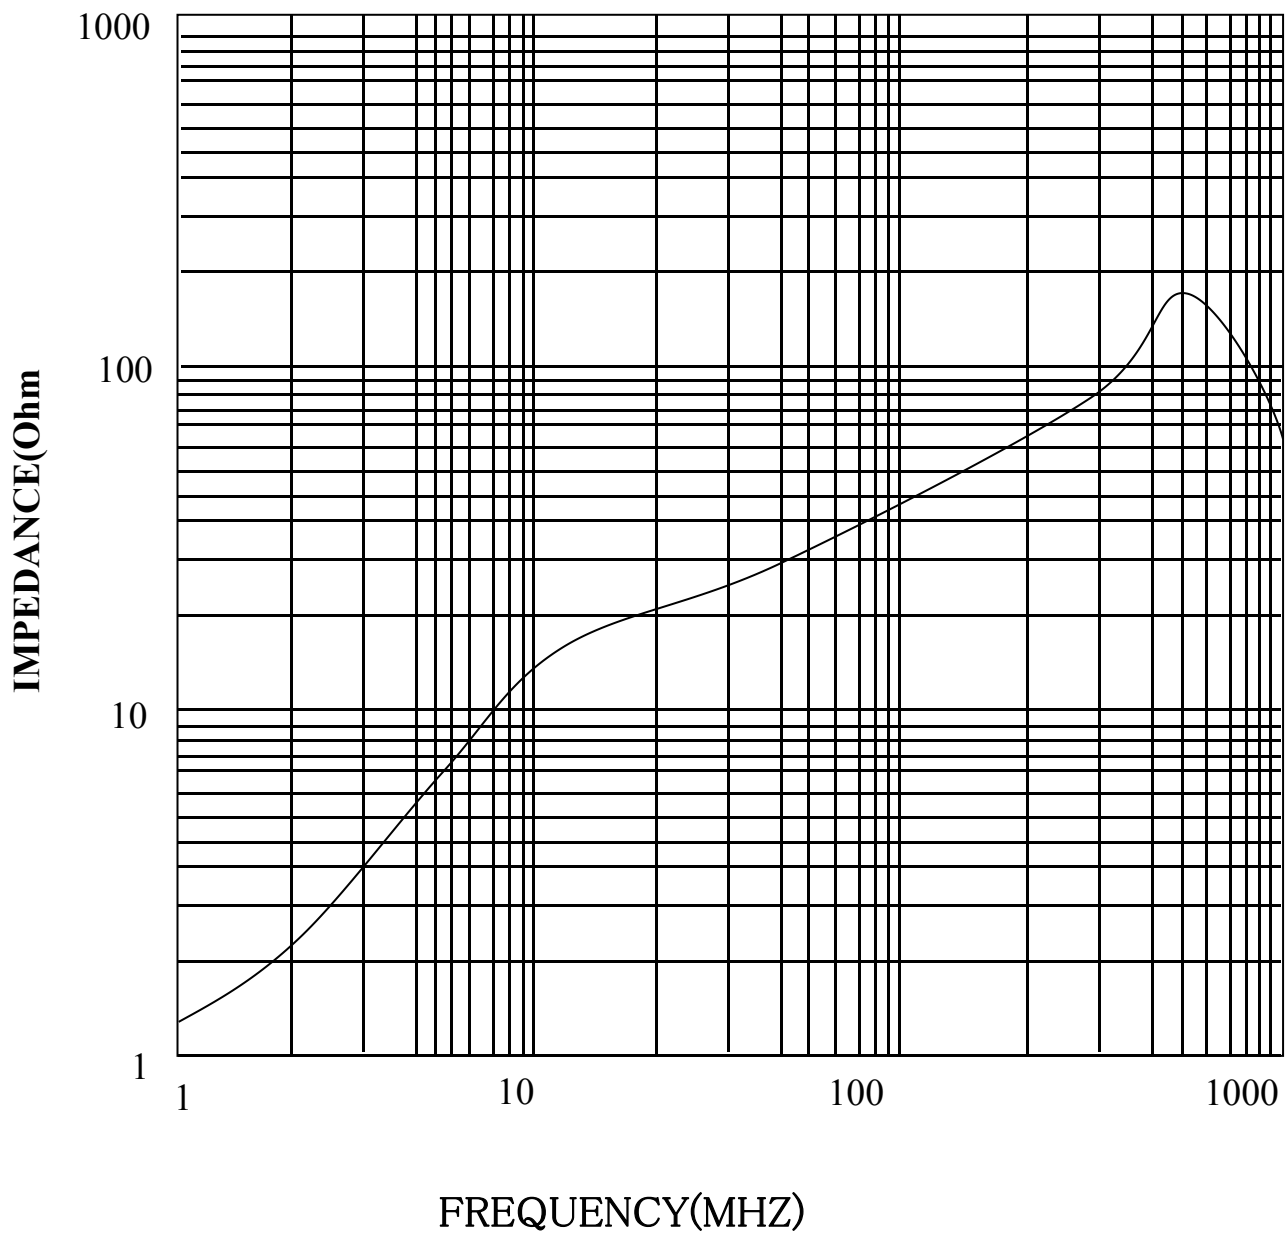

METER: HP-4191A





ITEM	XRRH3.5*4.7*0.8 TAPING
PART NO.	

PACKAGING

Available in tape and reel bulk

TAPE DIMENSION:

TYPE	B	E	F	H	I	J	P	d1-d2
XRRH3.5*4.7*0.8	63.00	6.00	52.0	4.20	1.35	0.80	5.00	1.20
	±3.00	±0.50	±1.50	MIN	MAX	MAX	±0.50	MAX

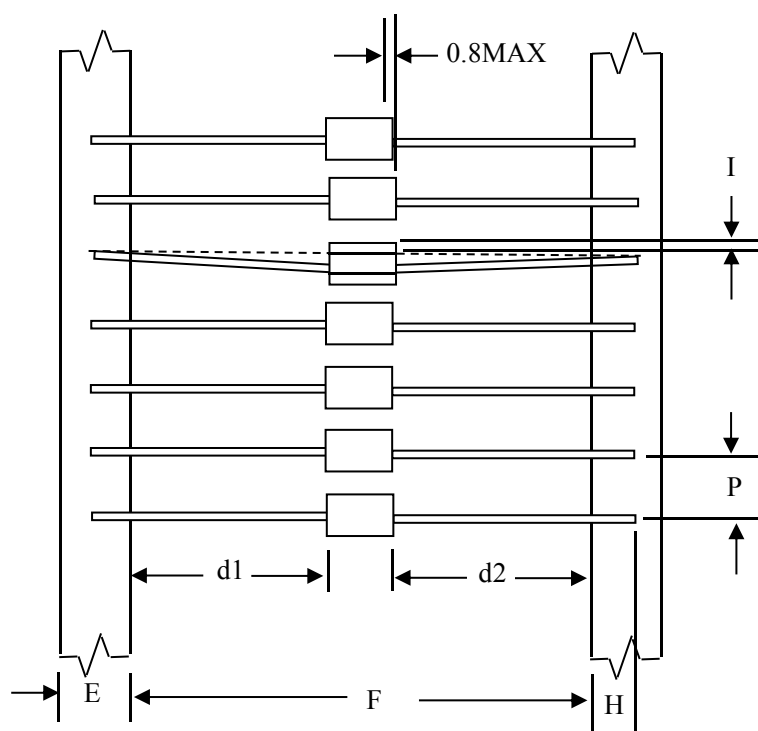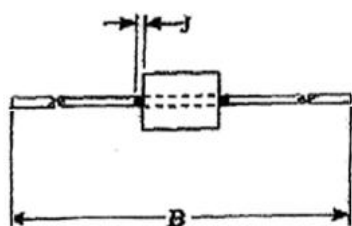

单击下面可查看定价，库存，交付和生命周期等信息

[>>XR\(祥如\)](#)