



# 产品承认书 SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRR6H-6\*10-2.5T

我司品名:

OUR PART NAME

Six-hole magnetic beads

送样日期:

DATE SAMPLES

数量:

QUANTITY

## 制造确认 MANUFACTURER APPROVE

| 拟制 DRAWN   | 审核 CHECKED | 确认 APPROVED   |
|------------|------------|---------------|
| HuFangting | RaoPing    | Li Zhengxiong |

## 客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION:

6x10-2.5T 600Ω Six-hole magnetic beads

检查结果: ☐ 合格 ☐ 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

email: dgxiangru@126.com


## 产品承认书

### SPECIFICATION FOR APPROVAL

|                        |                 |                       |  |
|------------------------|-----------------|-----------------------|--|
| 客户名称<br>CUSTOMER       |                 | 日期<br>DATE            | 2024-10-08                             |
| 客户物料编号<br>CUSTOMER P/N |                 | 客户规格型号<br>DESCRIPTION | 6x10-2.5T 600Ω Six-hole magnetic beads |
| 我司物料编号<br>OUR PART NO  | XRR6H-6*10-2.5T | 我司品名<br>OUR PART NAME | Six-hole magnetic beads                |

外观尺寸 Appearance of size

单位 Unit: mm

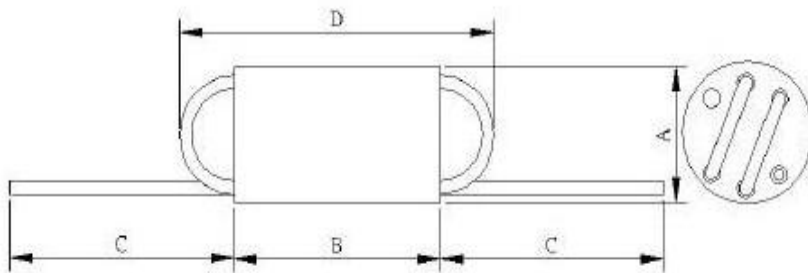

|   |         |   |          |   |       |   |       |
|---|---------|---|----------|---|-------|---|-------|
| A | 6.0±0.2 | B | 10.0±0.2 | C | 23±10 | D | 14max |
|---|---------|---|----------|---|-------|---|-------|

材料表:

Material list:

| 部品名<br>Department name | 使用材料<br>used material  | 材料编号<br>Material number |
|------------------------|--|-------------------------|
| CORE                   | JR6H   | GM-JR6H-6*10            |
| 线材<br>wire rod         | Φ0.5mm (无铅镀锡铜包钢线绕2.5T)<br>(lead-free tin-plated copper-clad steel wire winding 2.5T) | MT2100602.5T            |

产品承认书  
SPECIFICATION FOR APPROVAL

|                        |                 |                       |   |
|------------------------|-----------------|-----------------------|---|
| 客户名称<br>CUSTOMER       |                 | 日期<br>DATE            | 2024-10-08                                |
| 客户物料编号<br>CUSTOMER P/N |                 | 客户规格型号<br>DESCRIPTION | 6x10-2.5T 600Ω Six-hole<br>magnetic beads |
| 我司物料编号<br>OUR PART NO  | XRR6H-6*10-2.5T | 我司品名<br>OUR PART NAME | Six-hole magnetic beads                   |

## 电性能参数

## Electrical performance parameters

|                       |                              |                        |                            |
|-----------------------|------------------------------|------------------------|----------------------------|
| 项目<br>project         | 规格 (2.5TS)<br>specifications | 测试条件<br>test condition | 测试仪器<br>Testing instrument |
| 阻抗 (Z)<br>impedance   | 600Ω min                     | 100MHz                 | HP-4291B                   |
| 电感量 (L)<br>Inductance | 10uH±25%                     | 1KHz/0.25V             | TH2829A                    |

## 作业工序 Working procedure:

(1) 穿线: 根据图纸要求, 绕2.5圈。

Threading: according to the requirements of the drawings, wrap it around 2.5 times.

(2) 剪脚: 根据图线的尺寸要求。

Cutting feet: according to the size requirements of the drawing line.

(3) 外观检查。

Visual inspection.

(4) 电气特性检查 (参照上記电气特性)

Electrical characteristics inspection (refer to the above electrical characteristics)

## 存储条件 Storage conditions

(1) 存放货物的库房应满足以下条件: 温度: 23℃, 相对湿度: 63%。The warehouse for storing goods shall meet the following conditions: temperature: 23℃, relative humidity: 63%.

(2) 禁止将产品保管在腐蚀性物质中, 否则将引起端头氧化, 导致降低焊接性。It is forbidden to store the product in corrosive substances, otherwise it will cause oxidation of the end and reduce the weldability.

(3) 为了避免受潮气、灰尘等物质的影响, 产品应保管于货架上。

In order to avoid the influence of moisture, dust and other substances, the product should be kept on the shelf.

(4) 产品保管在库房中, 应避免热冲击、振动以及直接光照等等。

When the products are stored in the warehouse, thermal shock, vibration and direct light should be avoided.

(5) 产品应密封包装。

Products should be sealed and packaged.

|            |            |               |  |
|------------|------------|---------------|--|
| 制表 MADE    | 审核 CHECKED | 批准 APPROVED   |  |
| HuFangting | RaoPing    | Li Zhengxiong |  |

单击下面可查看定价，库存，交付和生命周期等信息

[>>XR\(祥如\)](#)