



ITEM	XRRH 3.5*3.0*0.8TAPING
PART NO.	
ELECTRICAL REQUIREMENTS	IMPEDANCE Z: 35 MIN OHM(100MHZ)

TEST MEHOD

APPEARANCE STANDARD	VISION
INSPECTION LEVEL	MIL-SID-105D AQL=0.1
CHARACT&SIZE	LEVEL S-3
SURFACE	LEVEL II
TEST EQUIPMENT	HP-4191A
TEST FREQUENCY	100MHZ
COIL SPEC	

DIMENSION

(UNIT:mm)

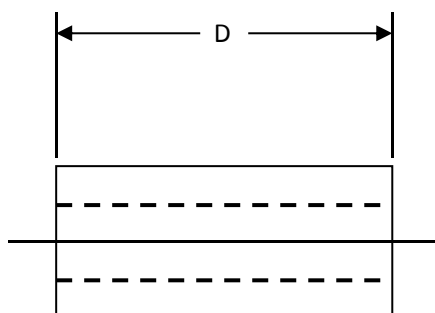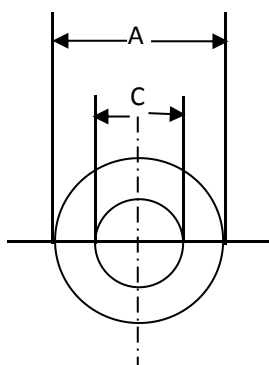

$$A=3.50 \pm 0.20\text{mm}$$

$$C=0.80 \pm 0.20\text{mm}$$

$$D=3.00 \pm 0.20\text{mm}$$



ITEM	XRRH 3.5*3.0*0.8TAPING
PART NO.	

PACKAGING

Available in tape and reel bulk

TAPE DIMENSION:

TYPE	B	E	F	H	I	J	P	d1-d2
XRRH3.5*3.0*0.8	63.00	6.00	52.2	4.20	1.35	0.80	5.00	1.20
	±3.00	±0.50	±1.50	MIN	MAX	MAX	±0.50	MAX

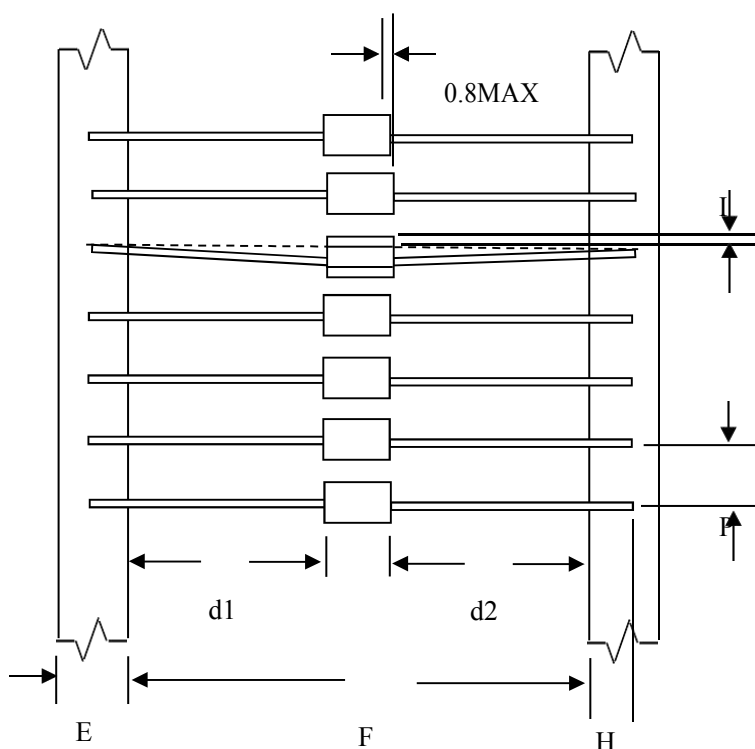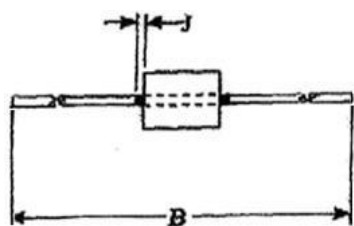


东莞市祥如电子有限公司


DONGGUAN XIANGRU ELECTRONICS CO., LTD

TEST DATA

CUSTOMER				QUANTITY					
ITEM		XRRH 3.5*3.2*0.8 TAPING		COIL SPEC					
PART NO.				TEST FREQUENCY		100MHZ			
HUMIDITY		63%		TEST EQUIPMENT		HP-4191A			
TEMPERATURE		23℃							
	TESTRESOLUTION			DIMENSION(UNIT:mm)					
	Z MHZ	Z1 MHZ	Z2 100MHZ	A	B	C	D	E	F
SPEC	Ω MIN	Ω MIN	35 Ω MIN	3.50 ±0.20		0.80 ± 0.20	3.00 ±0.20		
1			38	3.45		0.80	3.20		
2			37	3.48		0.85	3.12		
3			41	3.50		0.90	3.15		
4			39	3.52		0.98	3.18		
5			42	3.55		0.99	3.19		
6									
7									
8									
9									
10									
MEAN									
R									

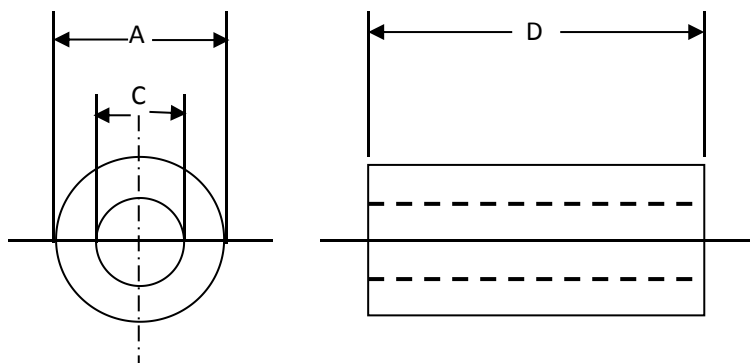

ITEM: XRRH 3.5*3.0*0.8 TAPING

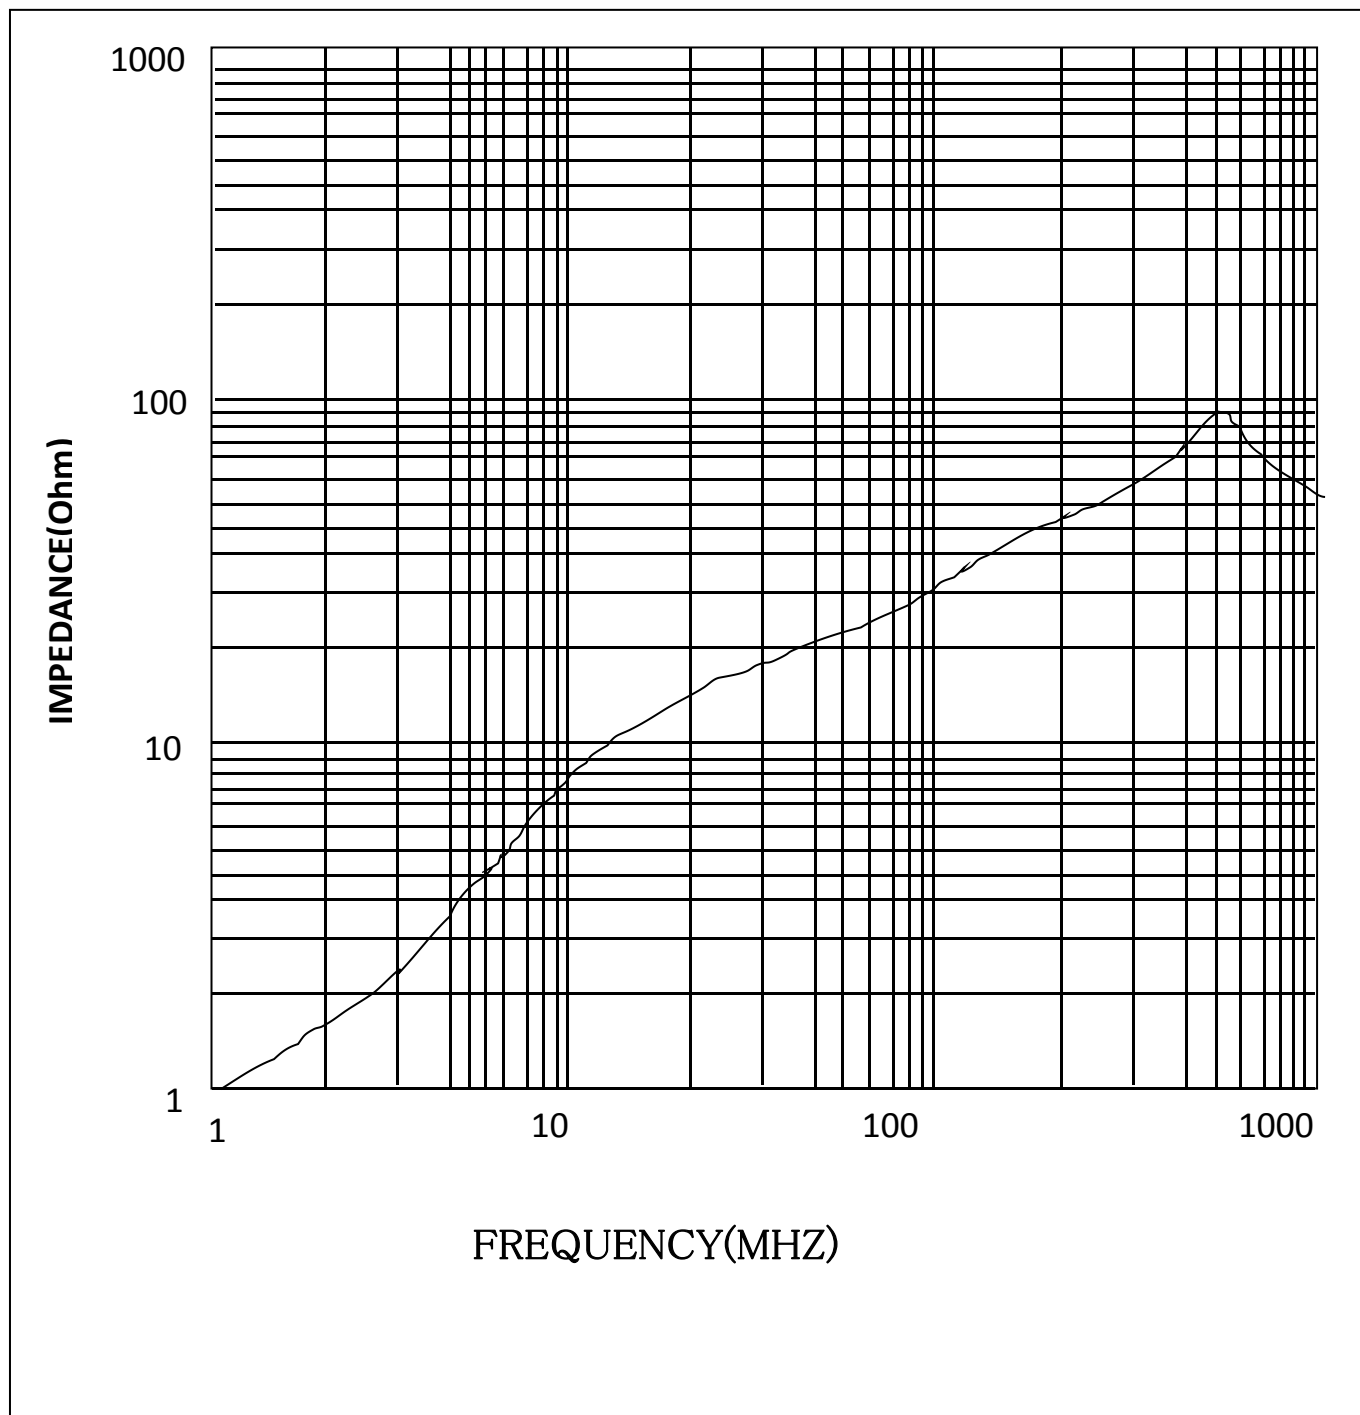

METER: HP-4191A

单击下面可查看定价，库存，交付和生命周期等信息

[>>XR\(祥如\)](#)