



产品承认书 SPECIFICATION FOR APPROVAL

客户名称:

CUSTOMER

我司料号:

OUR PART NO.

XRACM1513F-SERIES

我司品名:

OUR PART NAME

贴片共模电感

送样日期:

DATE SAMPLES

数量:

QUANTITY

制造确认 MANUFACTURER APPROVE

| 拟制 DRAWN | 审核 CHECKED | 确认 APPROVED |
|----------|------------|-------------|
| 殷瑛 | 董兰瑶 | 周俊 |

客户确认 CUSTOMER APPROVE

客户名称 CUSTOMER NAME:

客户料号 CUSTOMER P/N:

规格型号 DESCRIPTION: ACM1513F-SERIES 系列

检查结果: 合格 不合格

签名及盖章:

INSPECT RESULT ACCEPT REJECT

SIGNATURE AND STAMP

说明 REMARK:

如对本承认书内容有异议请提出或标记发送至我司, 本承认书在未收到异议回复时于本承认书提供一周后生效。

东莞市祥如电子有限公司

地址: 广东省东莞市塘厦镇莲湖第一工业区南二横路36号B栋

电话: 0769-86346548 传真: 0769-86346358

邮箱: dgxiangru@126.com





承认书/SPECIFICATION FOR APPROVAL

| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
|----------------------|----------------------------|--|-------------------|------------------|----------------|
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |
| 修改记录/MODIFY RECORDS | | | | | |
| 版别 REV. | 日期 DATE | 修改内容 MODIFY CONTENT | 拟制 DRAWING | 审核 CHECKED | 批准 APPROVED |
| 1.0.0 | 2022/9/6 | 新版发行 | 殷瑛 | 董兰瑶 | 程志华 |
| 1.0.1 | 2022/12/1 | 101-HP的Impedance由70MIN改为100MIN 100Typ改为190Typ | 殷瑛 | 董兰瑶 | 程志华 |
| 1.0.2 | 2022/12/25 | ①PE袋数量由700PCS/袋改为350PCS/袋 | 殷瑛 | 董兰瑶 | 程志华 |
| | | ②载带由W24/P16改为W24/P20 | | | |
| 1.0.3 | 2022/12/29 | 新增232 | 殷瑛 | 董兰瑶 | 程志华 |
| 1.0.4 | 2023/1/9 | 701额定电流13A Max修改为10A Max | 殷瑛 | 董兰瑶 | 程志华 |
| | | 701 DC Resistance(mΩ)由5.0 Max改为7.0Max | | | |
| 1.0.5 | 2023/1/10 | 新增101-HP曲线图 | 殷瑛 | 董兰瑶 | 程志华 |
| 1.0.6 | 2023/5/20 | 额定电压由80V改为125V 平贴度由0.12mm改为0.15mm | 殷瑛 | 董兰瑶 | 周俊 |
| 1.0.7 | 2023/6/15 | 新增302 | 殷瑛 | 董兰瑶 | 周俊 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

承认书/SPECIFICATION FOR APPROVAL

| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |

一.外观图/DIMENSION (单位/UNIT : mm)




Pad Layout

| | |
|----|-----------|
| A | 15.0 ±0.5 |
| A1 | 15.6 ±0.5 |
| B | 13.0 ±0.5 |
| C | 6.6 Max |
| D | 9.4 Typ |
| E | 2.6 Typ |
| F | 2.5 Typ |
| G | 9.5 Typ |
| H | 3.3 Typ |
| I | 16.0 Typ |
| J | 8.8 Typ |
| | |
| | |

二.注意事项/NOTE :

- 1.印字：白色5.0*2.7mm(Arial字体)
- 2.平整度：0.15mm MAX

三.电路图/CIRCUIT DIAGRAM



四.电气特性/ELECTRICAL CHARACTERISTIC

| Part Number | Impedance (Ω) @100MHz | | DC Resistance (mΩ) Max | Rated Current (A) Max | Rated Voltage (V) Max | Insulation Resistance (MΩ) Min | Marking |
|-------------------|--------------------------|------|------------------------------|--------------------------|--------------------------|--------------------------------------|---------|
| | MIN | TYP | | | | | |
| XRACM1513F-101-HP | 100 | 190 | 3.5 | 20.0 | 125 | 10 | 101 |
| XRACM1513F-301 | 225 | 300 | 5.0 | 13.0 | 125 | 10 | 301 |
| XRACM1513F-301-HP | 225 | 300 | 4.0 | 15.0 | 125 | 10 | 301 |
| XRACM1513F-501 | 400 | 500 | 6.0 | 10.0 | 125 | 10 | 501 |
| XRACM1513F-551 | 400 | 550 | 6.0 | 10.0 | 125 | 10 | 551 |
| XRACM1513F-551-HP | 400 | 550 | 5.0 | 12.0 | 125 | 10 | 551 |
| XRACM1513F-601 | 500 | 600 | 7.0 | 10.0 | 125 | 10 | 601 |
| XRACM1513F-701 | 500 | 700 | 7.0 | 10.0 | 125 | 10 | 701 |
| XRACM1513F-701-HP | 500 | 700 | 5.0 | 13.0 | 125 | 10 | 701 |
| XRACM1513F-102 | 800 | 1000 | 10.0 | 9.0 | 125 | 10 | 102 |
| XRACM1513F-152 | 1200 | 1500 | 23.0 | 5.0 | 125 | 10 | 152 |
| XRACM1513F-232 | 1800 | 2300 | 11.0 | 7.0 | 125 | 10 | 232 |
| XRACM1513F-302 | 2500 | 3000 | 75.0 | 4.0 | 125 | 10 | 302 |

- (1).Rated Current: Temp.rise 40°C Typ
- (2).Operating Temperature: -20°C up to +125°C
- (3).Storage Temperature: 15°C up to 25°C, 65% RH max.


承认书/SPECIFICATION FOR APPROVAL

| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |


五.特征曲线/CHARACTERISTICS(REFERENCE)

- 20 to +125 °C (Contain Heating coil)


XRACM1513F-101-HP

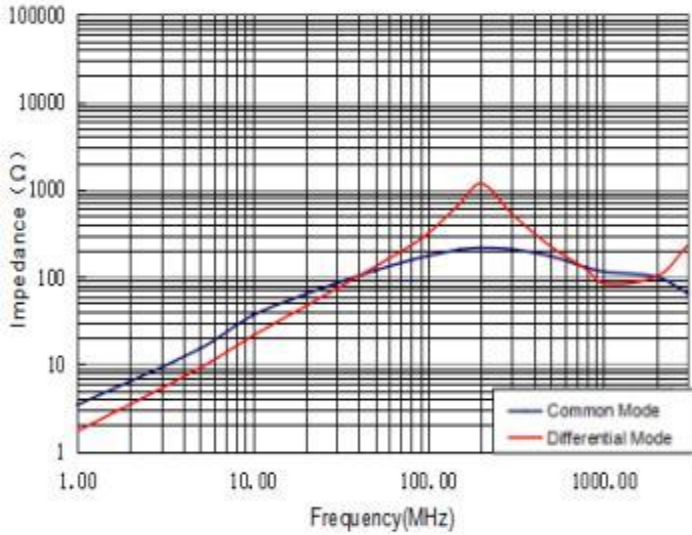


XRACM1513F-301

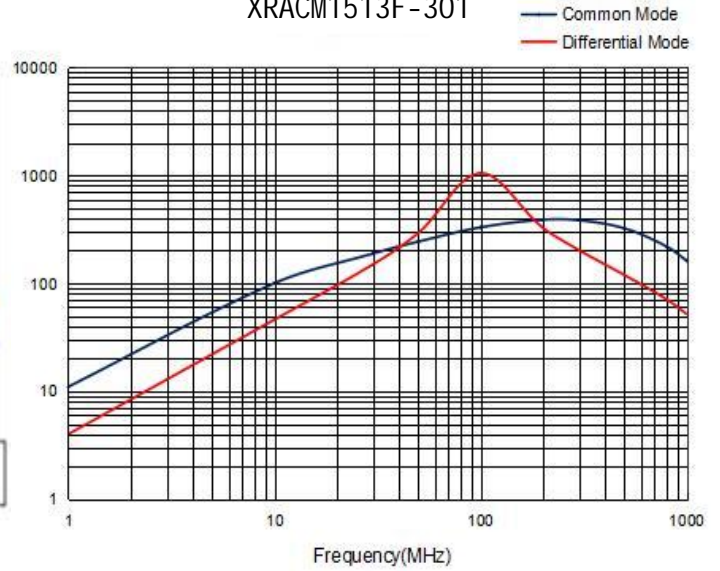

XRACM1513F-301-HP

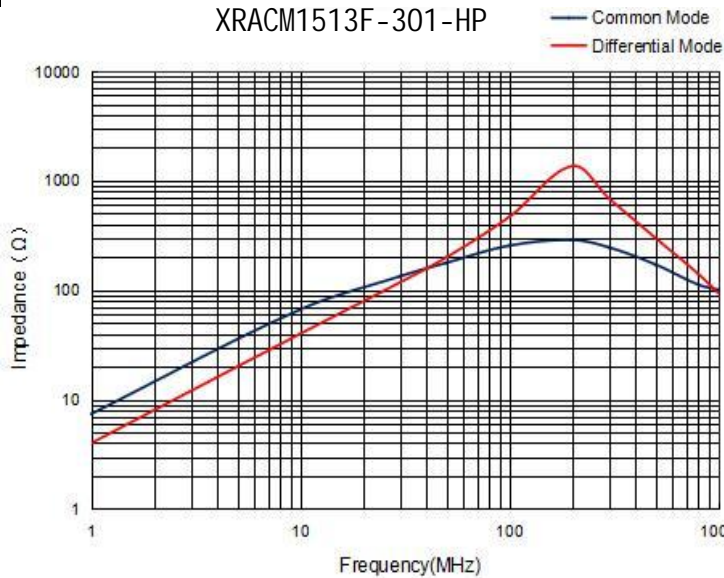


XRACM1513F-551-HP

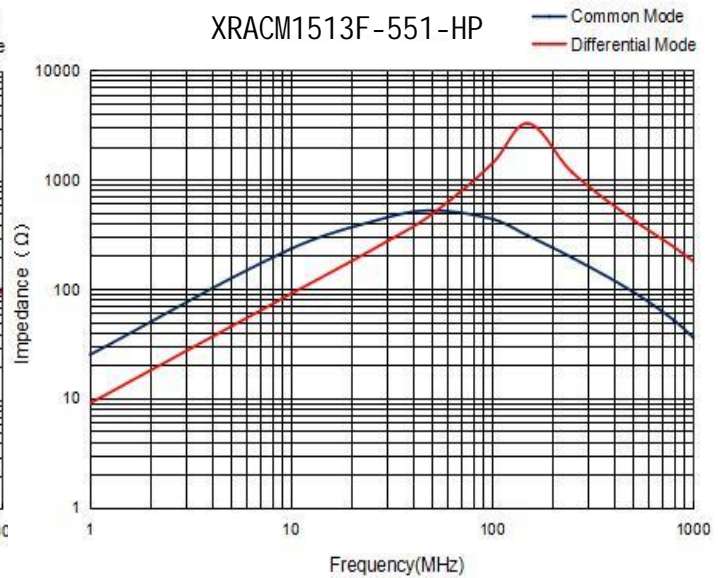


| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |

- 20 to +125 °C (Contain Heating coil)


XRACM1513F-501&551

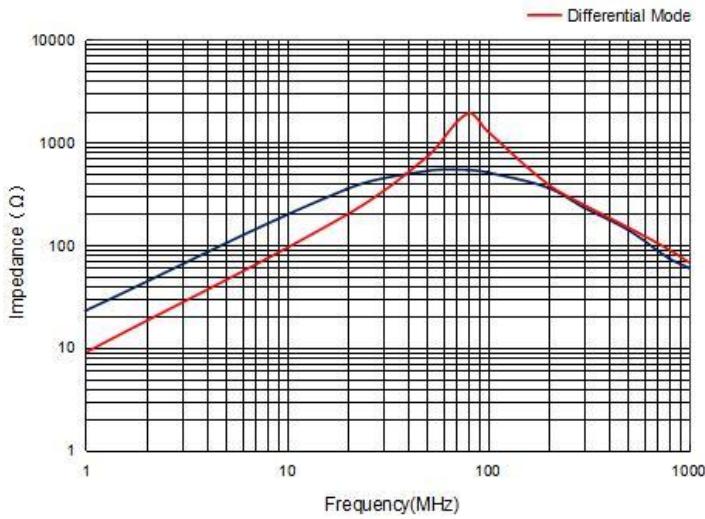

XRACM1513F-601&701

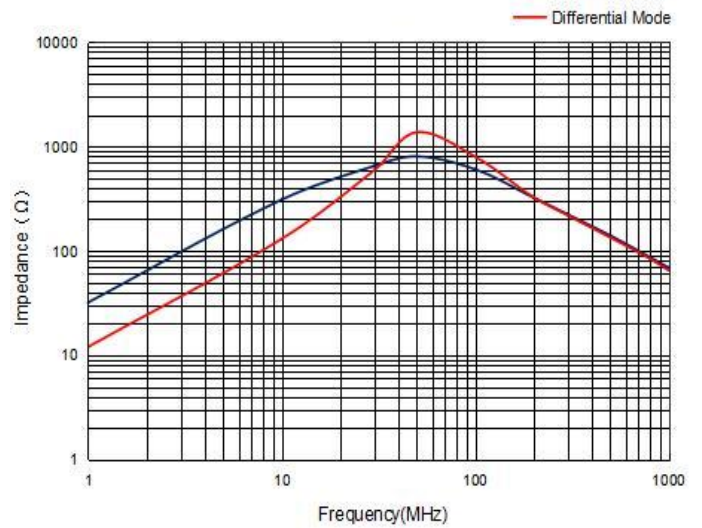

XRACM1513F-102

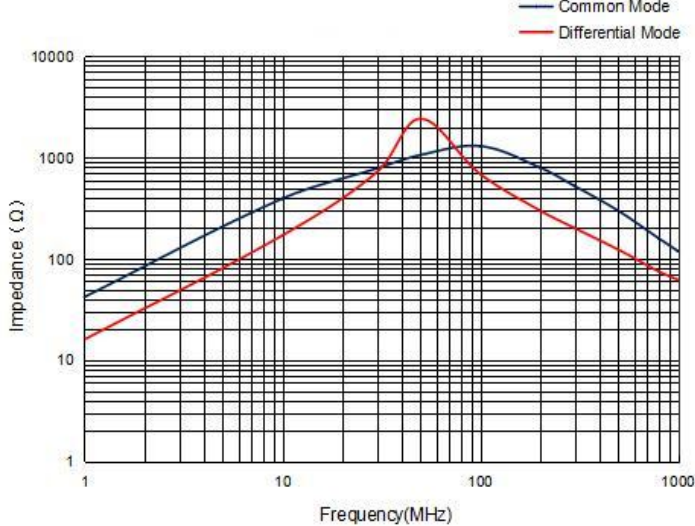


承认书/SPECIFICATION FOR APPROVAL


| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |

- 20 to +125 °C (Contain Heating coil)


XRACM1513F-152

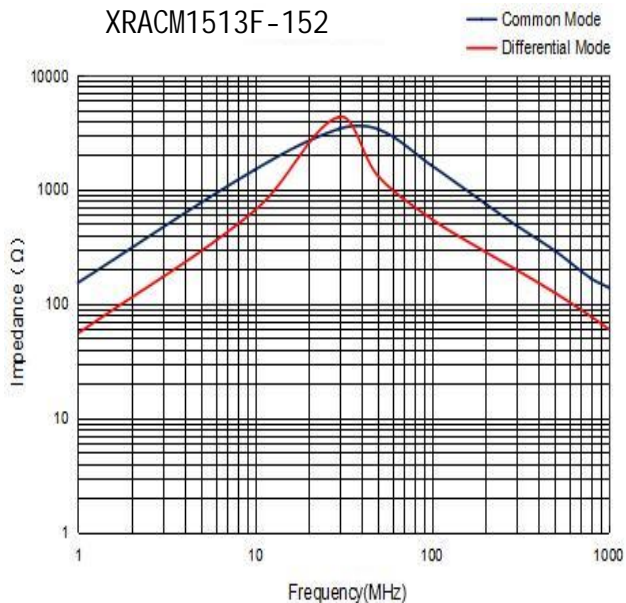

XRACM1513F-232

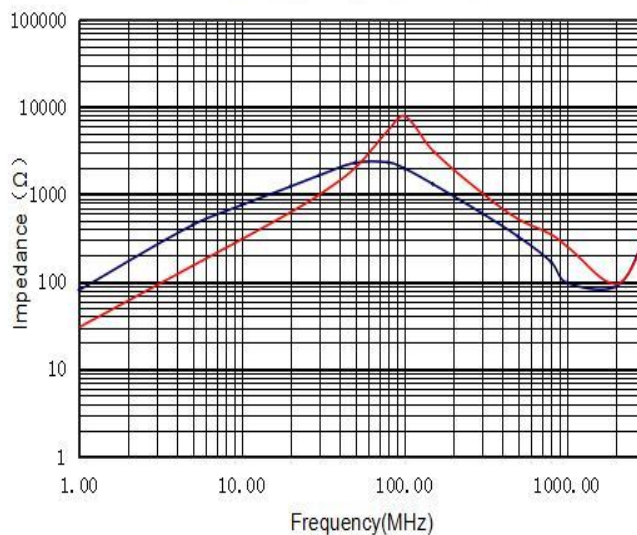

XRACM1513F-302

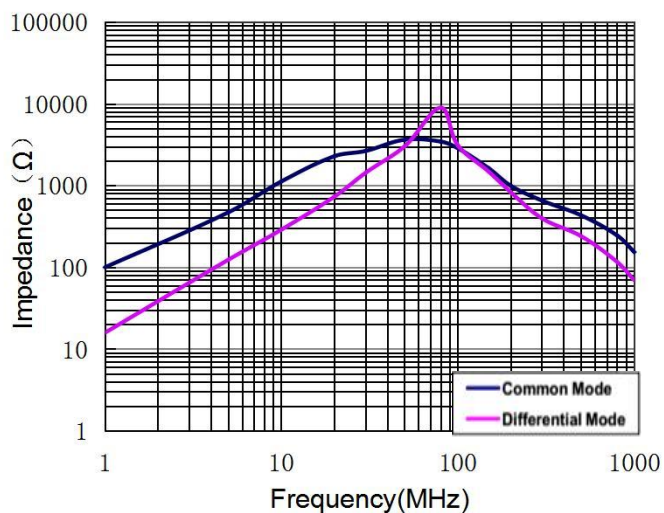


承认书/SPECIFICATION FOR APPROVAL

| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |


六.可靠性测试/RELIABILITY TESTING

| | |
|------------------------------------|--|
| Operating Temperature | - 20 to +125 °C (Contain Heating coil) |
| Appearance Inspection | No external defects by visual inspection |
| Terminal Strength | After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. (Refer to figure at right) |
| Heat endurance of reflow soldering | Refer to figure |
| Insulating resistance | Over 10 MΩ at 125V D.C . between wire and core |
| Dielectric Strength | Apply at 0.5KV 1mA for 3S between wire and core |
| Temperature characteristics | Inductance coefficient (0~2,000) × 10 / °C (- 20~ + 125 °C) |
| Humidity characteristics | Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition |



A test is made under the above mentioned condition , and it is kept for 2 hours in the normal

IR Reflow profile

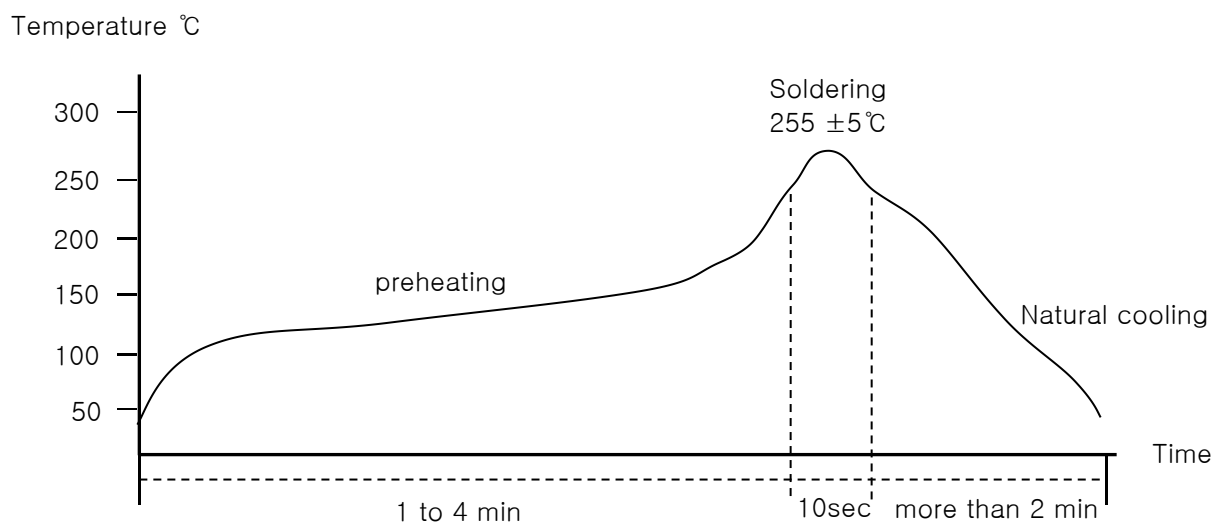

Temperature and humidity . After that , no mechanical and electrical defect should be found .



承认书/SPECIFICATION FOR APPROVAL

| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 XR P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |


七.材料清单/MATERIAL LIST

| NO. | ITEM | DESCRIPTION |
|-----|----------|-------------|
| 1 | CORE | FERRITE |
| 2 | CLIP | C1100 P2 |
| 3 | COVER | LCP |
| 4 | WIRE | P180 Grd1 |
| 5 | SOLDER | 107H |
| 6 | ADHESIVE | EPOXY RESIN |
| 7 | INK | WHITE |

八.包装规格/PACKING SPECIFICATIONS

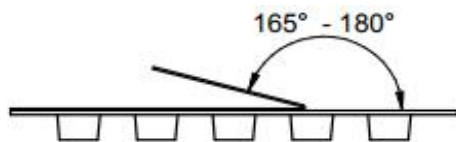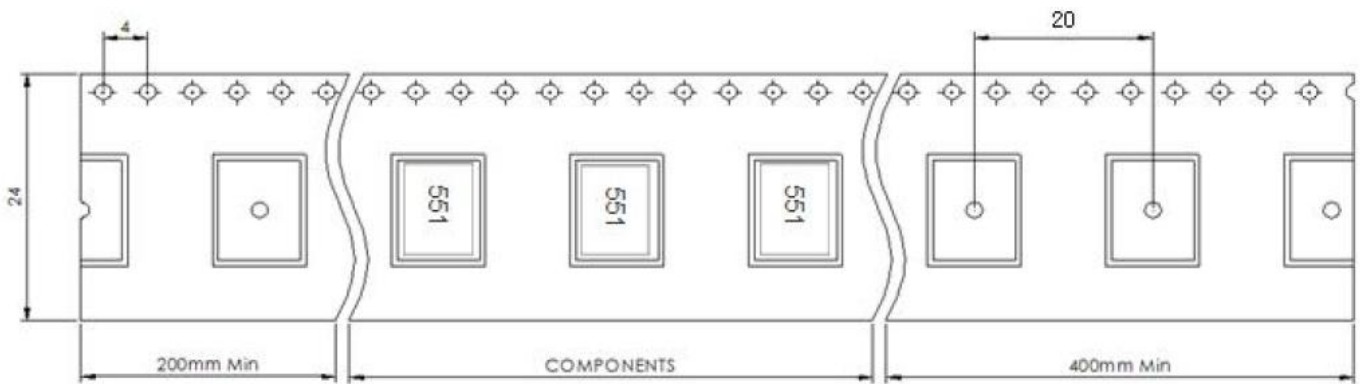

| Tape width | Distance | Pull-of force |
|------------|----------|---------------|
| 24 mm | 16 mm | 10~120g |

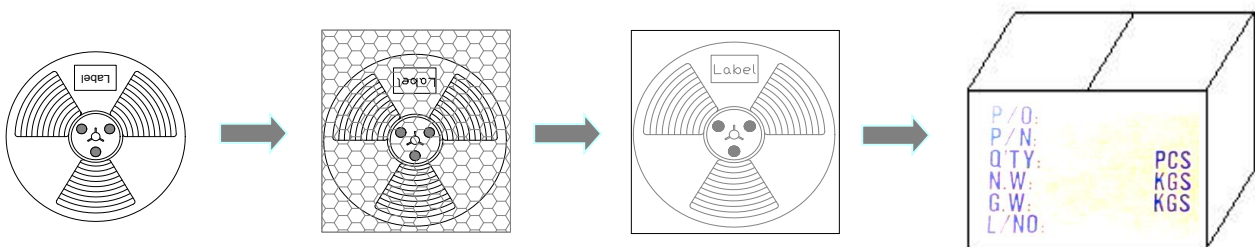

轮盘：13'(直径330mm)
数量：350PCS/盘

PE袋
数量：350PCS/袋

内盒
数量：700PCS/盒

外箱，数量：3500PCS/箱
不足整箱用内盒或填充物
装满

承认书/SPECIFICATION FOR APPROVAL

| | | | | | |
|----------------------|----------------------------|----------------------|-------------------|------------------|------------|
| 客户名称 CUSTOMER | ----- | 客户品名 CUSTOMER P/N | ----- | 版别 REV. | 1.0.7 |
| 产品类型 PRODUCT TYPE | Common Mode Line Filter | 祥如品名 祥如 P/N | XRACM1513F-SERIES | 文件编号 FILE NO. | SP22090603 |

Cautions and Warnings



提醒及警告

1. When the products are used in occasions other than general electronic equipment, such as vehicle mounted, medical equipment, military, aerospace, etc., please be sure to contact the company's business department. In case of machine failure caused by exceeding the recommended use range of the company's products, the company will not bear relevant responsibilities (此系列產品推荐使用范围：影音, 家電, 辦公自動化, 通訊, 電源模塊, LED照明, 測量設備, 機械工具等一般電子設備中.)

2. when the company's products are used outside the general electronic equipment, such as vehicle mounted, medical, military, aviation, aerospace and other environments, please contact the company's business department and put forward a request. Otherwise, the company will not bear any relevant responsibility for the machine failure caused by the use beyond the scope recommended by the company

(當本公司產品使用在一般電子設備以外, 如: 車載, 醫療, 軍用, 航空, 航天等环境时, 請必須聯繫本公司營業部門并提出述求, 否則超出本公司推薦的使用范围而引起的機器故障, 本公司不承擔任何相關責任.)

3. Please pay attention to the storage conditions that temperature: below 15-25°C and humidity: 65% RH Max. If product is preserved for more than 6 months, the solderability of their terminals may be deteriorated.

(產品在規定的溫度和濕度條件下保存: 溫度: 15-25°C 以下, 濕度上限: 65% RH, 如果保存期超過半年, 端子的可焊性可能會變差.)

单击下面可查看定价，库存，交付和生命周期等信息

[>>XR\(祥如\)](#)