



东莞市祥如电子有限公司

产品规格书

客户名称 :

材质 : **HCM1**

图号 :

品名 : **XRRH4*10*2**

日期 : **2022/9/10**

贵公司确认


承认

暂时承认, 修改如下

不承认, 原因如下

-意-见


备注 : 混品如无问题, 烦请贵司承认后尽快将承认书回传我司!
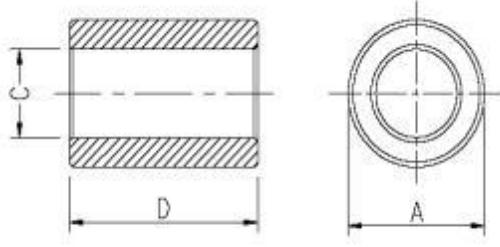
| 详述 | | | 符合 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-----------|-----------|------------|----|---------|----|----|------|--------|-----------|--|--|---|---------|-----------|---|-------|------|---|--|--|---|--|--|---|--|--|----|----|----|---|--|--|
| 客户 | | 表号 | 3 (1) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 品名 | 抗EMI铁氧体磁芯 | 样品名称 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 批号 | | | XRRH4*10*2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 产品标识 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| XRRH 4 * 10 * 2 1 2 3 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  (1) 型号 (2) 外径 (3) 高度 (4) 内径 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 尺寸 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | | 配置 | 产品图片 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th>序号</th><th>尺寸 (mm)</th><th></th></tr> </thead> <tbody> <tr> <td>A</td><td>4.00</td><td>±0.2</td></tr> <tr> <td>B</td><td></td><td></td></tr> <tr> <td>C</td><td>2.00</td><td>±0.15</td></tr> <tr> <td>D</td><td>10.00</td><td>±0.3</td></tr> <tr> <td>E</td><td></td><td></td></tr> <tr> <td>F</td><td></td><td></td></tr> <tr> <td>G</td><td></td><td></td></tr> <tr> <td>H</td><td></td><td></td></tr> <tr> <td>I</td><td></td><td></td></tr> </tbody> </table> | | | | 序号 | 尺寸 (mm) | | A | 4.00 | ±0.2 | B | | | C | 2.00 | ±0.15 | D | 10.00 | ±0.3 | E | | | F | | | G | | | H | | | I | | |
| 序号 | 尺寸 (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | 4.00 | ±0.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | 2.00 | ±0.15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 10.00 | ±0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| I | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3. 电气性能测试指标 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th rowspan="2">No.</th><th colspan="2">特点</th><th rowspan="2"></th><th rowspan="2"></th></tr> <tr> <th>频率</th><th>阻抗</th></tr> </thead> <tbody> <tr> <td>1</td><td>25 MHz</td><td>25 Ω Min.</td><td></td><td></td></tr> <tr> <td>2</td><td>100 MHz</td><td>70 Ω Min.</td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td></tr> <tr> <td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table> | No. | 特点 | | | | 频率 | 阻抗 | 1 | 25 MHz | 25 Ω Min. | | | 2 | 100 MHz | 70 Ω Min. | | | | | | | | | | | | | 测试 | 审核 | 批准 | | | |
| No. | | 特点 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 频率 | 阻抗 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 25 MHz | 25 Ω Min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 100 MHz | 70 Ω Min. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 向瑛 | 李平 | 刘恩刚 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| 详述 | | | | | 符合 | | | |
|----|--|-----------|------|------------|----|--|--|--|
| 客户 | | | 表号 | 3 (2) | | | | |
| | | | | | | | | |
| 品名 | | 抗EMI铁氧体磁芯 | 样品名称 | XRRH4*10*2 | | | | |
| 批号 | | | | | | | | |

8 阻抗与频率的特性曲线

| Z (Ω) | Freq. (MHz) | 1 | 5 | 10 | 25 | 50 | 100 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 |
|-------|-------------|---|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| 0 | | 4 | 11 | 23 | 35 | 58 | 95 | 144 | 218 | 345 | 567 | 601 | 300 | 189 | 143 | 103 | 93 | 79 |

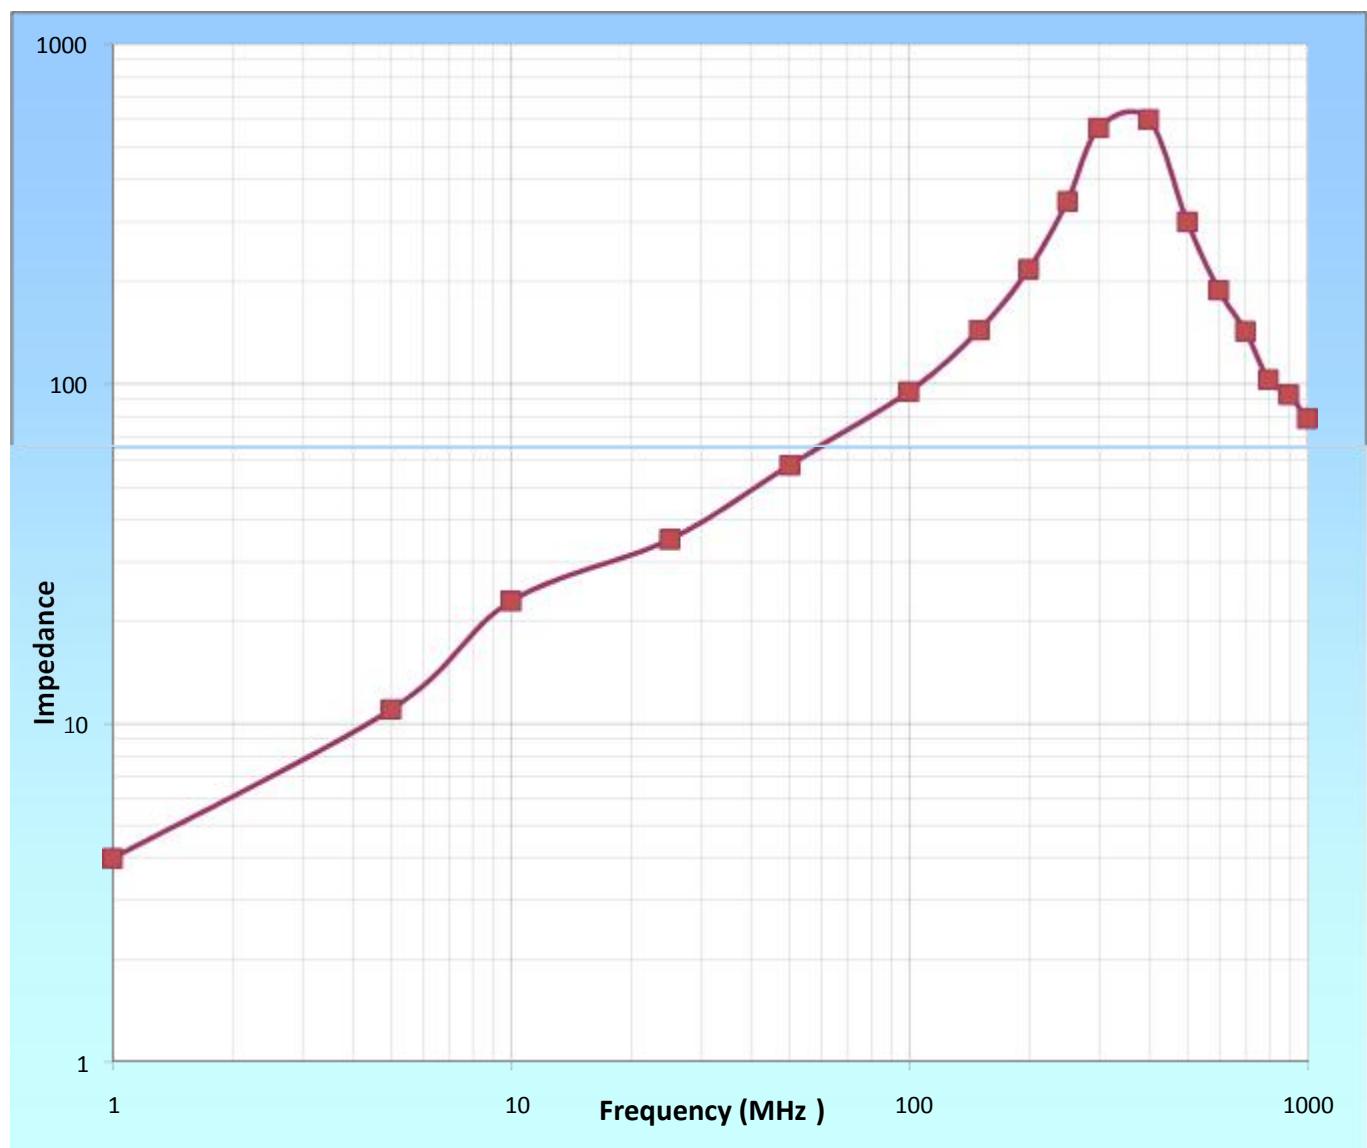

| | 测试 | 审核 | 批准 |
|--|----|----|-----|
| | 向瑛 | 李平 | 刘恩刚 |
| | | | |

| 详述 | | | 符合 |
|----|-----------|------|------------|
| 客户 | | 表号 | 3 (3) |
| 品名 | 抗EMI铁氧体磁芯 | 样品名称 | XRRH4*10*2 |
| 批号 | | | |

9检测条件

检测仪器 : HP-4191A阻抗分析仪

测试条件 : Ø 0.65mm*120mm*0.5TS

温度 : 25° C 湿度 : 60%

| 1 | 电阻抗(Ω) | | | 尺寸 | | |
|----------|------------|------------|--|--------------|---------------|---------------|
| 配置 | 在 25MHz | 在100MHz | | 外径 (A) | 内径 (C) | 高度 (D) |
| 规格 | 25Ω Min | 70Ω Min | | 4.00 ±0.2 | 2.00 ±0.15 | 10.00 ±0.3 |
| 1 | 38.76 | 95.51 | | 3.91 | 2.08 | 9.77 |
| 2 | 39.41 | 94.16 | | 3.89 | 2.10 | 9.89 |
| 3 | 41.71 | 94.61 | | 3.94 | 2.08 | 9.86 |
| 4 | 37.15 | 93.28 | | 3.91 | 2.07 | 9.70 |
| 5 | 40.46 | 94.57 | | 3.84 | 2.03 | 9.72 |
| 6 | 41.48 | 93.75 | | 3.87 | 2.04 | 9.74 |
| 7 | 39.90 | 95.28 | | 3.89 | 2.07 | 9.76 |
| 8 | 38.56 | 93.96 | | 3.95 | 2.11 | 9.79 |
| 9 | 37.76 | 94.47 | | 3.92 | 2.09 | 9.89 |
| 10 | 39.96 | 95.43 | | 3.88 | 2.07 | 9.75 |
| <u>X</u> | 39.52 | 94.50 | | 3.90 | 2.07 | 9.79 |
| R | 4.6 | 2.2 | | 0.11 | 0.08 | 0.19 |

备注

| | 测试 | 审核 | 批准 |
|--|----|----|-----|
| | | | |
| | 向瑛 | 李平 | 刘恩刚 |

单击下面可查看定价, 库存, 交付和生命周期等信息

[>>XR\(祥如\)](#)