

# Surface Mount Aluminum Electrolytic


# CB [ For General ]




## FEATURE

For General Purposes Series with 105°C 1000 Hours  
 Suitable for AV (TV, Video, Audio) Monitor / Computer,  
 OA / HA / Communication

## MARKING

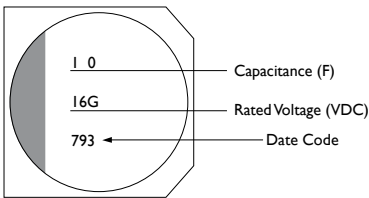

## DIMENSIONS

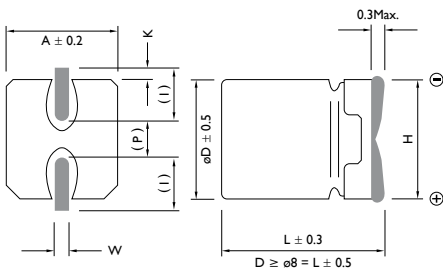

( ) Reference Size

## ELECTRICAL CHARACTERISTICS

Operation Temperature Range	-40 to +105°C									
Rated Voltage Range	4 to 100VDC									
Rated Capacitance Range	0.1 ~ 1000µF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current (Max. 20°C)	I ≤ 0.01 CV (µA) or 3µA Whichever is greater. (After 2 Minutes Application of DC Rated Working Voltage at 20°C)									
Low Temperature Stability	Impedance Ratio at 120Hz									
	WV (V)	4	6.3	10	16	25	35	50	63	100
	Z (-25°C) / Z (+20°C)	7	4	3	2	2	2	2	2	2
	Z (-40°C) / Z (+20°C)	15	8	6	4	4	3	3	3	3
Endurance	After 1000 hours application of WV at 105°C, the capacitors shall meet following requirements. (a) Capacitance Change: Within ±20% of the Initial Value (b) Dissipation Factor: Not Exceeding 200% of Specified Value (c) Leakage Current: Not Exceeding the Specified Value									
Shelf Life	After having been placed at 105°C without voltage applied for 1000 hours, the capacitors shall meet the same requirements as Endurance.									

Unit: mm

SIZE CODE	Dø	L	A	H	I	W	P	K
B	4.0	5.4	4.3	5.5 Max.	1.8	0.65 ± 0.1	1.0 ± 0.2	0.35 <sup>+ 0.15</sup> <sub>- 0.20</sub>
C	5.0	5.4	5.3	6.5 Max.	2.2	0.65 ± 0.1	1.5 ± 0.2	0.35 <sup>+ 0.15</sup> <sub>- 0.20</sub>
D	6.3	5.4	6.6	7.8 Max.	2.6	0.65 ± 0.1	1.8 ± 0.2	0.35 <sup>+ 0.15</sup> <sub>- 0.20</sub>
E	8.0	6.5	8.3	9.5 Max.	3.4	0.65 ± 0.1	2.2 ± 0.2	0.35 <sup>+ 0.15</sup> <sub>- 0.20</sub>
F	8.0	10.5	8.3	10.0 Max.	3.4	0.90 ± 0.2	3.1 ± 0.2	0.70 ± 0.20
G	10.0	10.5	10.3	12.0 Max.	3.5	0.90 ± 0.2	4.6 ± 0.2	0.70 ± 0.20
H	6.3	7.7	6.6	7.8 Max.	2.6	0.65 ± 0.1	1.8 ± 0.2	0.35 <sup>+ 0.15</sup> <sub>- 0.20</sub>

## CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

D x L: mm

### CAP. RATED VOLTAGE WV (SURGE VOLTAGE WV)

(μF)	4 (5)			6.3 (8)			10 (13)			16 (20)		
	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR
4.7										4 x 5.4	20	0.16
10							4 x 5.4	24	0.30	4 x 5.4	28	0.16
22	4 x 5.4	20	0.35	4 x 5.4	29	0.30	4 x 5.4	36	0.30	5 x 5.4	39	0.16
33	4 x 5.4	26	0.35	4 x 5.4	43	0.30	4 x 5.4	45	0.30	6.3 x 5.4	65	0.20
47	4 x 5.4	34	0.35	5 x 5.4	46	0.30	5 x 5.4	55	0.30	6.3 x 5.4	70	0.20
							6.3 x 5.4	70	0.30	6.3 x 7.7	125	0.20
100	5 x 5.4	61	0.35	5 x 5.4	58	0.35	8 x 6.5	110	0.30	6.3 x 5.4	100	0.20
				6.3 x 5.4	71	0.35			6.3 x 7.7	98	0.20	
								8 x 6.5	130	0.20		
220	6.3 x 5.4	82	0.35	6.3 x 5.4	95	0.35	6.3 x 7.7	115	0.30	6.3 x 7.7	100	0.20
				6.3 x 7.7	120	0.35	8 x 10.5	160	0.26	10 x 10.5	210	0.20
				8 x 6.5	130	0.35						
330				6.3 x 7.7	175	0.35	10 x 10.5	230	0.26	10 x 10.5	230	0.20
				8 x 10.5	230	0.35						
470				10 x 10.5	260	0.35	10 x 10.5	270	0.26	8 x 10.5	230	0.20
									10 x 10.5	275	0.20	
1000				10 x 10.5	380	0.35	10 x 10.5	390	0.26			

Note: 1. Ripple Current: (mA/rms) 105°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz



## CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

D x L: mm

CAP. (μF)	RATED VOLTAGE WV (SURGE VOLTAGE WV)								
	25 (32)			35 (44)			50 (63)		
	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR	SIZE	RIPPLE CURRENT	DISSIPATION FACTOR
0.10							4 x 5.4	1	0.12
0.22							4 x 5.4	2	0.12
0.33							4 x 5.4	3	0.12
0.47							4 x 5.4	5	0.12
1.0							4 x 5.4	10	0.12
2.2				4 x 5.4	15	0.12	4 x 5.4	16	0.12
3.3				4 x 5.4	18	0.12	4 x 5.4	16	0.12
4.7	4 x 5.4	22	0.14	4 x 5.4	22	0.12	5 x 5.4	23	0.12
10	4 x 5.4	23	0.14	5 x 5.4	30	0.12	6.3 x 5.4	35	0.12
	5 x 5.4	28	0.14						
22	5 x 5.4	45	0.14	6.3 x 5.4	60	0.14	6.3 x 7.7	65	0.12
	6.3 x 5.4	55	0.14				8 x 6.5	70	0.12
33	6.3 x 5.4	65	0.16	8 x 6.5	84	0.14	6.3 x 7.7	70	0.12
							8 x 10.5	91	0.12
47	6.3 x 5.4	65	0.16	6.3 x 7.7	72	0.14	6.3 x 7.7	65	0.12
	8 x 6.5	91	0.16	8 x 6.5	76	0.14	10 x 10.5	100	0.12
				8 x 10.5	98	0.14			
100	6.3 x 7.7	95	0.16	6.3 x 7.7	105	0.14	8 x 10.5	120	0.12
	8 x 6.5	100	0.16	8 x 10.5	130	0.14	10 x 10.5	145	0.12
	8 x 10.5	130	0.16	10 x 10.5	160	0.14			
220	8 x 10.5	220	0.16	10 x 10.5	240	0.14			
	10 x 10.5	273	0.16						
330									
470	10 x 10.5	570	0.16						

Note: 1. Ripple Current: (mA/rms) 105°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz

**CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS**

D x L: mm

CAP. ( $\mu$ F)	RATED VOLTAGE WV (SURGE VOLTAGE WV)					
	63 (79) SIZE			100 (125) SIZE		
		RIPPLE CURRENT	DISSIPATION FACTOR		RIPPLE CURRENT	DISSIPATION FACTOR
3.3				8 x 10.5	30	0.18
4.7	6.3 x 5.4	20	0.18	8 x 10.5	50	0.18
10	6.3 x 5.4	20	0.18	8 x 10.5	55	0.18
22	8 x 10.5	30	0.18	10 x 10.5	60	0.18
33	8 x 10.5	30	0.18	10 x 10.5	65	0.18
47	8 x 10.5	30	0.18			
100	10 x 10.5	60	0.18			

Note: 1. Ripple Current: (mA/rms) 105°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz

单击下面可查看定价，库存，交付和生命周期等信息

[>>Yageo\(国巨\)](#)