

# DATA SHEET

## MOLDED RESISTORS

Power, Surface mount


MWP Series

$\pm 1\%$ ,  $\pm 5\%$

1W to 5W

RoHS compliant & Halogen Free





**ORDERING INFORMATION**

Part number of the molded resistor is identified by the series, power rating, tolerance, packing, temperature coefficient and resistance value.

**PART NUMBER**

<u>MWP</u>	<u>5WS</u>	<u>J</u>	<u>R</u>	<u>-</u>	<u>100R</u>
(1)	(2)	(3)	(4)	(5)	(6)

**APPLICATIONS**

- Industrial
- Consumer & Electronics
- Power and Energy

**FEATURES**

- Suitable for automatic pick and place
- All welded construction
- Small package size
- Molded encapsulation
- RoHS compliant & halogen free

**(1) SERIES NAME**

MWP Series

**(2) POWER RATING**

100 = 1W	3WS= 3W
2WS = 2W	300 = 3W
200= 2W	5WS = 5W

**(3) TOLERANCE**

F= ±1%	J = ±5%
--------	---------

**(4) PACKAGING**

R =Reel Pack


**(5) TEMPERATURE COEFFICIENT OF RESISTANCE**

F=±100ppm/°C	- = Based on spec.
--------------	--------------------

**(6) RESISTANCE VALUE**



E24 & E96 Series  
 Example:  
 0R1 = 0.1Ω, 100R = 100Ω, 1K = 1,000Ω.....

**DIMENSIONS**

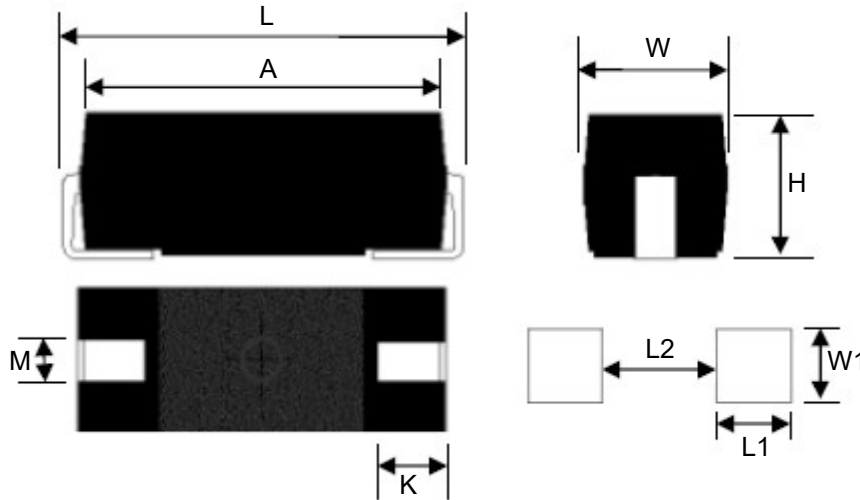

TYPE			DIMENSIONS								Unit: mm	
Normal	Miniature	Size	L Max.	A	W	H	M	K	W1 Min.	L1 Min.	L2	
MWP100	MWP2WS	2616	7.9	6.8±0.3	4.2±0.3	3.55±0.3	1.4±0.3	1.5±0.3	2.8	3	4±0.3	
MWP200	MWP3WS	4525	13	11.5±0.3	6.35±0.3	5.0±0.3	1.7±0.3	2.3±0.3	3	3.5	7±0.3	
MWP300	MWP5WS	5027	17	12.7±0.3	7.0±0.3	6.8±0.3	1.7±0.3	2.5±0.3	3	3.8	8.2±0.3	

**DERATING CURVE**

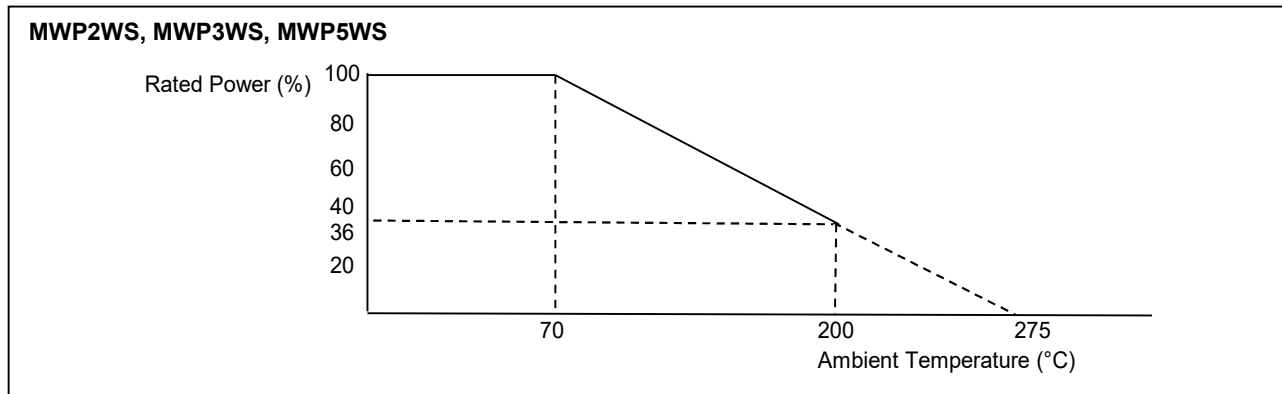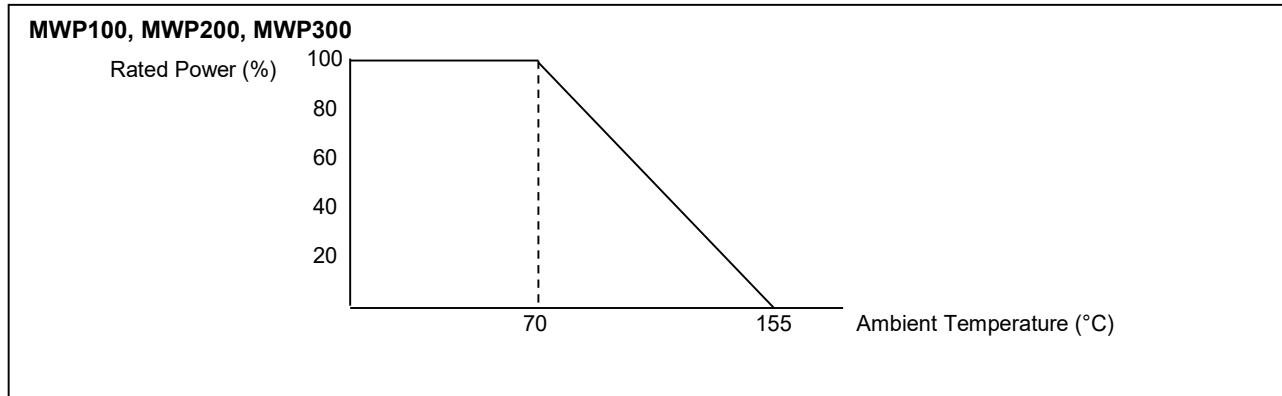

**ELECTRICAL CHARACTERISTICS**

CHARACTERISTICS	MWP100	MWP200	MWP300
Power Rating at 70 °C	1W	2W	3W
Maximum Working Voltage	300V	500V	500V
Maximum Overload Voltage	600V	700V	700V
Voltage Proof on Insulation	500V	700V	1000V
Resistance Range (Film)	1Ω ~ 1MΩ	1Ω ~ 1MΩ	1Ω ~ 1MΩ
Operating Temp. Range	- 55°C to +155°C		
Temperature Coefficient	±100ppm/°C, ±300ppm/°C		

Note: For resistance value out of above range is by request.

CHARACTERISTICS	MWP2WS	MWP3WS	MWP5WS
Power Rating at 70 °C	2W	3W	5W
Voltage Proof on Insulation	500V	700V	1000V
Resistance Range (Wirewound)	0.1Ω ~ 150Ω	0.1Ω ~ 750Ω	0.1Ω ~ 1.8KΩ
Maximum Working Voltage	$\sqrt{(P \times R)}$		
Operating Temp. Range	- 55°C to +200°C		
Temperature Coefficient	±100ppm/°C, ±300ppm/°C		

Note: For resistance value out of above range is by request.

**TEST AND REQUIREMENTS**

TEST	TEST METHOD	PROCEDURE	APPRAISE
Short Time Overload	IEC 60115-1 4.13	5 times rated power for 5 sec.	±0.5%+0.05Ω
Voltage Proof on Insulation	IEC 60115-1 4.7	In V-Block for 60 sec. test voltage as above table	No Breakdown
Temperature Coefficient	IEC 60115-1 4.8	Between -55°C to +155°C	By Type
Insulation Resistance	IEC 60115-1 4.6	In V-Block for 60 sec.	>1,000MΩ
Solderability	IEC 60115-1 4.17	245±5°C for 3±0.5 Sec.	95% Min. coverage
Resistance to Soldering Heat	IEC 60115-1 4.18	260±3°C for 10±1 Sec.	±1.0%+0.05Ω
Damp Heat Steady State	IEC 60115-1 4.24	40±2°C,90-95% RH for 56 days, loaded with 0.1 times RCWV	±1.0%+0.05Ω
Endurance at 70°C	IEC 60115-1 4.25	70±2°C at RCWV(or Umax., whichever less) for 1,000 Hr.(1.5 Hr.on,0.5 Hr. off)	±1.0%+0.05Ω

Note:

**RCWV (Rated Continuous Working Voltage):**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

or max. working voltage whichever is less


Where

V=Continuous rated DC or AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value ( $\Omega$ )

**PACKING METHODS**

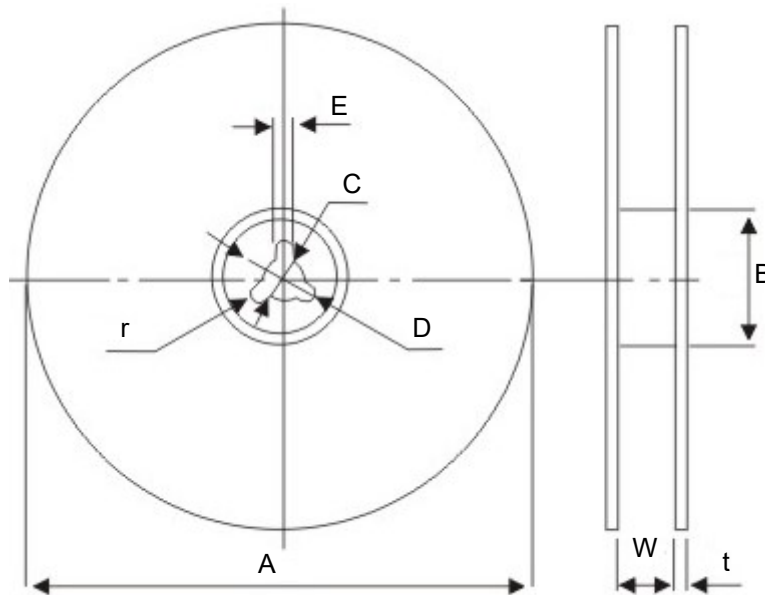

TYPE		Unit: mm/piece								
Normal	Miniature	A	B	C	D	E	W	t	r	Quantity Per Reel
MWP100	MWP2WS	330±5	Ψ100	13±0.5	23±1	2.0±0.5	17.0±1.5	2.0±0.5	R1.0	2,000
MWP200	MWP3WS	330±5	Ψ100	13±0.5	23±1	2.0±0.5	25.0±1.5	2.0±0.5	R1.0	1,000
MWP300	MWP5WS	330±5	Ψ100	13±0.5	23±1	2.0±0.5	32.0±1.5	2.0±0.5	R1.0	500

**MARKING****Example:**

---

YAGEO	= Brand
5W	= Power rating
10R	= Resistance
J	= Tolerance

---

**REVISION HISTORY**

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 0	Aug. 11, 2021	-	- First issue of this specification
Version 1	Mar. 24, 2022	-	- Revised the package quantity of MWP300 / MWP5WS
Version 2	May 10, 2022	-	- Revised Operating Temp. Range and derating curve
Version 3	Jul. 18, 2023	-	- Resistance to soldering heat test is included.

*“ Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itse If are unchanged. Any product change will be announced by PCN.”*

## **LEGAL DISCLAIMER**

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly YAGEO Corporation and its affiliates do not recommend the use of commercial, automotive, and/or COTS grade products for high reliability applications or manned space flight.

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.



单击下面可查看定价，库存，交付和生命周期等信息

[>>Yageo\(国巨\)](#)