

Surface Mount Aluminum Electrolytic


CA [For General]




FEATURE

For General Purpose Series with 85°C 2000 Hours
 Suitable for AV (TV, Video, Audio) Monitor / Computer,
 Home appliance, OA / HA / Communication

MARKING

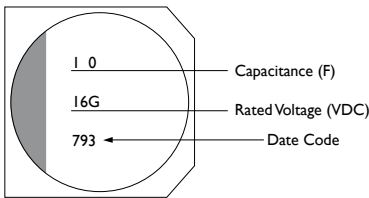

DIMENSIONS

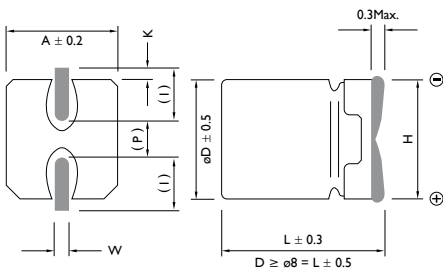

() Reference Size

ELECTRICAL CHARACTERISTICS

| | | | | | | | | | | |
|-----------------------------|---|----|-----|----|----|----|----|----|----|-----|
| Operation Temperature Range | -40 to +85°C | | | | | | | | | |
| Rated Voltage Range | 4 to 100VDC | | | | | | | | | |
| Rated Capacitance Range | 0.1 ~ 1000µF | | | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | | | |
| Leakage Current (Max. 20°C) | $I \leq 0.01CV$ (µA) or 3µA whichever is greater: (After 2 Minutes Application of DC Rated Voltage at 20°C) I = Leakage Current (µA), C = Rated Capacitance (µF), V = Rated Voltage (V) | | | | | | | | | |
| Low Temperature Stability | Impedance Ratio at 120Hz (Max.) | | | | | | | | | |
| | WV (V) | 4 | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
| | Z (-25°C) | 7 | 4 | 3 | 2 | 2 | 2 | 2 | 2 | 3 |
| | Z (-40°C) | 15 | 8 | 6 | 4 | 4 | 3 | 3 | 3 | 2 |
| Endurance | After the rated voltage has been applied at 85°C for 2000 hours, the capacitors shall meet the following requirements. (a) Capacitance Change: Within ±20% of the Initial Value (b) Dissipation Factor: Not Exceeding 200% of Specified Value (c) Leakage Current: Not Exceeding the Specified Value | | | | | | | | | |
| Shelf Life | After having been placed at 85°C without voltage applied for 1000 hours, the capacitors shall meet the same requirements as Endurance. | | | | | | | | | |

Unit: mm

| SIZE CODE | Dø | L | A | H | I | W | P | K |
|-----------|------|------|------|-----------|-----|------------|---------|--|
| B | 4.0 | 5.4 | 4.3 | 5.5 Max. | 1.8 | 0.65 ± 0.1 | 1.0±0.2 | 0.35 ^{+ 0.15} _{- 0.20} |
| C | 5.0 | 5.4 | 5.3 | 6.5 Max. | 2.2 | 0.65 ± 0.1 | 1.5±0.2 | 0.35 ^{+ 0.15} _{- 0.20} |
| D | 6.3 | 5.4 | 6.6 | 7.8 Max. | 2.6 | 0.65 ± 0.1 | 1.8±0.2 | 0.35 ^{+ 0.15} _{- 0.20} |
| E | 8.0 | 6.5 | 8.3 | 9.5 Max. | 3.4 | 0.65 ± 0.1 | 2.2±0.2 | 0.35 ^{+ 0.15} _{- 0.20} |
| F | 8.0 | 10.5 | 8.3 | 10.0 Max. | 3.4 | 0.90 ± 0.2 | 3.1±0.2 | 0.70 ± 0.20 |
| G | 10.0 | 10.5 | 10.3 | 12.0 Max. | 3.5 | 0.90 ± 0.2 | 4.6±0.2 | 0.70 ± 0.20 |
| H | 6.3 | 7.7 | 6.6 | 7.8 Max. | 2.6 | 0.65 ± 0.1 | 1.8±0.2 | 0.35 ^{+ 0.15} _{- 0.20} |

CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

D x L: mm

CAP. RATED VOLTAGE WV (SURGE VOLTAGE WV)

| (μF) | 4 (5) | | | 6.3 (8) | | | 10 (13) | | | 16 (20) | | |
|------|-----------|----------------|--------------------|-----------|----------------|--------------------|-----------|----------------|--------------------|-----------|----------------|--------------------|
| | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR |
| 4.7 | | | | | | | | | | 4 x 5.4 | 20 | 0.16 |
| 10 | | | | | | | 4 x 5.4 | 14 | 0.30 | 4 x 5.4 | 28 | 0.16 |
| 22 | 4 x 5.4 | 19 | 0.35 | 4 x 5.4 | 20 | 0.26 | 4 x 5.4 | 28 | 0.30 | 4 x 5.4 | 27 | 0.26 |
| | | | | | | | | | | 5 x 5.4 | 39 | 0.16 |
| 33 | 4 x 5.4 | 26 | 0.35 | 5 x 5.4 | 22 | 0.26 | 4 x 5.4 | 29 | 0.30 | 5 x 5.4 | 45 | 0.26 |
| | | | | | | | 5 x 5.4 | 43 | 0.20 | 6.3 x 5.4 | 66 | 0.16 |
| 47 | 4 x 5.4 | 34 | 0.35 | 4 x 5.4 | 38 | 0.26 | 5 x 5.4 | 43 | 0.30 | 6.3 x 5.4 | 70 | 0.16 |
| | | | | 5 x 5.4 | 46 | 0.26 | 6.3 x 5.4 | 46 | 0.30 | 6.3 x 7.7 | 75 | 0.18 |
| 100 | 5 x 5.4 | 61 | 0.35 | 6.3 x 5.4 | 71 | 0.26 | 5 x 5.4 | 60 | 0.30 | 6.3 x 5.4 | 70 | 0.20 |
| | | | | | | | 6.3 x 5.4 | 70 | 0.26 | 6.3 x 7.7 | 85 | 0.20 |
| | | | | | | | | | | 8 x 6.5 | 86 | 0.20 |
| 220 | 6.3 x 5.4 | 82 | 0.35 | 6.3 x 5.4 | 190 | 0.26 | 6.3 x 7.7 | 105 | 0.26 | 6.3 x 7.7 | 105 | 0.20 |
| | | | | 6.3 x 7.7 | 235 | 0.35 | 8 x 6.5 | 250 | 0.26 | 8 x 10.5 | 280 | 0.20 |
| | | | | 8 x 6.5 | 250 | 0.35 | | | | | | |
| 330 | | | | 6.3 x 7.7 | 280 | 0.35 | 8 x 10.5 | 330 | 0.26 | 8 x 10.5 | 316 | 0.20 |
| | | | | 8 x 6.5 | 300 | 0.35 | | | | 10 x 10.5 | 380 | 0.20 |
| | | | | 8 x 10.5 | 340 | 0.35 | | | | | | |
| 470 | | | | 8 x 10.5 | 380 | 0.35 | 8 x 10.5 | 330 | 0.26 | 8 x 10.5 | 350 | 0.20 |
| | | | | | | | 10 x 10.5 | 400 | 0.26 | 10 x 10.5 | 420 | 0.20 |
| 1000 | | | | 8 x 10.5 | 580 | 0.35 | 10 x 10.5 | 580 | 0.26 | | | |
| | | | | 10 x 10.5 | 700 | 0.35 | | | | | | |
| 1500 | | | | 10 x 10.5 | 1000 | 0.35 | | | | | | |

Note: 1. Ripple Current: (mA/rms) 85°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

D x L: mm

| CAP. (μF) | RATED VOLTAGE WV (SURGE VOLTAGE WV) | | | | | | | | |
|-----------|-------------------------------------|----------------|--------------------|-----------------|----------------|--------------------|-----------------|----------------|--------------------|
| | 25 (32) SIZE | | | 35 (44) SIZE | | | 50 (63) SIZE | | |
| | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR | SIZE | RIPPLE CURRENT | DISSIPATION FACTOR |
| 0.10 | | | | | | | 4 x 5.4 | 1 | 0.12 |
| 0.22 | | | | | | | 4 x 5.4 | 2 | 0.12 |
| 0.33 | | | | | | | 4 x 5.4 | 3 | 0.12 |
| 0.47 | | | | | | | 4 x 5.4 | 5 | 0.12 |
| 1.0 | | | | | | | 4 x 5.4 | 10 | 0.12 |
| 2.2 | | | | 4 x 5.4 | 8 | 0.12 | 4 x 5.4 | 16 | 0.12 |
| 3.3 | | | | 4 x 5.4 | 10 | 0.12 | 4 x 5.4 | 16 | 0.12 |
| 4.7 | 4 x 5.4 | 22 | 0.14 | 4 x 5.4 | 22 | 0.12 | 5 x 5.4 | 23 | 0.12 |
| 10 | 4 x 5.4 | 24 | 0.20 | 4 x 5.4 | 24 | 0.16 | 5 x 5.4 | 28 | 0.12 |
| | 5 x 5.4 | 28 | 0.14 | 5 x 5.4 | 30 | 0.12 | 6.3 x 5.4 | 35 | 0.12 |
| 22 | 5 x 5.4 | 45 | 0.14 | 5 x 5.4 | 49 | 0.23 | 6.3 x 5.4 | 70 | 0.12 |
| | 6.3 x 5.4 | 55 | 0.14 | 6.3 x 5.4 | 60 | 0.12 | 6.3 x 7.7 | 90 | 0.12 |
| | | | | | | | 8 x 6.5 | 110 | 0.12 |
| 33 | 5 x 5.4 | 53 | 0.14 | 6.3 x 5.4 | 100 | 0.14 | 6.3 x 7.7 | 90 | 0.12 |
| | 6.3 x 5.4 | 65 | 0.14 | 8 x 6.5 | 130 | 0.14 | 8 x 10.5 | 120 | 0.12 |
| 47 | 6.3 x 5.4 | 70 | 0.20 | 6.3 x 7.7 | 150 | 0.14 | 6.3 x 7.7 | 63 | 0.12 |
| | 8 x 6.5 | 96 | 0.16 | 8 x 6.5 | 165 | 0.14 | 8 x 10.5 | 100 | 0.12 |
| | | | | | | | 10 x 10.5 | 130 | 0.12 |
| 100 | 6.3 x 7.7 | 115 | 0.16 | 6.3 x 7.7 | 140 | 0.14 | 8 x 10.5 | 160 | 0.12 |
| | 8 x 6.5 | 140 | 0.16 | 8 x 6.5 | 170 | 0.14 | 10 x 10.5 | 190 | 0.12 |
| | 8 x 10.5 | 180 | 0.16 | 10 x 10.5 | 210 | 0.14 | | | |
| 220 | 8 x 6.5 | 210 | 0.16 | 8 x 10.5 | 250 | 0.14 | 10 x 10.5 | 310 | 0.12 |
| | 8 x 10.5 | 260 | 0.16 | 10 x 10.5 | 310 | 0.14 | | | |
| | 10 x 10.5 | 310 | 0.16 | | | | | | |
| 330 | 8 x 10.5 | 350 | 0.16 | 10 x 10.5 | 400 | 0.14 | | | |
| | 10 x 10.5 | 430 | 0.16 | | | | | | |
| 470 | 10 x 10.5 | 480 | 0.16 | | | | | | |

Note: 1. Ripple Current: (mA/rms) 85°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz

CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

D x L: mm

| CAP. (μF) | RATED VOLTAGE WV (SURGE VOLTAGE WV) | | | | | |
|-----------|-------------------------------------|-------------------|-----------------------|-------------------|-------------------|-----------------------|
| | 63 (79) SIZE | | | 100 (125) SIZE | | |
| | | RIPPLE CURRENT | DISSIPATION FACTOR | | RIPPLE CURRENT | DISSIPATION FACTOR |
| 3.3 | | | | 8 x 10.5 | 30 | 0.18 |
| 4.7 | 6.3 x 5.4 | 20 | 0.18 | 8 x 10.5 | 50 | 0.18 |
| 10 | 6.3 x 5.4 | 20 | 0.18 | 8 x 10.5 | 55 | 0.18 |
| 22 | 8 x 10.5 | 30 | 0.18 | 10 x 10.5 | 60 | 0.18 |
| 33 | 8 x 10.5 | 30 | 0.18 | 10 x 10.5 | 65 | 0.18 |
| 47 | 8 x 10.5 | 30 | 0.18 | | | |
| 100 | 10 x 10.5 | 60 | 0.18 | | | |

Note: 1. Ripple Current: (mA/rms) 85°C, 120Hz

2. Dissipation Factor: 20°C, 120Hz

单击下面可查看定价，库存，交付和生命周期等信息

[>>Yageo\(国巨\)](#)