

**25 A GLASS PASSIVATED BRIDGE RECTIFIER**

**Reverse Voltage - 100 to 1200 V**

**Forward Current – 25 A**

**FEATURES**

- ◆ High current capability
- ◆ Low forward voltage drop
- ◆ Glass Passivated Chip Junction
- ◆ Low power loss, high efficiency
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: GBPC
- ◆ Polarity: Symbol marked on body
- ◆ Mounting position: Any



**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbols	GBPC 2501	GBPC 2502	GBPC 2504	GBPC 2506	GBPC 2508	GBPC 2510	GBPC 2512	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	1200	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	1140	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	1200	V
Maximum Average Forward Rectified Current @T <sub>c</sub> =55 °C	$I_{(AV)}$	25							A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	350							A
Forward Voltage per element @I <sub>F</sub> =12.5A and 25°C	$V_F$	1.1							V
Maximum DC Reverse Current @T <sub>j</sub> =25°C at Rated DC Blocking Voltage @T <sub>j</sub> =125°C	$I_R$	5 500							μA
I <sup>2</sup> t Rating for Fusing(3ms≤t≤8,3ms)	$I^2t$	508.4							A <sup>2</sup> S
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +150							°C

- (1) Measured at 1 MHz and applied reverse voltage of 4 V D.C
- (2) Thermal Resistance Junction to Case, Lead and Ambient.

Fig. 1 - Forward Current Derating Curve

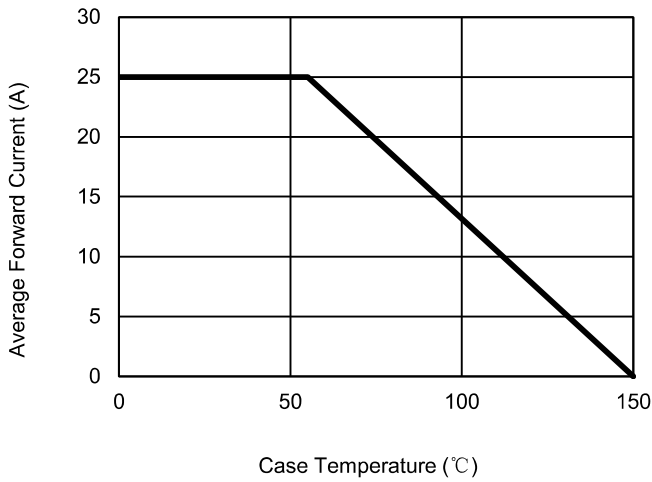


Fig. 2 - Maximum Non-Repetitive Surge Current

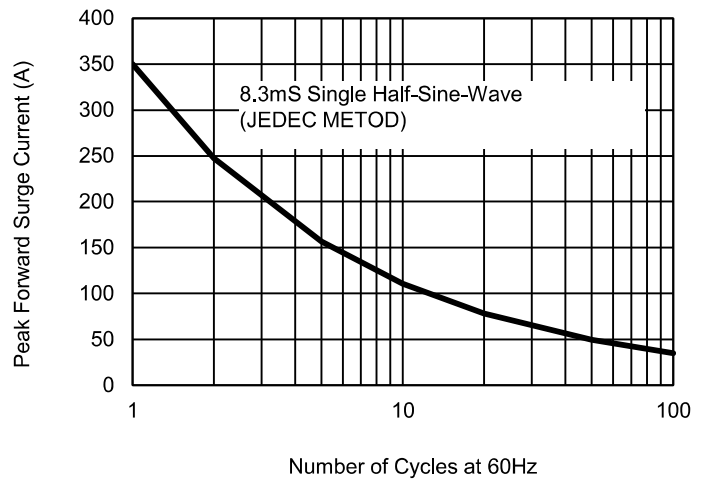


Fig. 3 - Typical Reverse Characteristics



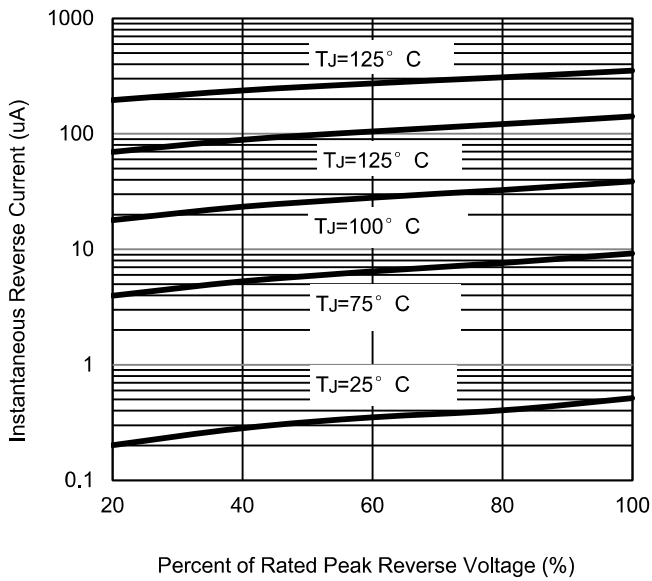


Fig. 4 - Typical Forward Characteristics

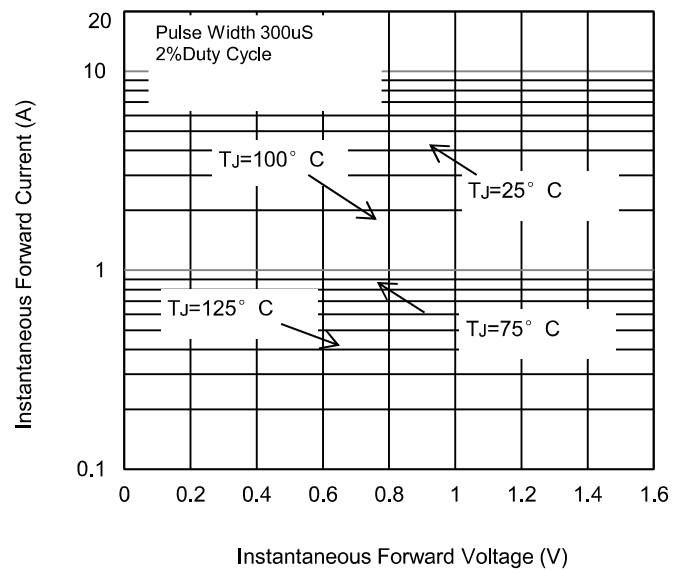

Package Outline

GBPC

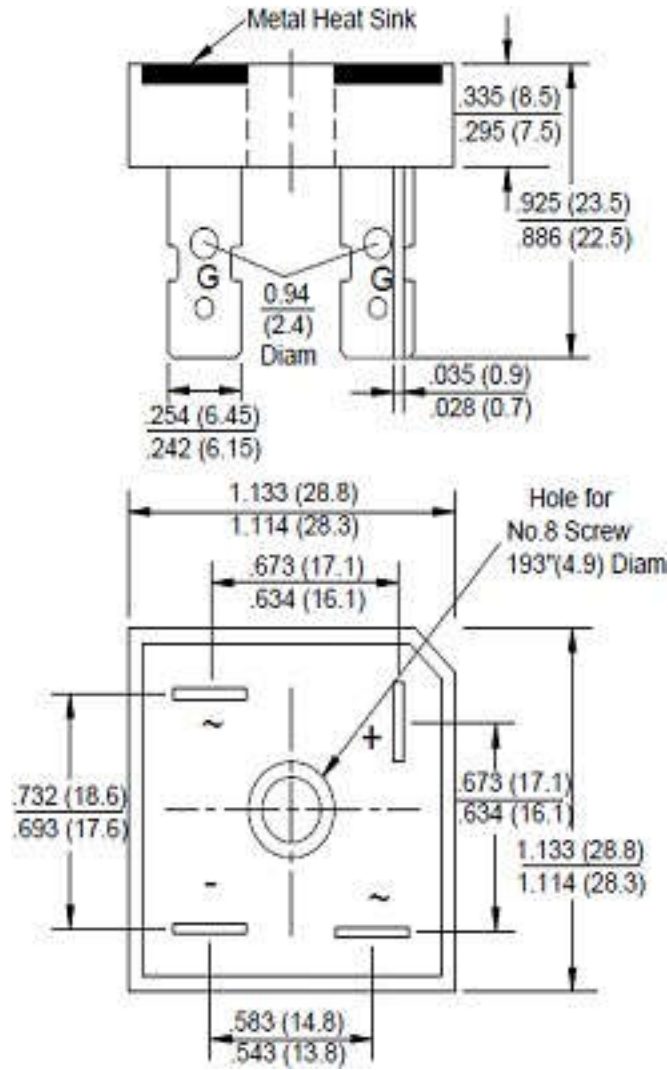

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
GBPC	BOX	50	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)