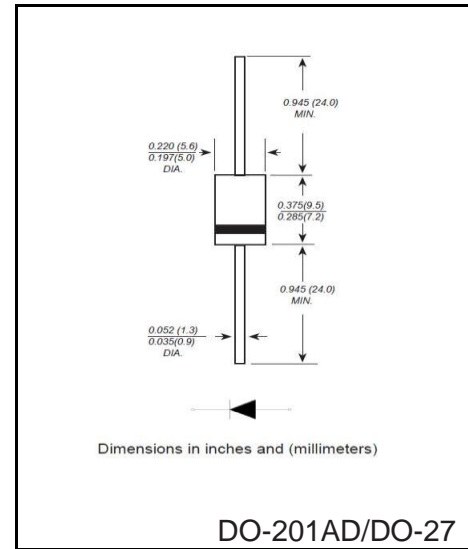


**Trench MOS Barrier Schottky Rectifier**
**Reverse Voltage - 200 V**
**Forward Current - 5 A**
**FEATURES**

- ◆ Advanced trench technology
- ◆ Low forward voltage drop
- ◆ Low power losses
- ◆ High efficiency operation
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: DO-201AD/DO-27
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.98g / 0.0345oz


**Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified**

Parameter		Symbols	Value	Units
Maximum Repetitive Peak Reverse Voltage		$V_{RRM}$	200	V
Maximum RMS voltage		$V_{RMS}$	200	V
Maximum DC Blocking Voltage		$V_{DC}$	200	V
Maximum Average Forward Rectified Current	Per diode	$I_{F(AV)}$	5	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave superimposed on rated load per diode		$I_{FSM}$	100	A
Operating Temperature Range		$T_J$	-55 ~ +150	°C
Storage Temperature Range		$T_{STG}$	-55 ~ +150	°C
Typical Thermal Resistance Per diode(munted on FR-4 PCB)	DO-27	$R_{\theta JC}$	22	°C/W

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.



**Electrical Characteristics (Per Leg) unless otherwise specified**

Characteristics		Symbols	Value		Units
Forward Voltage Drop(Note2)		$V_F$	Typ	Max	V
at $I_F=3A$ Instantaneous forward voltage per diode	TA=25°C		0.79	0.83	
	TA=125°C		0.68	-	
at $I_F=5A$ Instantaneous forward voltage per diode	TA=25°C		0.84	-	
	TA=125°C	0.79	-		
Instantaneous reverse current per diode at rated reverse voltage	TA=25°C	$I_R$	-	2	uA
	TA=125°C		-	80	mA


Note2: (1)Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


**RATINGS AND CHARACTERISTIC CURVES**

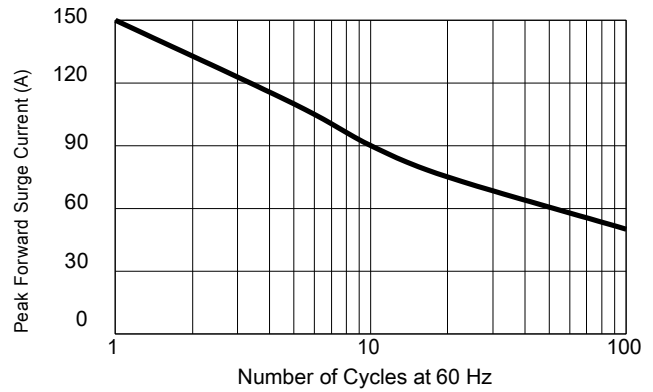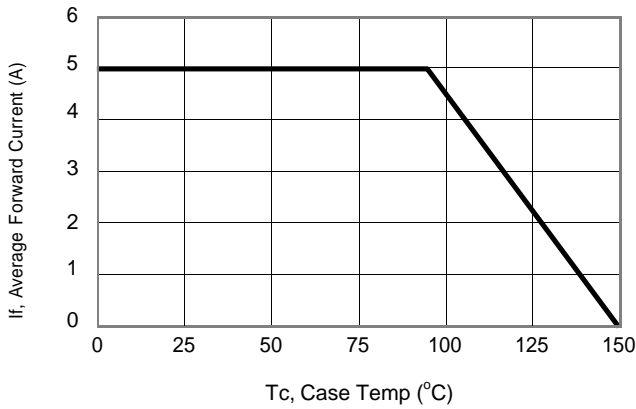


**Current Derating, Case**

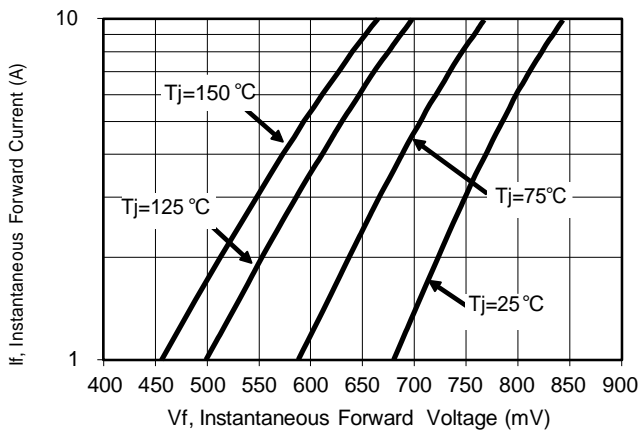

**Maximum Repetitive Surge Current**

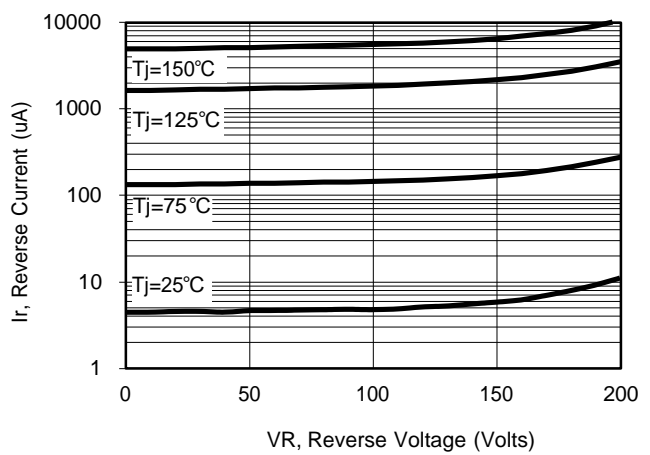

**Typical Forward Voltage**

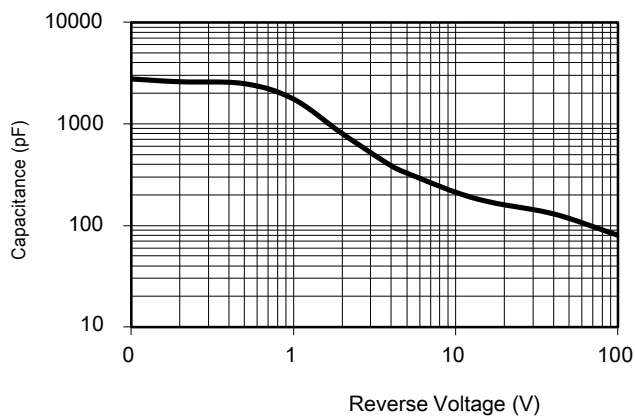

**Typical Reverse Current**

**Typical Junction Capacitance**

**Package Outline DO-201AD(DO-27)**



DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.370	---	9.50	
B	---	.250	---	6.40	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	

**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
DO-201AD(DO-27)	BOX	250/1000/1250	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)