

Trench MOS Barrier Schottky Rectifier

Reverse Voltage - 150 V

Forward Current - 5 A




FEATURES

- ◆ Advanced trench technology
- ◆ Low forward voltage drop
- ◆ Low power losses
- ◆ High efficiency operation
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: DO-201AD/DO-27
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.98g / 0.0345oz

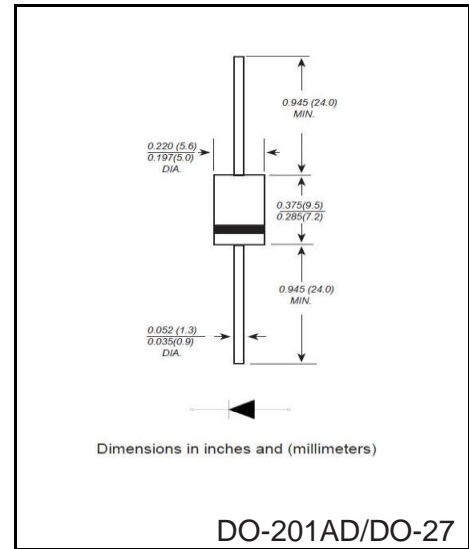

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Parameter		Symbols	Value	Units
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	150	V
Maximum RMS voltage		V_{RMS}	150	V
Maximum DC Blocking Voltage		V_{DC}	150	V
Maximum Average Forward Rectified Current	Per diode	$I_{F(AV)}$	5	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave superimposed on rated load per diode		I_{FSM}	120	A
Operating Temperature Range		T_J	-40 ~ +150	°C
Storage Temperature Range		T_{STG}	-40~ +150	°C
Typical Thermal Resistance Per diode(munted on FR-4 PCB)	DO-27	$R_{\theta JC}$	22	°C/W

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.


Electrical Characteristics (Per Leg) unless otherwise specified

Characteristics		Symbols	Value		Units
Forward Voltage Drop(Note2)		V_F	Typ	Max	V
at $I_F=1A$ Instantaneous forward voltage per diode	TA=25°C		0.53	0.60	
	TA=125°C		0.48	-	
at $I_F=5A$ Instantaneous forward voltage per diode	TA=25°C		0.89	0.95	
	TA=125°C	0.82	-		
Instantaneous reverse current per diode at rated reverse voltage	TA=25°C	I_R	5	10	uA
	TA=125°C		-	5	mA


**Note2: (1)Pulse test: 300 μs pulse width, 1 % duty cycle
(2) Pulse test: Pulse width ≤ 40 ms**

RATINGS AND CHARACTERISTIC CURVES


RATINGS AND CHARACTERISTICS CURVES

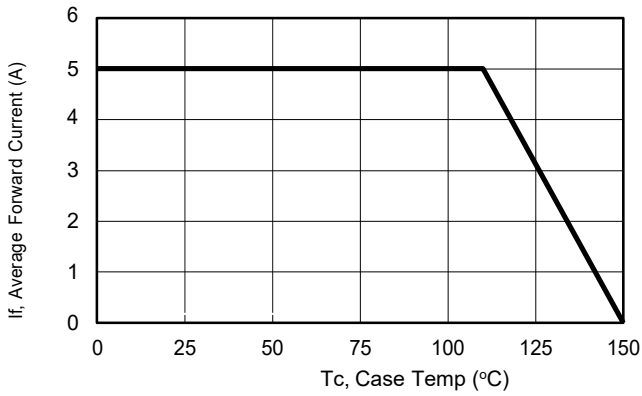


Current Derating, Case

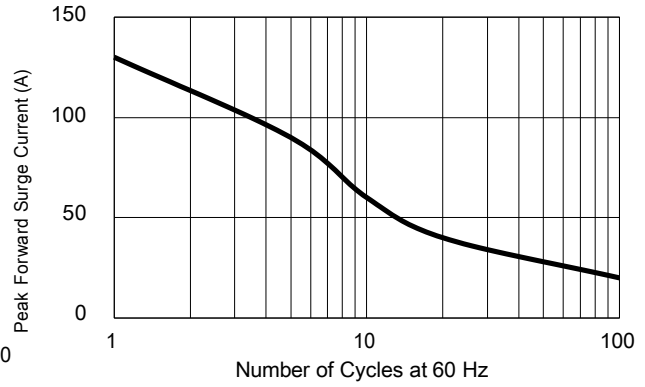


Maximum Repetitive Surge Current

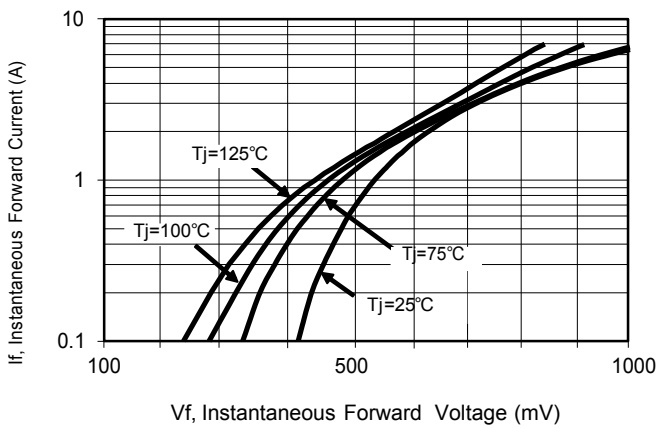

Typical Forward Voltage

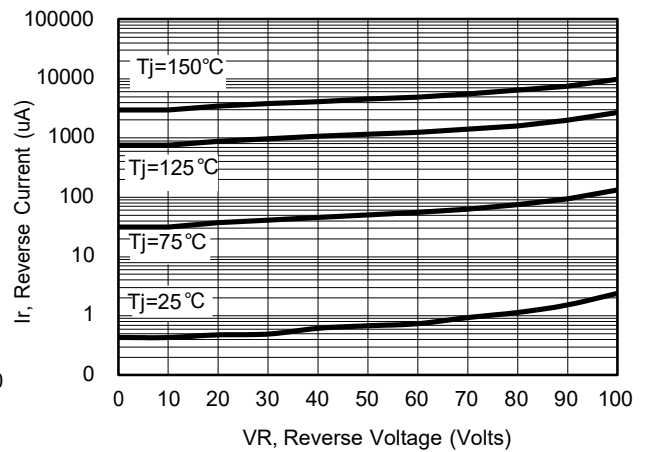

Typical Reverse Current

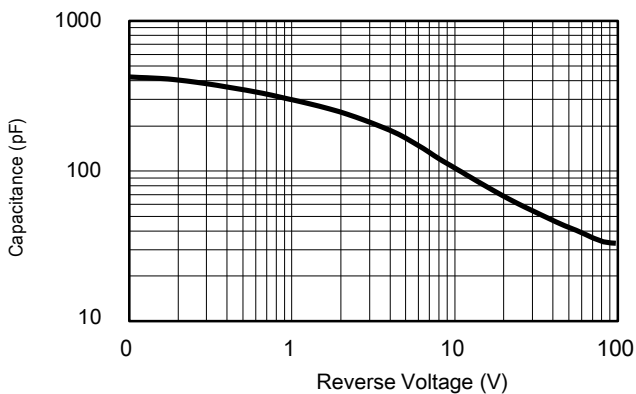

Typical Junction Capacitance

Package Outline DO-201AD(DO-27)



DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.370	---	9.50	
B	---	.250	---	6.40	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-201AD(DO-27)	BOX	250/1000/1250	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)