


Fast Recovery Epi Diodes

Reverse Voltage - 600V

Forward Current - 30 A

FEATURES

- High frequency operation
- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7s, per JESD 22-B106

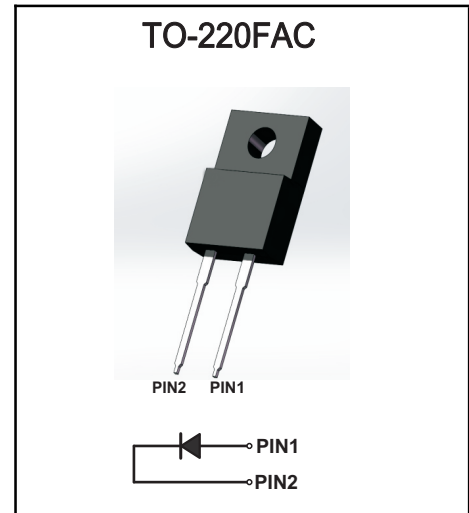

MECHANICAL DATA

- Case: TO-220FAC
- Approx. Weight: 2.15g (0.076oz)
- Terminals: Lead solderable per MIL-STD-202, Method 208
- Lead free finish, RoHS compliant
- Case Material: “Green” molding compound, UL flammability classification 94V-0, “Halogen-free”.

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Parameter	Symbols	Value	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Rectified Current @Tc=100°C	$I_{F(AV)}$	30	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave superimposed on rated load per diode	I_{FSM}	300	A
Instantaneous forward voltage at 30A	V_F	1.6	V
Maximum instantaneous reverse current at rated DC blocking voltage	I_R	10 500	uA
Maximum Reverse Recovery Time NOTE 1	t_{rr}	35	ns
Maximum Thermal Resistance Junction To Case	$R_{\theta JC}$	4	°C/W
Operating Temperature Range	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

NOTE 1: Reverse recovery test conditions $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

RATINGS AND CHARACTERISTIC CURVES

Fig.1 TYPICAL FORWARD CURRENT DERATING CURVE

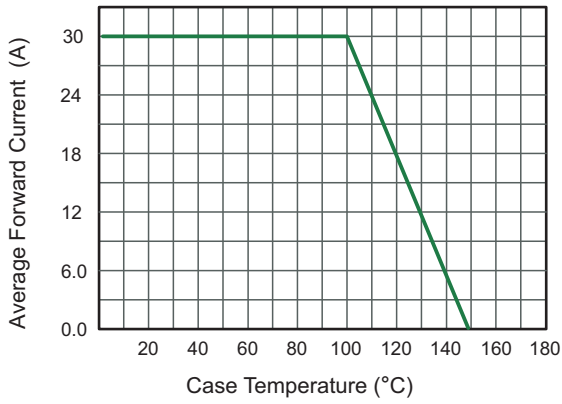


Fig.2 Typical Reverse Characteristics

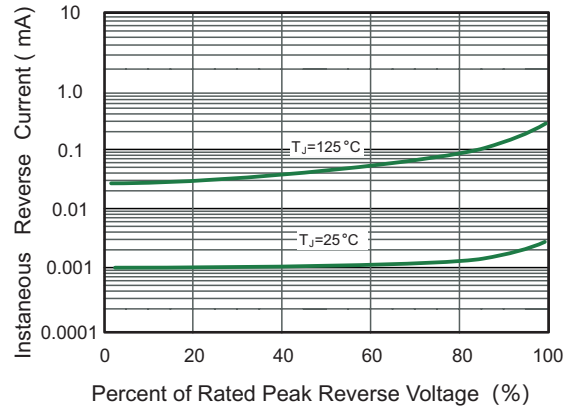


Fig.3 Typical Forward Characteristics


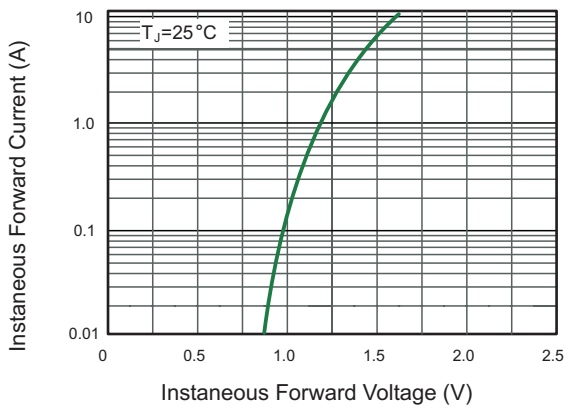



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

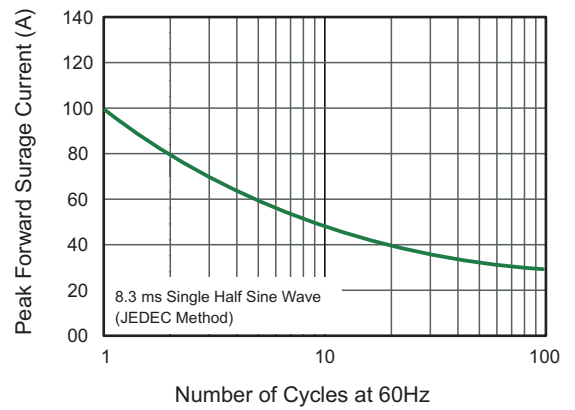

Package Outline Dimensions Millimeters

Through Hole Package ; 2 leads

TO-220FAC

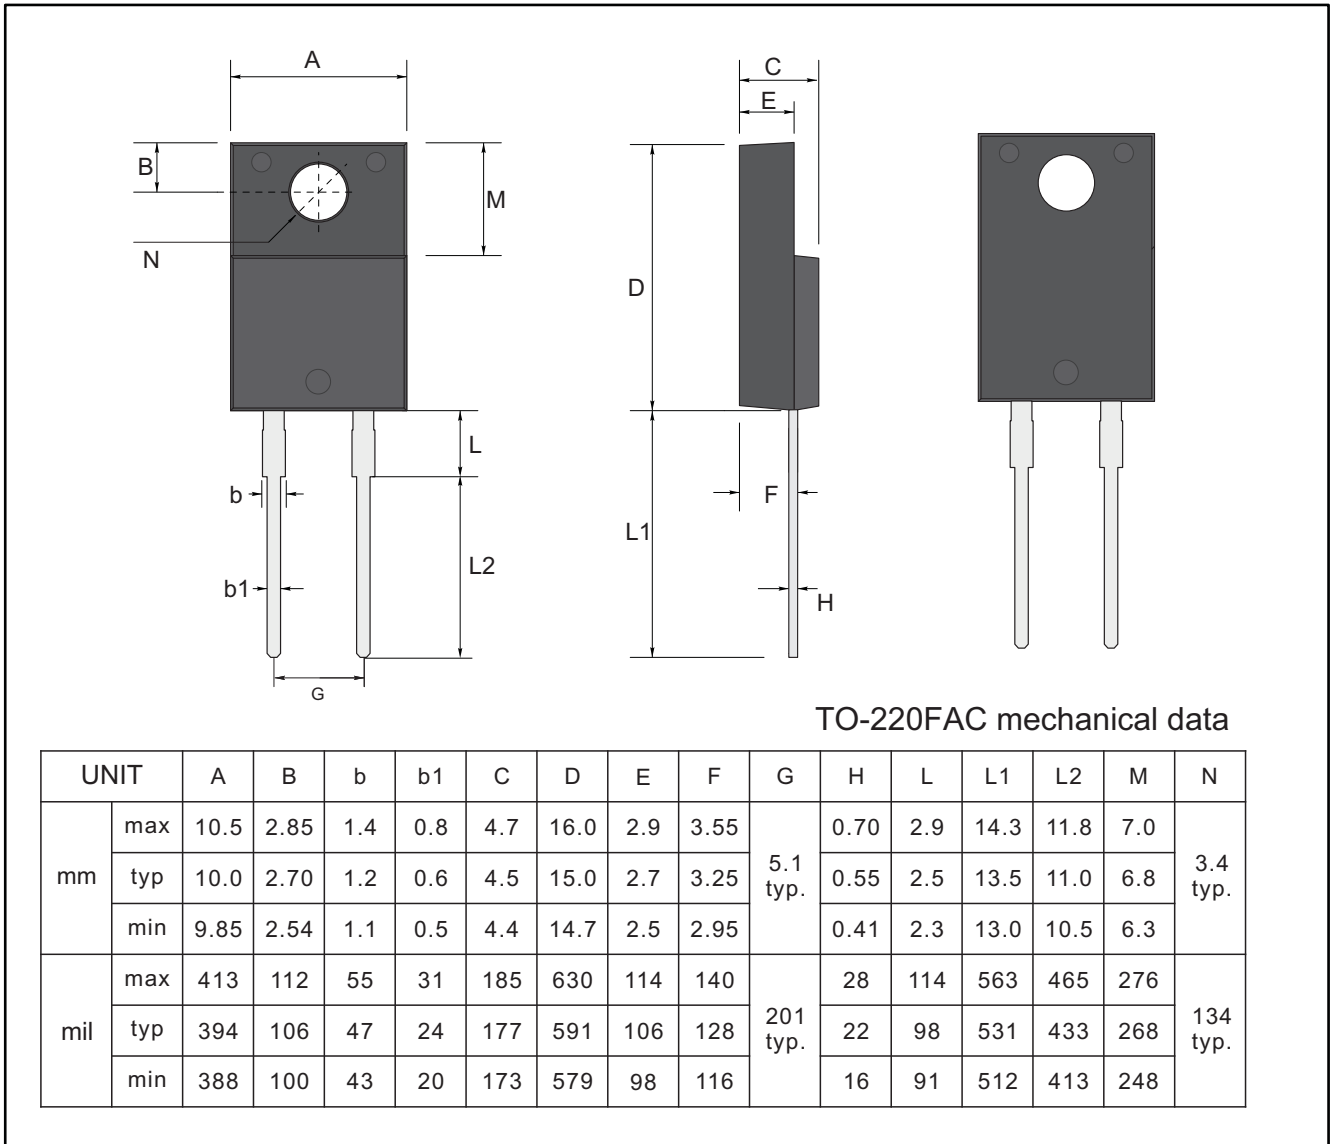

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)