

15A GLASS PASSIVATED BRIDGE RECTIFIER REVERSE

Voltage - 100 to 1000 V


Forward Current – 15A

FEATURES

- ◆Glass passivated chip
- ◆Low Reverse Leakage Current
- ◆High surge current capability
- ◆Case to Terminal Isolation Voltage 2500V

MECHANICAL DATA

- ◆Case: KBU
- ◆Terminals: Solderable per MIL-STD-202, Method 208
- ◆Approx. Weight: 8.0g / 0.3oz

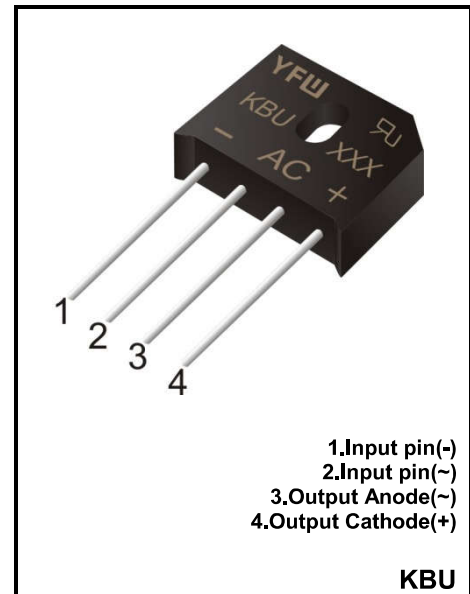

1.Input pin(-)
2.Input pin(~)
3.Output Anode(~)
4.Output Cathode(+)

KBU

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	KBU1501	KBU1502	KBU1504	KBU1506	KBU1508	KBU1510	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C=85^{\circ}C$	$I_{F(AV)}$	15						A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	320						A
Forward Voltage Per Leg @ $I_{FM}=15.0A$	V_F	1.1						V
Maximum DC Reverse Current @ $T_a=25^{\circ}C$ at Rated DC Blocking Voltage @ $T_a=125^{\circ}C$	I_R	5 500						μA
Rating for Fusing($3ms \leq t \leq 8.3ms$)	I_{2t}	166						A^2S
Rms isolation voltage from case to Leads	C_J	2500						V
Maximum thermal resistance per leg	$R_{\theta JC}$	4.2						$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{stg}	-55 ~ +150						$^{\circ}C$

(1) Junction to case with heatsink

(2) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw

Characteristics(Typical)

Fig.1-forwardCurrent derating Curve
图1正向电流降额曲线

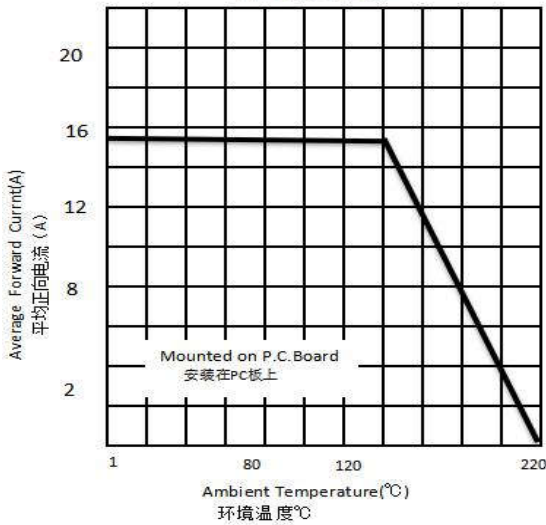


Fig.2-Maximum Non-Repetitive Surge Current

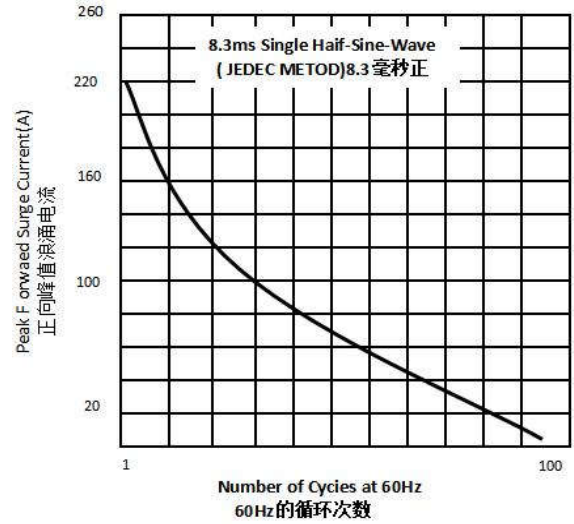


FIG3.Typical Reverse Characteristics

图3. 典型反向特性


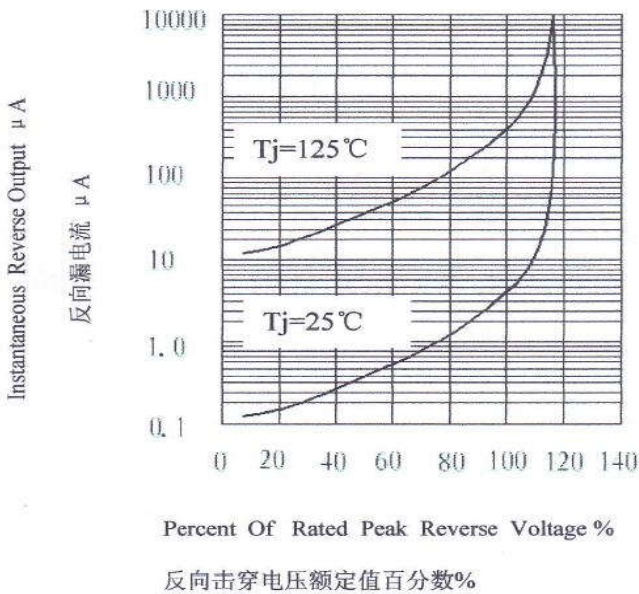



FIG4.Instantaneous Forward Voltage

图4. 典型正向特性

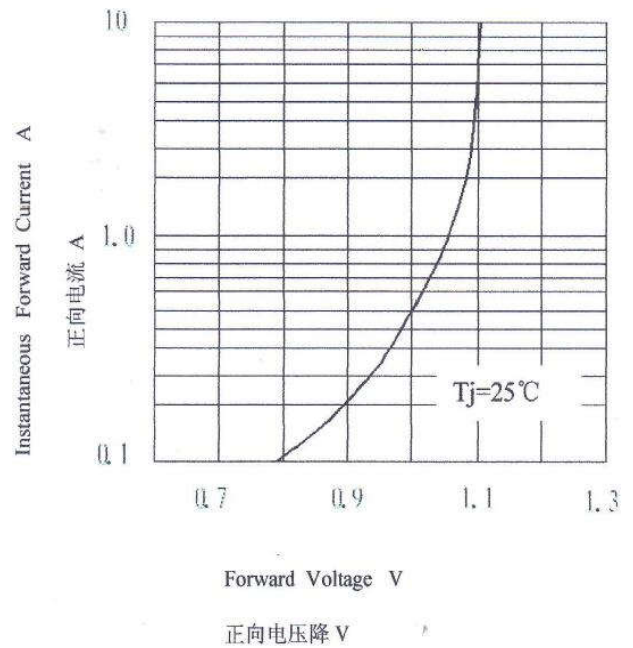

Package Outline

KBU

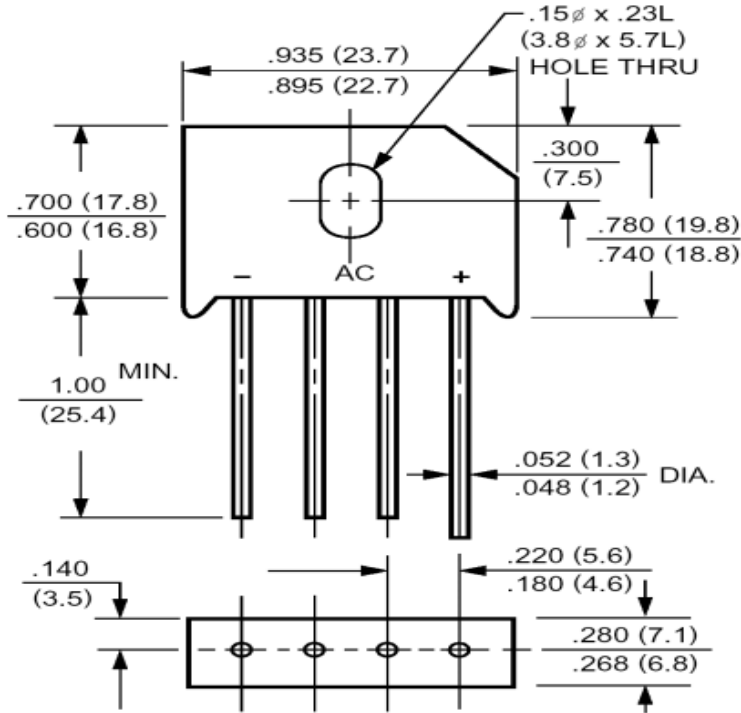

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
KBU	BOX	400	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)