

**Surface Mount Schottky Barrier Rectifier**
**Reverse Voltage - 20 to 200 V**
**Forward Current - 1 A**
**FEATURES**


- ◆ Metal silicon junction, majority carrier conduction
- ◆ For surface mounted applications
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- ◆ Case: SOD-123FL
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 15mg / 0.00048oz

**Absolute Maximum Ratings and Electrical characteristics**


Ratings at 25 ° ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

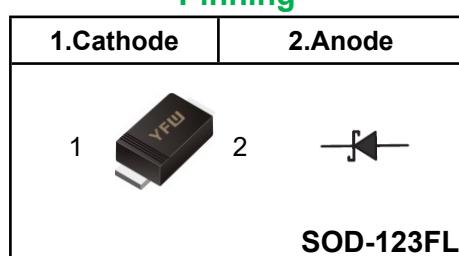


Parameter	Symbols	DS12W	DS14W	DS16W	DS18W	DS110W	DS112W	DS115W	DS120W	Units													
Maximum Repetitive Peak Reverse Voltage	<b>V<sub>RRM</sub></b>	20	40	60	80	100	120	150	200	<b>V</b>													
Maximum RMS voltage	<b>V<sub>RMS</sub></b>	14	28	42	56	70	84	105	140	<b>V</b>													
Maximum DC Blocking Voltage	<b>V<sub>DC</sub></b>	20	40	60	80	100	120	150	200	<b>V</b>													
Maximum Average Forward Rectified Current	<b>I<sub>F(AV)</sub></b>	1.0								<b>A</b>													
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed On Rated Load (JEDEC method)	<b>I<sub>FSM</sub></b>	40				30				<b>A</b>													
Maximum Instantaneous Forward Voltage at 1 A	<b>V<sub>F</sub></b>	0.55		0.70		0.85		0.90		<b>V</b>													
Maximum Instantaneous Reverse Current <small>T<sub>A</sub> = 25°C at Rated DC Reverse Voltage T<sub>A</sub> = 100°C</small>	<b>I<sub>R</sub></b>	0.3 10			0.2 5			0.1 2		<b>mA</b>													
Typical Junction Capacitance <sup>(1)</sup>	<b>C<sub>j</sub></b>	110		80						<b>pF</b>													
Typical Thermal Resistance <sup>(2)</sup>	<b>R<sub>θJA</sub></b>	100								<b>°C/W</b>													
Operating Junction Temperature Range	<b>T<sub>j</sub></b>	-55 ~ +150								<b>°C</b>													
Storage Temperature Range	<b>T<sub>stg</sub></b>	-55 ~ +150								<b>°C</b>													

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C
(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

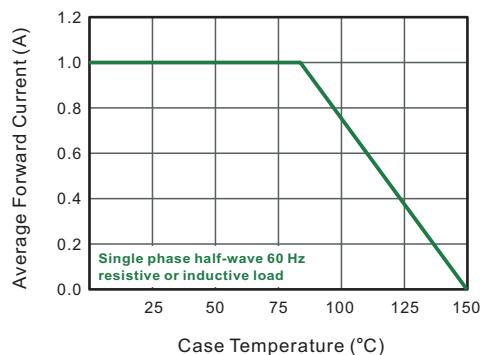


**Fig.2 Typical Reverse Characteristics**

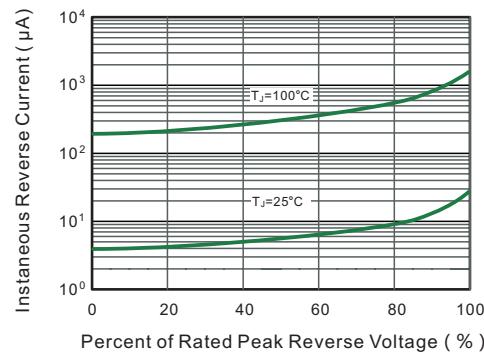


**Fig.3 Typical Forward Characteristic**

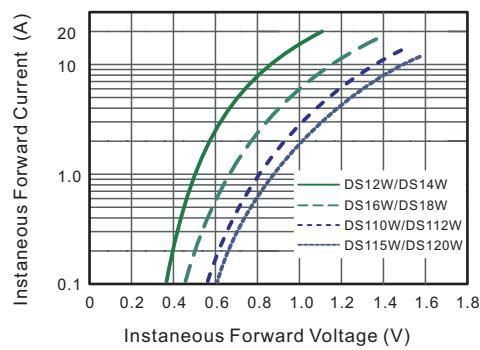


**Fig.4 Typical Junction Capacitance**

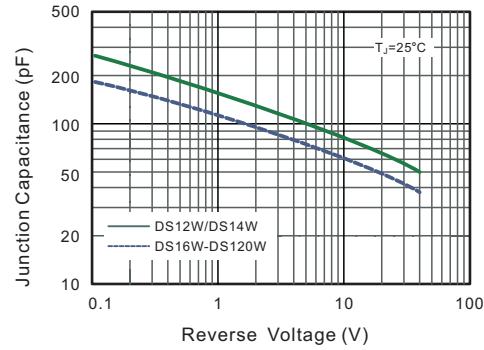


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

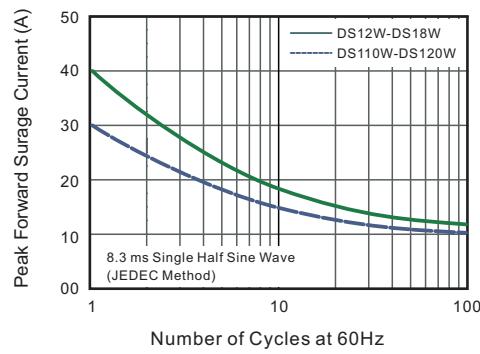


**Fig.6-Typical Transient Thermal Impedance**

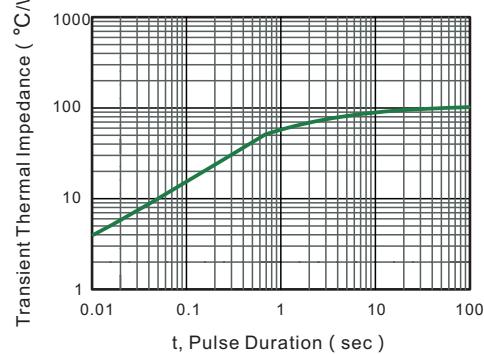

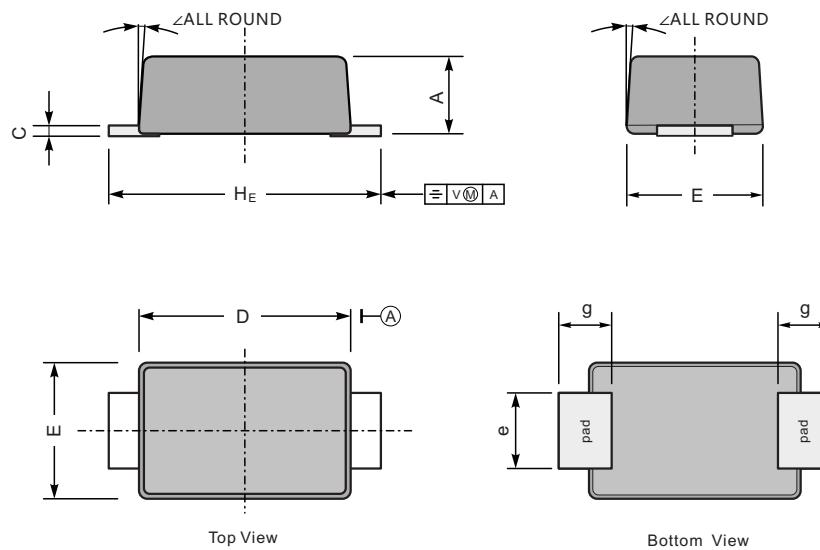**Package Outline**
**SOD-123FL**
**Plastic surface mounted package; 2leads**


UNIT		A	C	D	E	e	g	H_E	θ
mm	max	1.3	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	7°
	min	35	4.7	102	67	31	28	138	

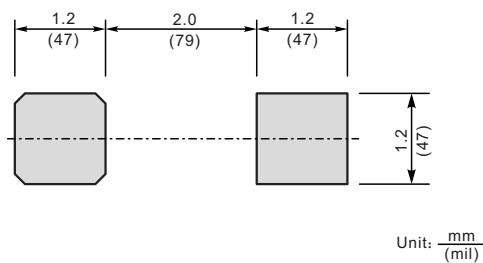**The recommended mounting pad size**

Unit:  $\frac{\text{mm}}{(\text{mil})}$ 
**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
SOD-123FL	Tape/Reel, 13" reel	10000	EIA-481-1
	Tape/Reel, 7" reel	3000	EIA-481-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)