

**ULTRA LOW VF SCHOTTKY RECTIFIER**
**Reverse Voltage - 150 V**
**Forward Current - 40 A**
**FEATURES**

- ♦ Ultra low forward voltage
- ♦ High current capability
- ♦ High forward surge capability
- ♦ Low power losses, High efficiency
- ♦ Guarding for over voltage protection

**APPLICATIONS**

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

**MECHANICAL DATA**

- ♦ Case: Molded plastic
- ♦ Polarity: As marked
- ♦ Mounting Position: Any
- ♦ Molded Plastic: UL Flammability Classification Rating 94V-0
- ♦ Lead free in compliance with EU RoHS 2011/65/EU directive
- ♦ Solder bath temperature 275°C maximum,10s per JESD 22-B106

**Primary Characteristic**

<b>I<sub>o</sub></b>	<b>40A</b>
<b>V<sub>RRM</sub></b>	<b>150V</b>
<b>I<sub>FSM</sub></b>	<b>300A</b>
<b>V<sub>F</sub></b>	<b>0.70V</b>
<b>T<sub>J</sub> Max</b>	<b>150°C</b>

**Maximum Ratings at Ta=25°C unless otherwise specified**


Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	150	V
Working Peak Reverse Voltage	V <sub>RWM</sub>	105	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	150	V
Maximum Average Forward Rectified Current	Per Leg	20	A
	Total	40	
Peak Forward Surge Current,8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	300	A
Operating Temperature Range	T <sub>J</sub>	-50 to +150	°C
Storage Temperature Range	T <sub>STG</sub>	-50 to +150	°C
Typical Thermal Resistance (Note1) TO-220AB,TO-263/TO-220F	R <sub>θJC</sub>	2/4	°C/W

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

**Electrical Characteristics unless otherwise specified**

Characteristics	Symbol	Value		Unit	
Forward Voltage Drop(Note2)	V <sub>F</sub>	Typ.	Max.	V	
		at I <sub>F</sub> =5A	0.57		-
		0.5	-		
at I <sub>F</sub> =10A		0.73	-		
		0.6	-		
at I <sub>F</sub> =20A		0.90	1.00		
		0.7	-		
Maximum Reverse Current at V <sub>R</sub> =150V	I <sub>R</sub>	5	20		μA
		5	-		mA

Note2:Pulse test: 300 μs pulse width, 1 % duty cycle

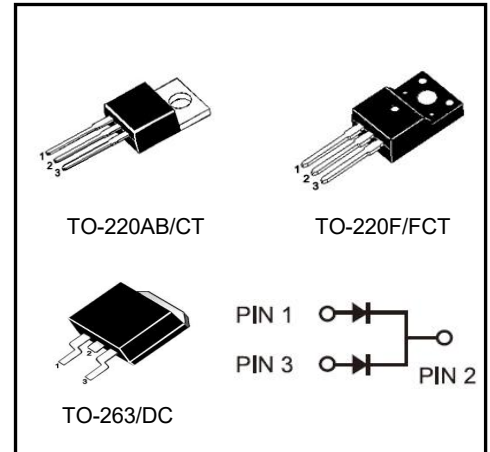

**RATINGS AND CHARACTERISTIC CURVES**

FIG. 1 MAXIMUM FORWARD CURRENT DERATING CURVE

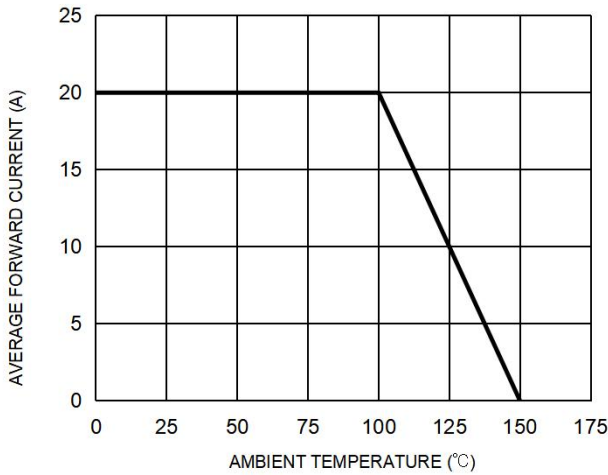


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

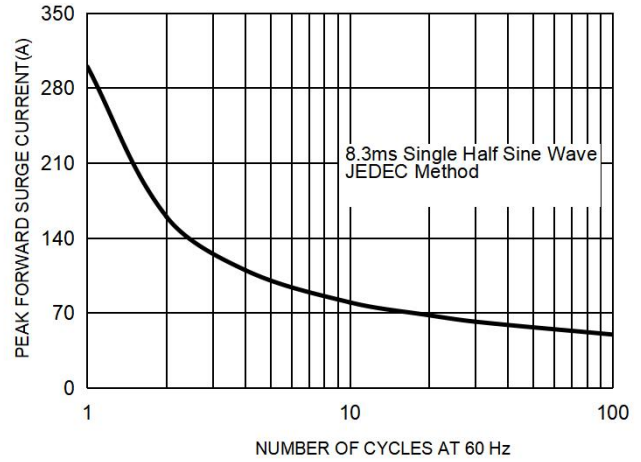


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG




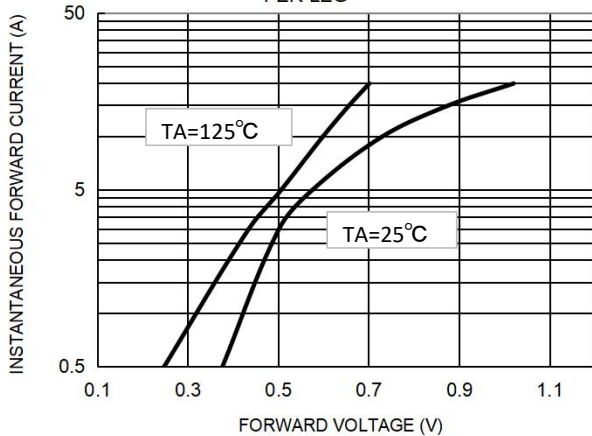


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

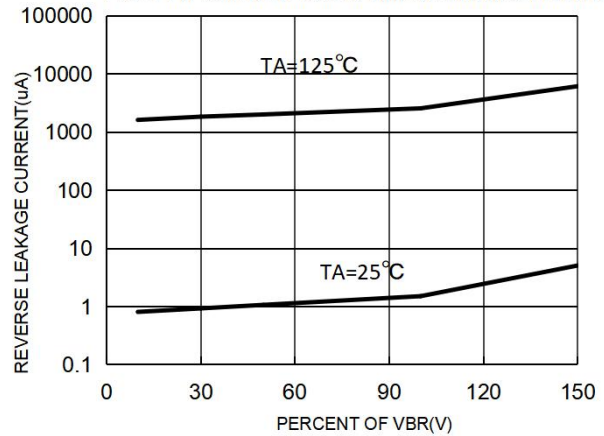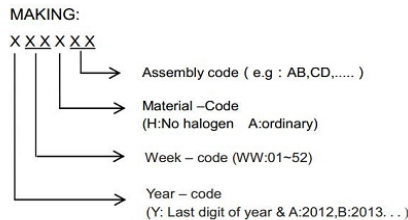

**Marking on the body**

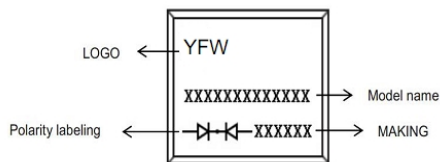


**Ordering Information**

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
SRT40U150CT	TO-220AB	0.07oz(1.96g)	50 pcs / tube	1000pcs/box 5000pcs/carton
SRT40U150FCT	TO-220F	0.06oz(1.74g)	50 pcs / tube	1000pcs/box 5000pcs/carton
SRT40U150DC	TO-263	0.04oz(1.16g)	800 pcs / reel	1600pcs/box 8000pcs/carton


Note: For Halogen Free molding compound, add "H" suffix to part number above.

Package Outline Dimensions millimeters

TO-220AB

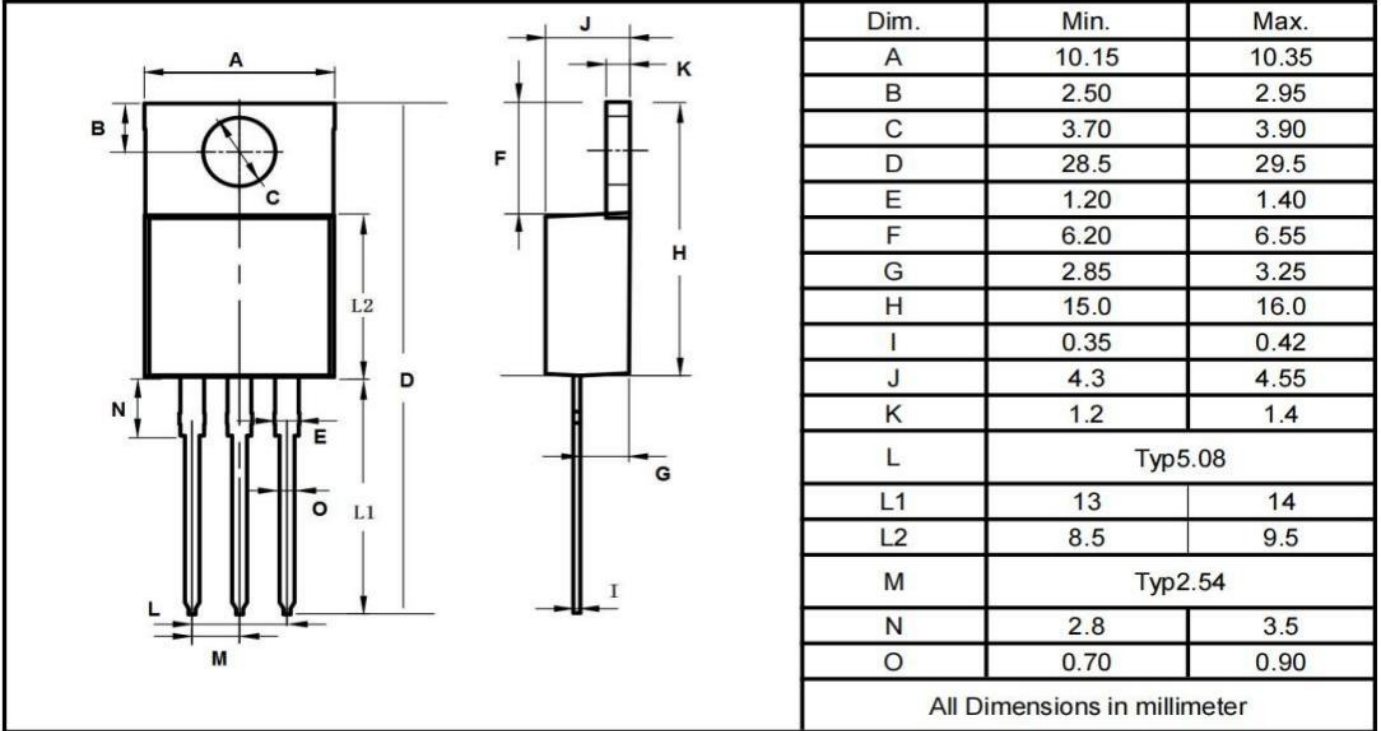


TO-220F

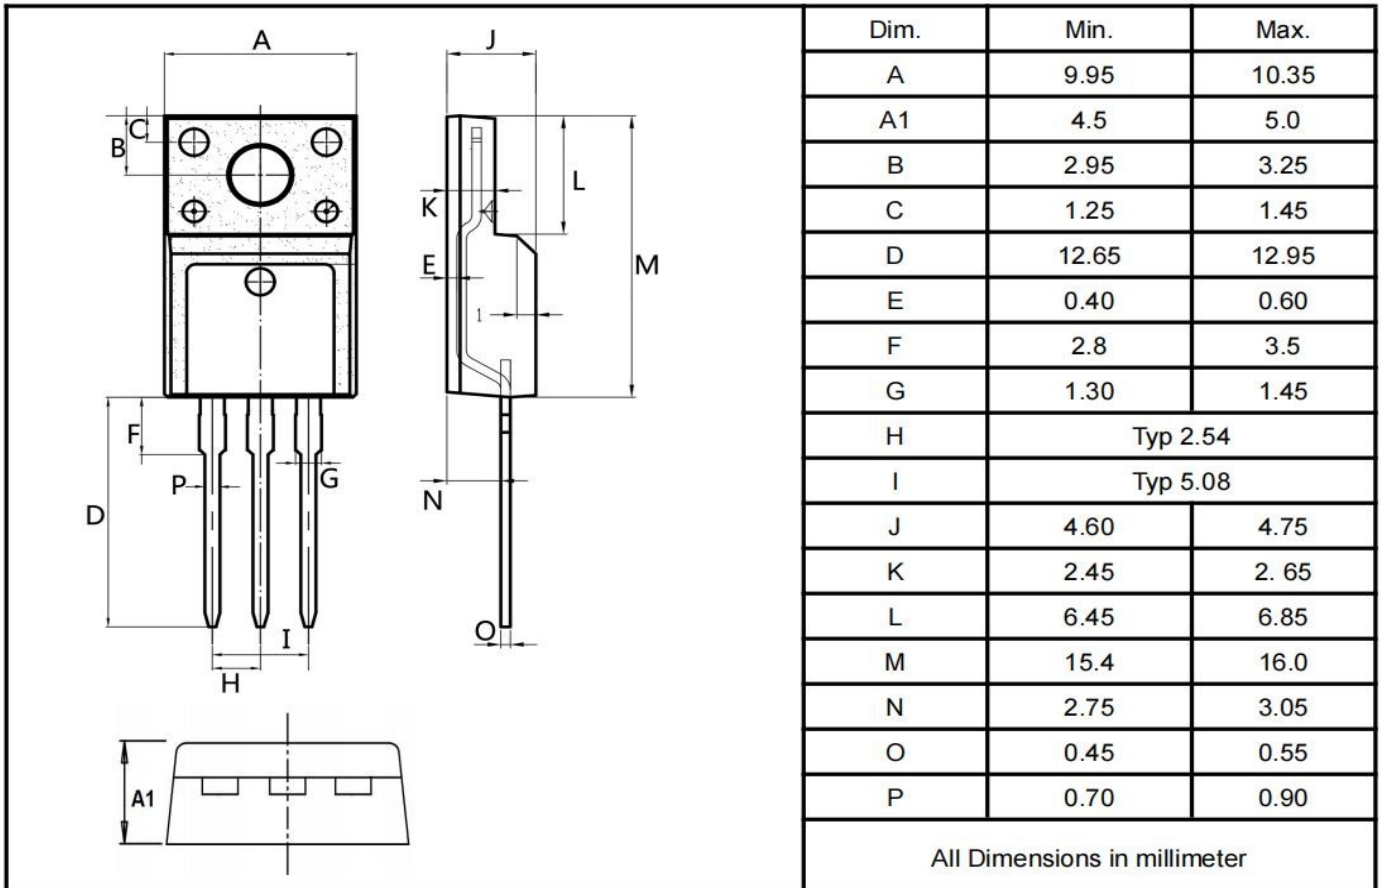

Package Outline Dimensions millimeters

TO-263

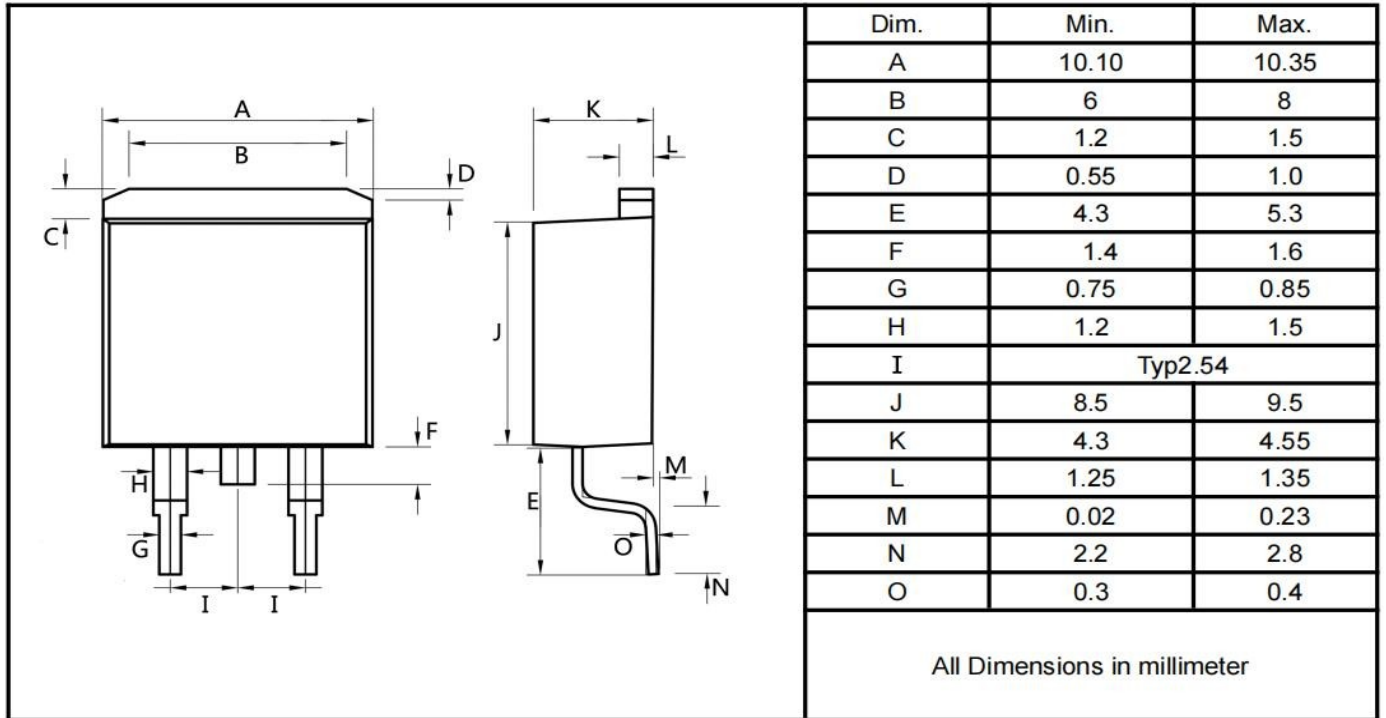

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)