

Fast Recovery Epi Diodes

Reverse Voltage – 600 V


Forward Current – 16 A

Features

- ◆ High frequency operation
- ◆ High surge forward current capability
- ◆ High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- ◆ Guard ring for enhanced ruggedness and long term reliability
- ◆ Solder dip 275 °C max. 7s, per JESD 22-B106

Mechanical Data

- ◆ Case: TO-220AC
- ◆ Approx. Weight: 1.9g (0.067oz)
- ◆ Lead free finish, RoHS compliant
- ◆ Case Material: “Green” molding compound, UL flammability classification 94V-0, “Halogen-free”.

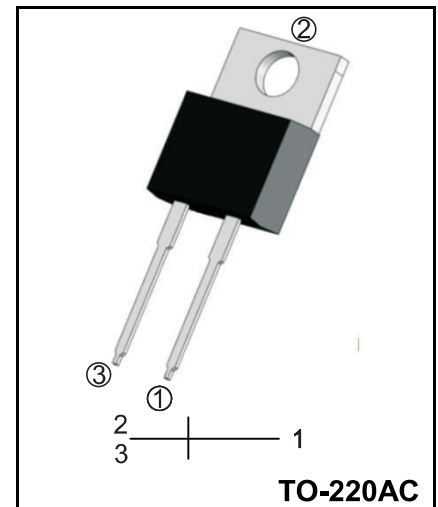

Maximum Ratings (Per Leg) At Ta=25°C Unless Otherwise Specified

Parameter	Symbols	MUR1660AC	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	16	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200	A
Instantaneous forward voltage at 16A	V_F	1.6	V
Maximum instantaneous reverse current at rated DC blocking voltage	I_R	10 500	uA
		Ta=25°C Ta=125°C	
Maximum Reverse Recovery Time NOTE 1	t_{rr}	35	nS
Maximum Thermal Resistance Junction To Case	$R_{\theta JC}$	4	°C/W
Operation Junction Temperature and Storage Temperature	T_J, T_{STG}	-55 ~ +150	°C

Note1: Reverse recovery test conditions $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

Ratings and Characteristic Curves

Fig.1 Typical Forward Current Derating Curve

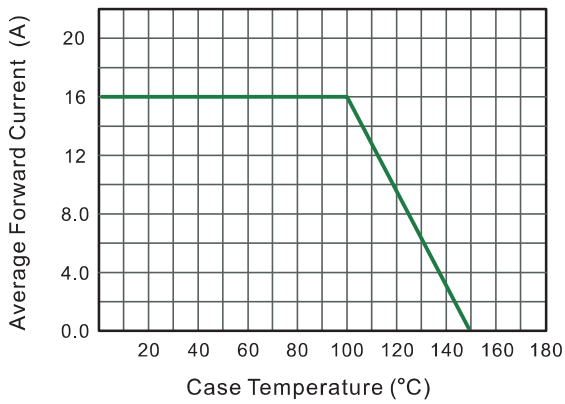


Fig.2 Typical Reverse Characteristics

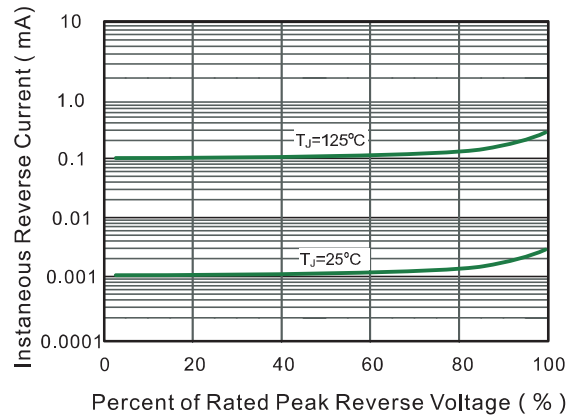


Fig.3 Typical Forward Characteristic


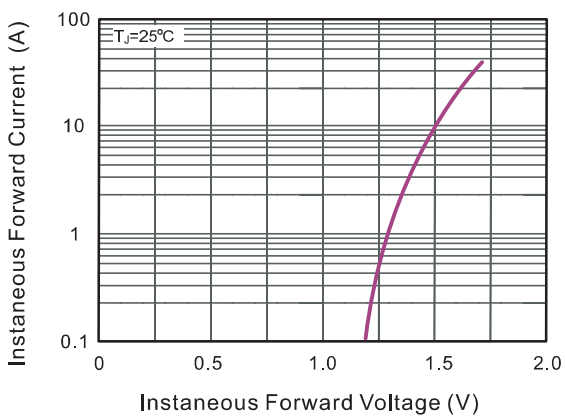



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

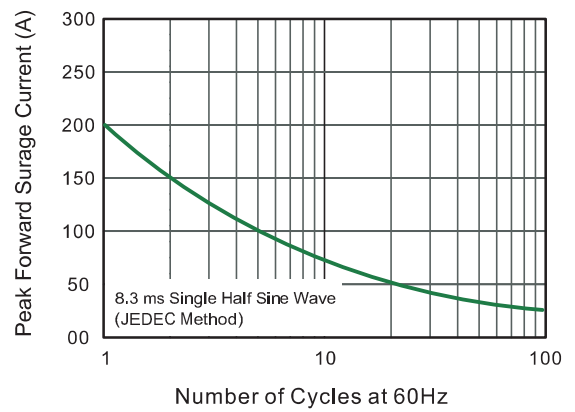

Package Outline Dimensions Millimeters

TO-220AC


Through Hole Package ; 2 leads

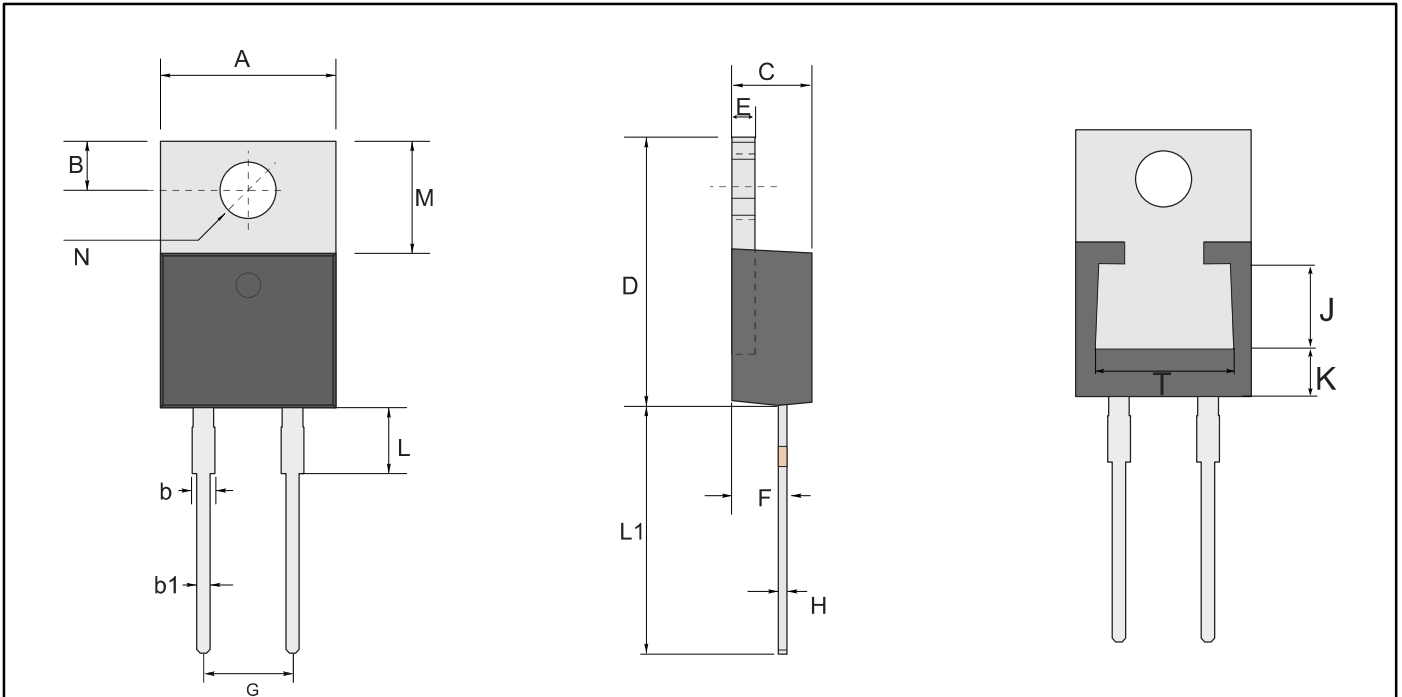

TO-220AC mechanical data

UNIT		A	B	b	b1	C	D	E	F	G	H	L	L1	M	N	J	T	K		
mm	max	10.45	2.94	1.77	0.94	4.76	16.0	1.40	3.37	5.1 typ.	0.64	4.20	14.79	6.39 typ.	3.84 typ.	4.65 ref.	7.7 ref.	3.22 ref.		
	typ	9.94	2.74	1.27	0.81	4.57	15.09	1.27	3.07		0.38	3.89	13.18		252 typ.	151 typ.	183 ref.	303 ref.	127 ref.	
	min	9.85	2.54	1.14	0.62	4.42	14.6	1.14	2.77		0.35	2.80	13.08		15	110	515			
mil	max	411	116	70	37	187	630	55	133	201 typ.	25	165	582	252 typ.	151 typ.	183 ref.	303 ref.	127 ref.		
	typ	391	108	50	32	180	594	50	121		15	153	519		14	110	515			
	min	388	100	45	24	174	575	45	109											

Marking on the body

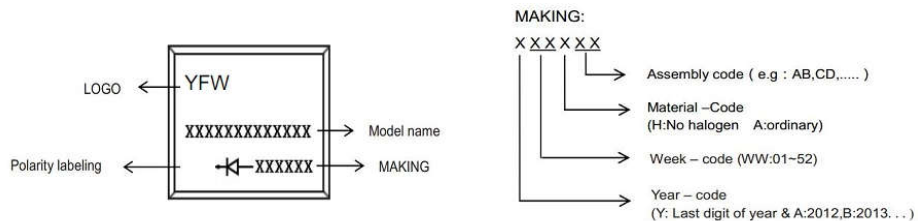

Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
MUR1660AC	TO-220AC	0.067oz(1.9g)	50 pcs / tube	1000pcs/box 5000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

单击下面可查看定价，库存，交付和生命周期等信息

[>>YFW\(佑风微\)](#)