



# MUR3040 THRU MUR3060

## SUPER FAST RECTIFIERS

Reverse Voltage - 400 to 600 Volts Forward Current - 30.0 Amperes


### FEATURES

- Low cost.
- Low leakage.
- Low forward voltage drop.
- High current capability.
- Easily cleaned with Alcohol, Isopropanol and Similar solvents.
- The plastic material carries U/L recognition 94V-0



### MECHANICAL DATA

Case: TO-220AC  
Molding Compound: UL Flammability Classification Rating 94V-0  
Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

### TO-220AC

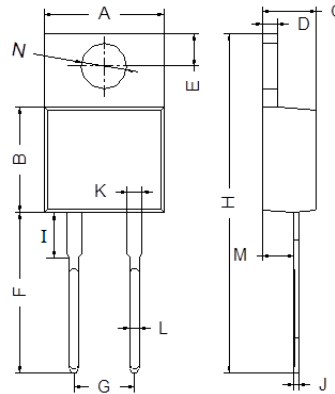

TO-220AC		
Dim	Min	Max
A	9.80	10.30
B	8.30	8.90
C	4.37	4.77
D	1.10	1.45
E	2.62	2.87
F	13.14	13.74
G	4.98	5.18
H	28.40	29.16
I	3.55	4.05
J	0.35	0.58
K	1.20	1.32
L	0.68	0.94
M	2.40	2.60
N	3.71	3.91
All Dimensions in mm		




### MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	MUR3040	MUR3060	Unit
$V_{RRM}$	Reverse Peak Reverse Voltage	400	600	V
$V_{RMS}$	RMS Voltage	280	420	V
$V_{DC}$	DC Blocking Voltage	400	600	V
$I_{F(AV)}$	Average Forward Rectified Current @ $T_A=100^\circ C$	30.0		A
$I_{FSM}$	Peak Forward Surge Current 8.3ms Single Half-sine-wave superimposed on Rsted Load	300		A
$I_R$	Reverse Current $V_R=V_{RRM}, T_A=25^\circ C$ $V_R=V_{RRM}, T_A=150^\circ C$	10 500		$\mu A$
$V_F$	Forward Voltage $I_F=30A$	1.30	1.50	V
$t_{rr}$	Reverse Recovery Time $I_F=0.5A, I_R=1A, I_{tr}=0.25A$	50		ns
$T_j, T_{stg}$	Operating Junction and Storage Temperature Range	-55 to +150		$^\circ C$




## Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1  
Typical Forward Characteristics @  $T_J = 25^\circ\text{C}$

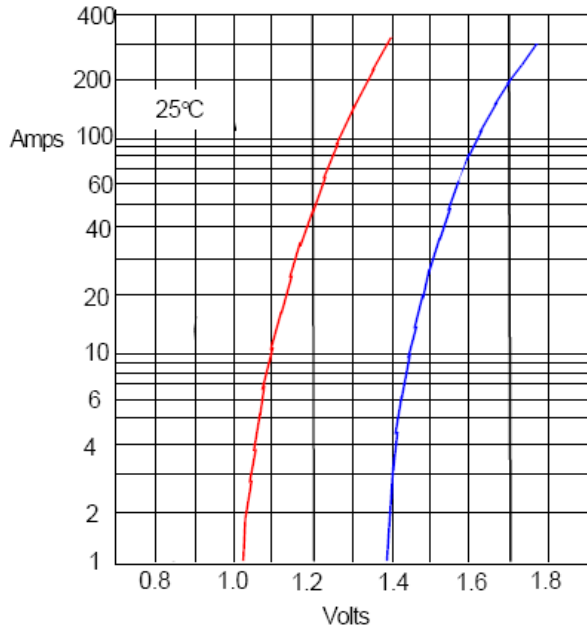

Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Typical Forward Characteristics @  $T_J = 100^\circ\text{C}$

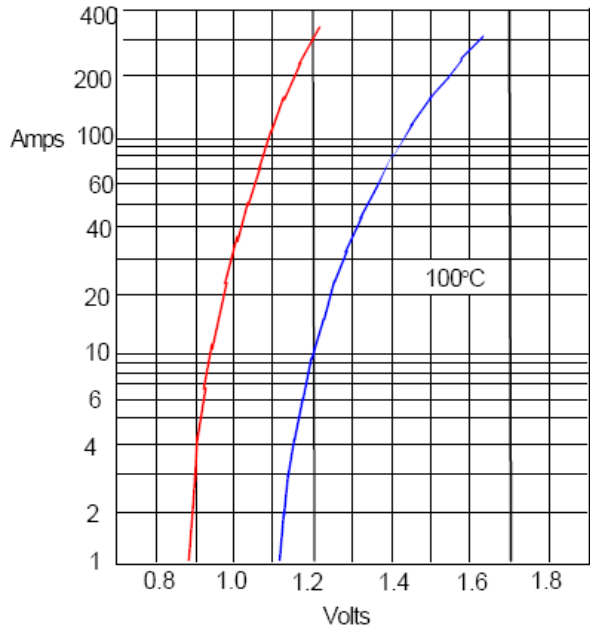

Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

单击下面可查看定价，库存，交付和生命周期等信息

[>>ZG\(中鑫半导体\)](#)