



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
P	ECN NO: S091203	ANGEL	2009.12.03
Q	ECN NO: S100922	ANDY	2010.09.20
R	ECN NO: S120324	Angus	2012.05.31

- SPECIFICATIONS:
- INSERTION FORCE: 3.0KG MAX. WITHDRAWAL FORCE: 1.0KG-3.0KG.
 - INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER.
 - JACK SHALL WITHSTAND 250 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
 - CONTACT RESISTANCE SHALL NOT EXCEED 30mΩ
 - JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AND CONTACT RESISTANCE SHALL NOT EXCEED 50mΩ
 - MEASURING CONDITION:
TEMPERATURE: FROM 5°C TO 35°C.
RELATIVE HUMIDITY: FROM 40% TO 85%.
 - ENVIRONMENTAL SPECIFICATIONS:
7.1 HUMIDITY TEST: HUMIDITY 90% TO 95% TEMPERATURE 40°C ±2°C FOR 96 HOURS.
7.2 HEAT TEST: TEMPERATURE 70°C ± 2°C (HUMIDITY BELOW 50%) FOR 96 HOURS.
7.3 COLD TEST: TEMPERATURE -40°C ± 2°C FOR 96 HOURS.
 - PACKAGING: TAPE & REEL
 - PRINTED DATE CODE "YMMDD" ON TOP OF CONNECTOR.



- RATING: DC 20V 7A 43uF and DC 20V 10A 43uF DEPEND ON MATING PLUG DETAIL TYPE
- SOLDER HEAT RESISTANCE: 260°C 10 SECS.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION MARK ON JACK:
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR WAVE SOLDERING LEAD-FREE PROCESS.

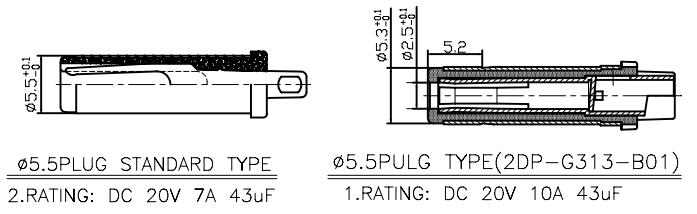

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	GROUND	1	STAINLESS STEEL 0.15t	N/A
E	SHELL	1	SPCC 0.4t	Sn 60u" Min, Ni 60u" Min All Over Cu 60u" Min
D	STOPPER	1	HIGH TEMP.THERMOPLASTIC UL94V-0	BLACK
C	PIN	1	BRASS	Ag 20u" Min.
B	SPRING	1	COPPER ALLOY 0.3t	Sn 60u" Min, Ni 60u" Min.
A	BODY	1	HIGH TEMP.THERMOPLASTIC UL94V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	DC POWER JACK	
X : ±0.5	X : ±2°	DWN Angus	PART NO.2DC-G213B200	
X.X : ±0.3	X.X : ±1°	CHKD Tom	SCALE:4:1	UNIT: mm
X.XX : ±0.2		APVD Tony	SIZE: A3	SHEET: 1 OF 1
REV: R				
CUSTOMER COPY				

单击下面可查看定价，库存，交付和生命周期等信息

[>>信音](#)