



芯科半导体

**ELECTRONIC
PRODUCT**

浙江芯科半导体有限公司




Features

- ✓ Zero forward recovery voltage
- ✓ Zero reverse recovery current
- ✓ Excellent surge current capability
- ✓ Temperature independent switching
- ✓ Positive temperature coefficient on V_F
- ✓ High frequency operation

Applications

- ✓ Motor drives
- ✓ Uninterruptible power supplies
- ✓ Photovoltaic inverter
- ✓ Switch mode power supplies (SMPS)

Part NO.	KXJW120C15T2
V_{RRM}	= 1200 V
$I_F(T_C=150^\circ\text{C})$	= 22 A
Q_C	= 76 nC

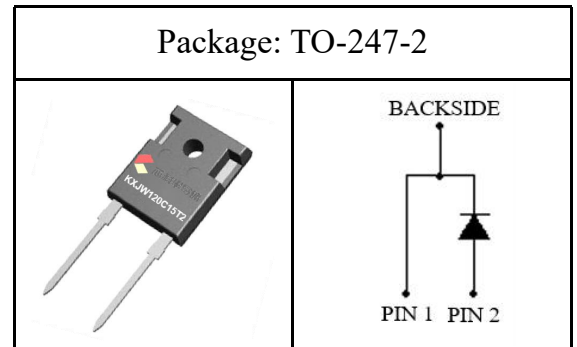

Key performance parameters

Symbol	Parameter	Test conditions	Value	Unit	Note
V_{RRM}	Repetitive peak reverse voltage	$T_C=25^\circ\text{C}$	1200	V	
V_{RSM}	Surge peak reverse voltage (DC)	$T_C=25^\circ\text{C}$	1200	V	
I_F	Continuous forward current	$T_C=25^\circ\text{C}, D=1$ $T_C=135^\circ\text{C}, D=1$ $T_C=155^\circ\text{C}, D=1$	56 29 22	A	Fig.2
I_{FRM}	Repetitive forward surge current	$t_p=10$ ms, Half sine wave $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	82 62	A	
I_{FSM}	Non-repetitive forward surge current	$t_p=10$ ms, Half sine wave $T_C=25^\circ\text{C}$ $T_C=150^\circ\text{C}$	84 52	A	
$\int i^2 dt$	i^2t value	$t_p=10$ ms, $T_C=25^\circ\text{C}$ $T_C=150^\circ\text{C}$	35 13	A^2s	
P_{tot}	Total power dissipation	$T_C=25^\circ\text{C}$	293	W	Fig.1
T_j	Operating junction temperature		-55 ~ 175	$^\circ\text{C}$	
T_{stg}	Storage temperature		-55 ~ 175	$^\circ\text{C}$	



Static electrical characteristics

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
V_{DC}	DC blocking voltage	$I_R = 100 \mu A, T_j = 25^\circ C$	1250	-	-	V	
V_F	Diode forward voltage	$I_F = 15 A, T_j = 25^\circ C$ $I_F = 15 A, T_j = 150^\circ C$	-	1.46 2	1.6 -	V	Fig.3
I_R	Reverse current	$V_R = 1200 V, T_j = 25^\circ C$ $V_R = 1200 V, T_j = 150^\circ C$	-	16 46	-	μA	Fig.4
C	Total capacitance	$V_R = 0.1 V, T_j = 25^\circ C, f = 1 MHz$ $V_R = 400 V, T_j = 25^\circ C, f = 1 MHz$ $V_R = 800 V, T_j = 25^\circ C, f = 1 MHz$	-	1046 71 56	-	pF	Fig.8
Q_C	Total capacitive charge	$V_R = 800 V, T_j = 25^\circ C$	-	76	-	nC	Fig.5
E_C	Capacitance stored energy	$V_R = 800 V, T_j = 25^\circ C$	-	39	-	μJ	Fig.7
T_{RR}	Reverse recovery time	$V_R = 800V, I_F = 25A, di/dt = 1000A/\mu s$	-	11.47	-	ns	
Q_{RR}	Reverse recovery Charge		-	50	-	nC	

Thermal characteristics

Symbol	Parameter	Value		Unit	Note
		Typ	Max		
$R_{\theta JC}$	Thermal resistance from junction to case	0.512	-	$^\circ C/W$	Fig.6
$R_{\theta JA}$	Thermal resistance from junction to ambient	33.64	-	$^\circ C/W$	

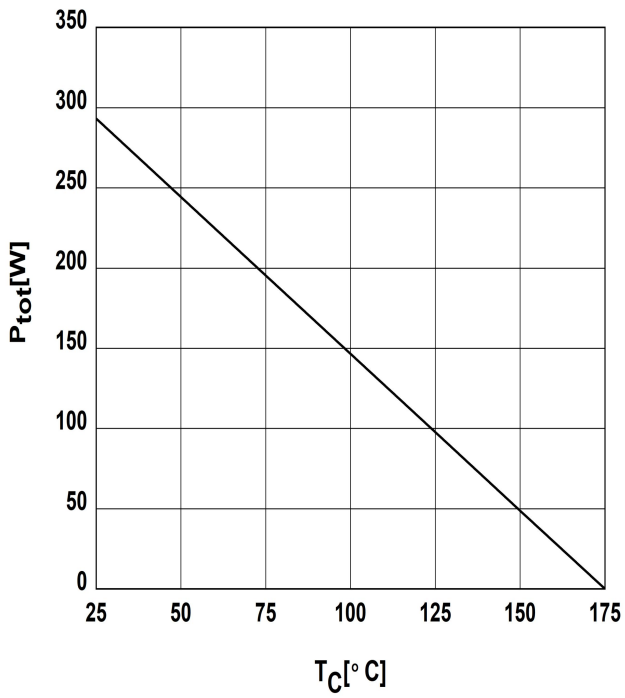


Figure.1 Power dissipation

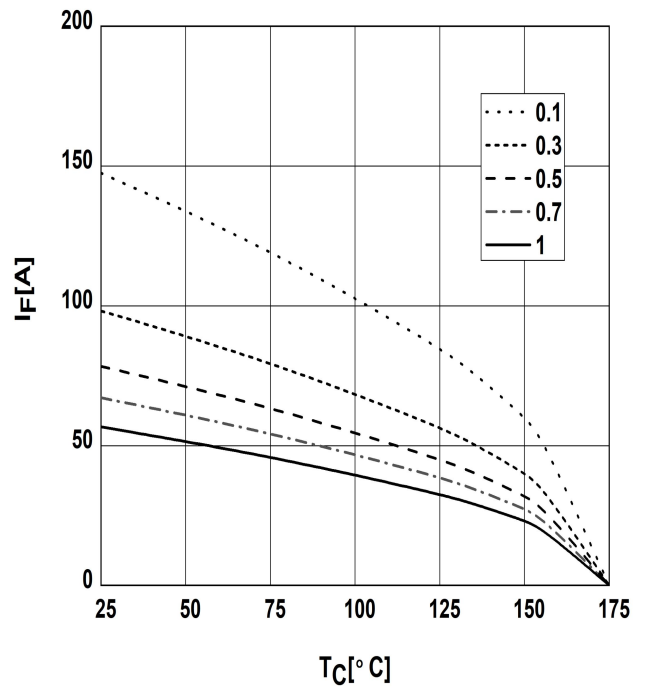


Figure.2 Diode forward current

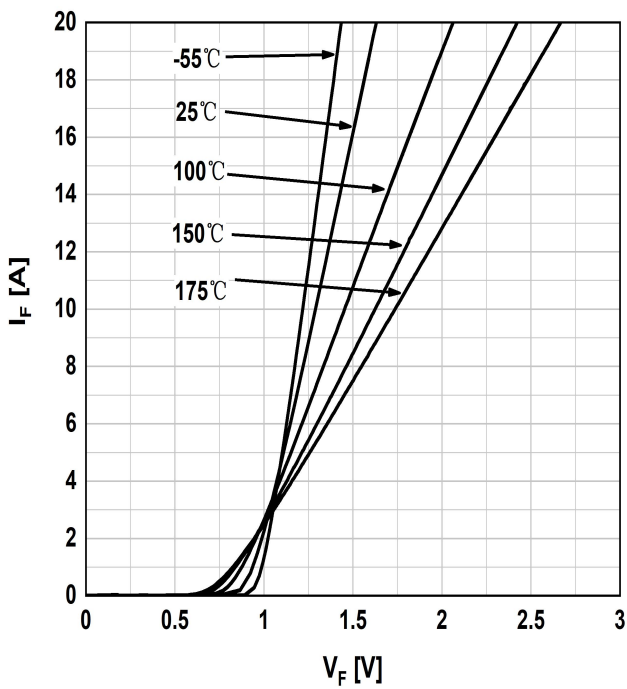


Figure.3 Typical forward characteristics

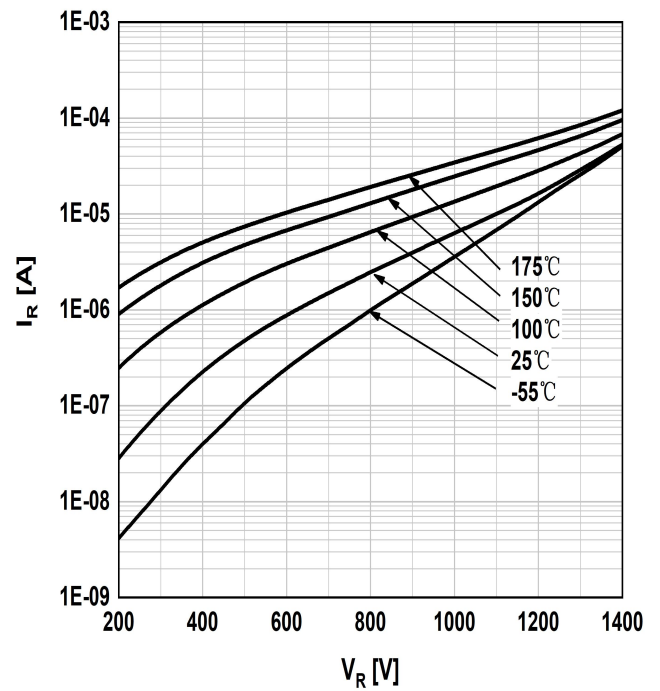


Figure.4 Reverse current vs. reverse voltage

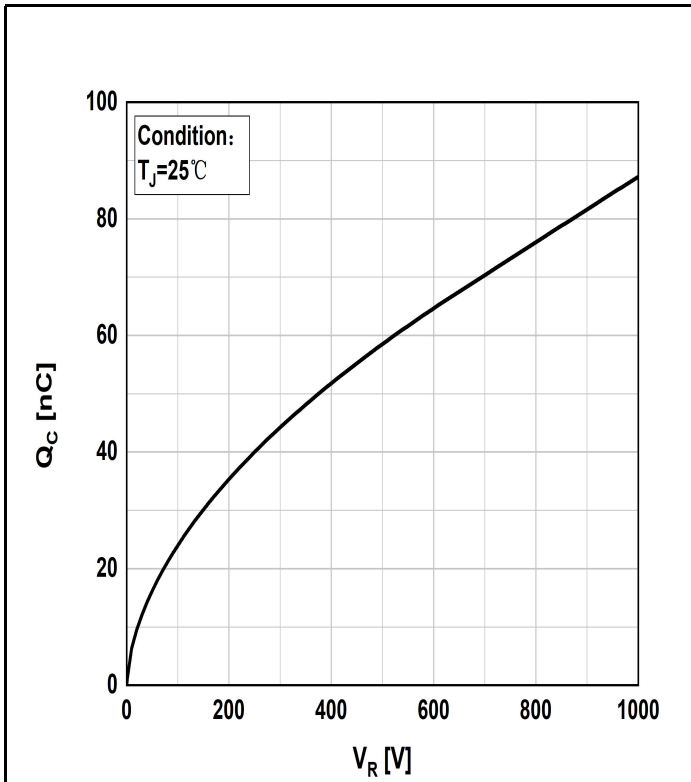


Figure.5 Capacitance charge vs. reverse voltage

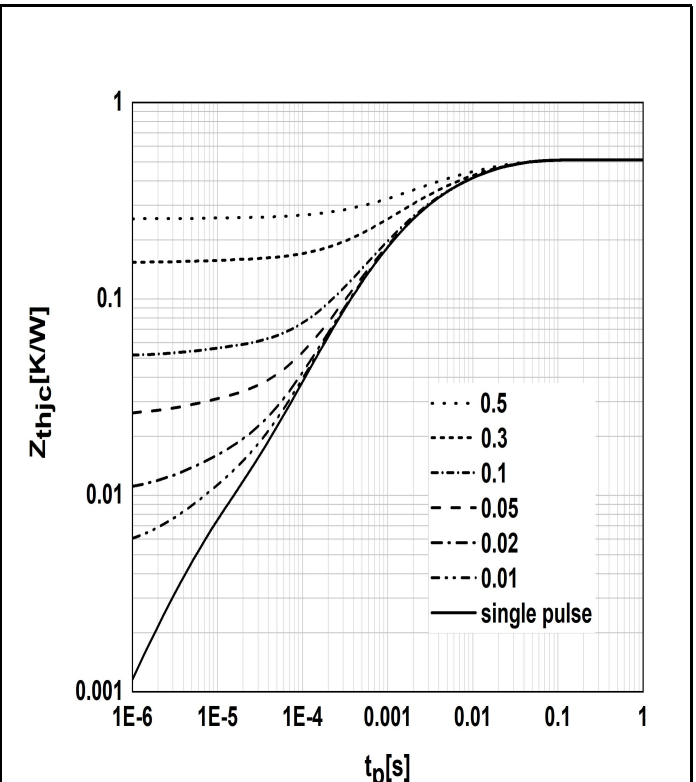


Figure.6 Transient thermal impedance

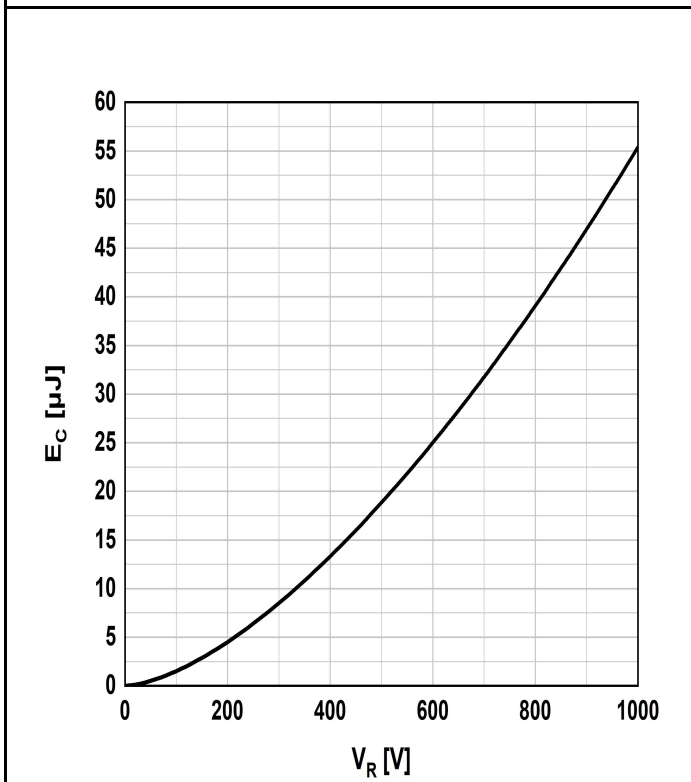


Figure.7 Capacitance stored energy



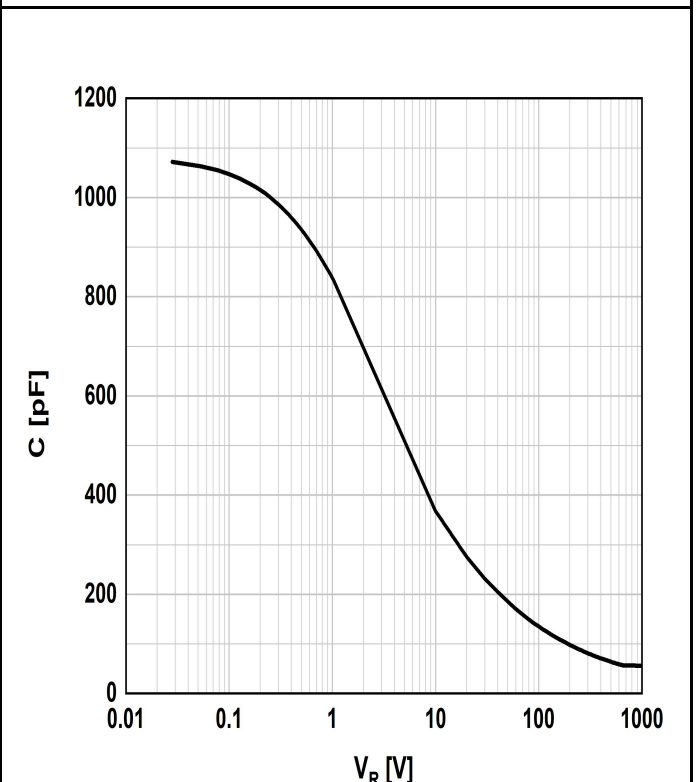


Figure.8 Capacitance vs. reverse voltage



Package outlines

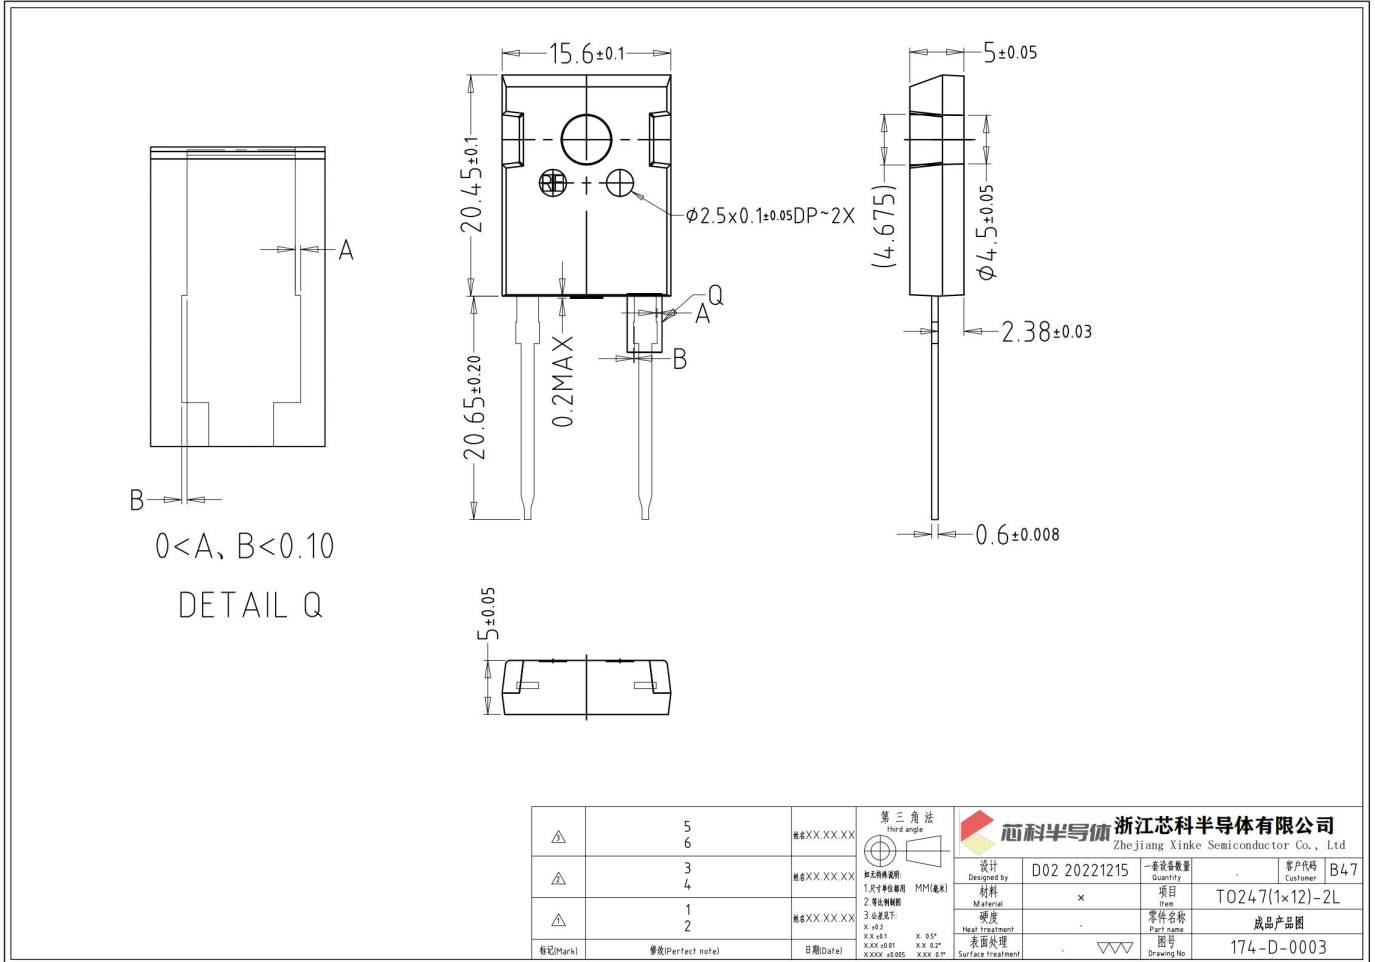

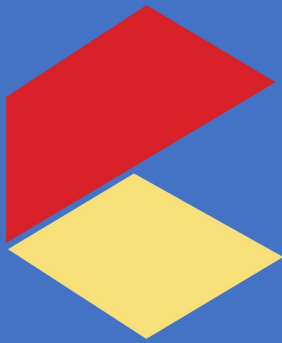

芯科半导体

浙江芯科半导体有限公司
Zhejiang Xinke Semiconductor Co., Ltd

网址：<http://www.xinke-semi.com/>

电话Tel: 0571-56900303

地址：浙江省杭州市富阳区春江街道江南路68号第23幢706室

Address: Room 706, Building 23, No.68 Jiangnan Road, Chunjiang Street, Fuyang District, Hangzhou City, Zhejiang Province, China

单击下面可查看定价，库存，交付和生命周期等信息

[>>浙江芯科](#)