



**芯科半导体**

**ELECTRONIC  
PRODUCT**

**浙江芯科半导体有限公司**




## Features

- ✓ Zero forward recovery voltage
- ✓ Zero reverse recovery current
- ✓ Excellent surge current capability
- ✓ Temperature independent switching
- ✓ Positive temperature coefficient on  $V_F$
- ✓ High frequency operation

## Applications

- ✓ Motor drives
- ✓ Uninterruptible power supplies
- ✓ Photovoltaic inverter
- ✓ Switch mode power supplies (SMPS)

Part NO.	KXJW65C40T2
$V_{RRM}$	= 650 V
$I_F(T_C=150^\circ\text{C})$	= 48 A
$Q_C$	= 145 nC

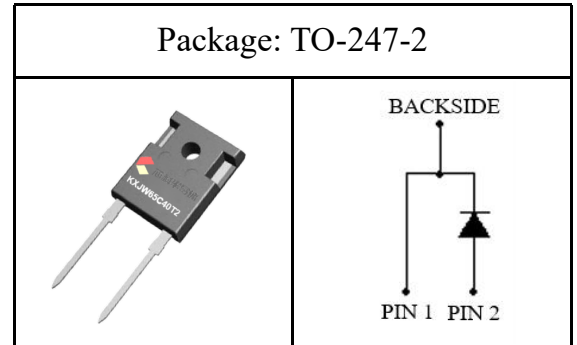

## Key performance parameters

Symbol	Parameter	Test conditions	Value	Unit	Note
$V_{RRM}$	Repetitive peak reverse voltage	$T_C=25^\circ\text{C}$	650	V	
$V_{RSM}$	Surge peak reverse voltage (DC)	$T_C=25^\circ\text{C}$	650	V	
$I_F$	Continuous forward current	$T_C=25^\circ\text{C}, D=1$ $T_C=135^\circ\text{C}, D=1$ $T_C=155^\circ\text{C}, D=1$	119 61 43	A	Fig.2
$I_{FRM}$	Repetitive forward surge current	$t_p=10$ ms, Half sine wave $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	182 164	A	
$I_{FSM}$	Non-repetitive forward surge current	$t_p=10$ ms, Half sine wave $T_C=25^\circ\text{C}$ $T_C=150^\circ\text{C}$	222 216	A	
$\int i^2 dt$	$i^2t$ value	$t_p=10$ ms, $T_C=25^\circ\text{C}$ $T_C=150^\circ\text{C}$	246 233	$\text{A}^2\text{s}$	
$P_{tot}$	Total power dissipation	$T_C=25^\circ\text{C}$	534	W	Fig.1
$T_j$	Operating junction temperature		-55 ~ 175	$^\circ\text{C}$	
$T_{stg}$	Storage temperature		-55 ~ 175	$^\circ\text{C}$	



## Static electrical characteristics

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
$V_{DC}$	DC blocking voltage	$I_R = 50 \mu A, T_j = 25^\circ C$	700	-	-	V	
$V_F$	Diode forward voltage	$I_F = 40 A, T_j = 25^\circ C$ $I_F = 40 A, T_j = 150^\circ C$	-	1.47 2	1.6 -	V	Fig.3
$I_R$	Reverse current	$V_R = 650 V, T_j = 25^\circ C$ $V_R = 650 V, T_j = 150^\circ C$	-	0.03 5	-	$\mu A$	Fig.4
C	Total capacitance	$V_R = 0.1 V, T_j = 25^\circ C, f = 1 MHz$ $V_R = 200 V, T_j = 25^\circ C, f = 1 MHz$ $V_R = 400 V, T_j = 25^\circ C, f = 1 MHz$	-	2659 280 200	-	pF	Fig.8
$Q_C$	Total capacitive charge	$V_R = 400 V, T_j = 25^\circ C$	-	145	-	nC	Fig.5
$E_C$	Capacitance stored energy	$V_R = 400 V, T_j = 25^\circ C$	-	37	-	$\mu J$	Fig.7
$T_{RR}$	Reverse recovery time	$V_R = 400V, I_F = 40A, di/dt = 1000A/\mu s$		20		ns	
$Q_{RR}$	Reverse recovery Charge			122		nC	

## Thermal characteristics

Symbol	Parameter	Value		Unit	Note
		Typ	Max		
$R_{\theta JC}$	Thermal resistance from junction to case	0.281	-	$^\circ C/W$	Fig.6
$R_{\theta JA}$	Thermal resistance from junction to ambient	32.21	-	$^\circ C/W$	

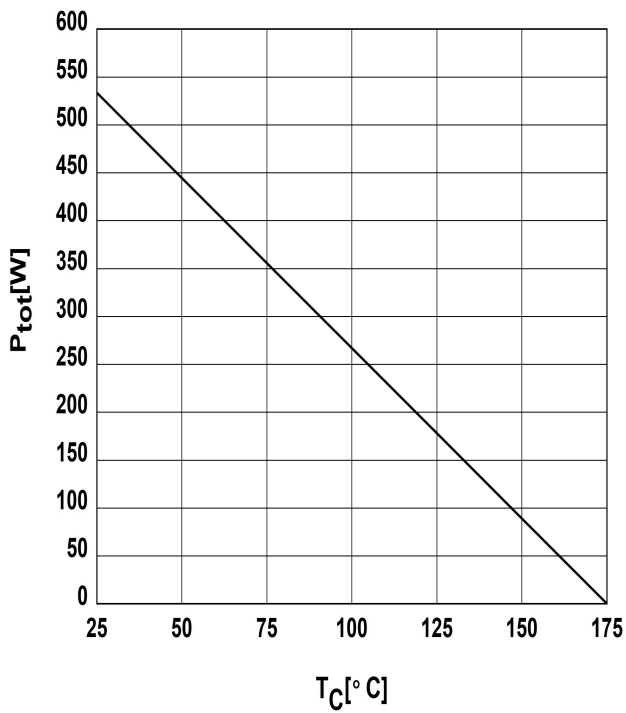


Figure.1 Power dissipation

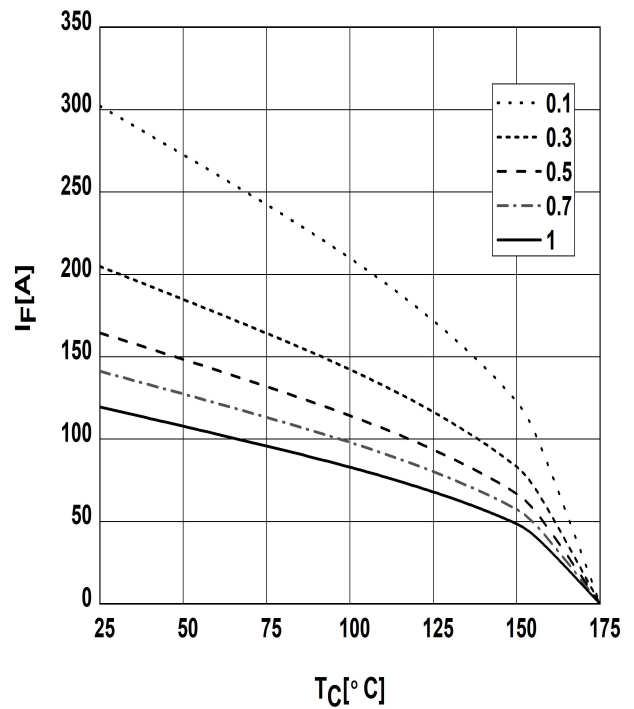


Figure.2 Diode forward current

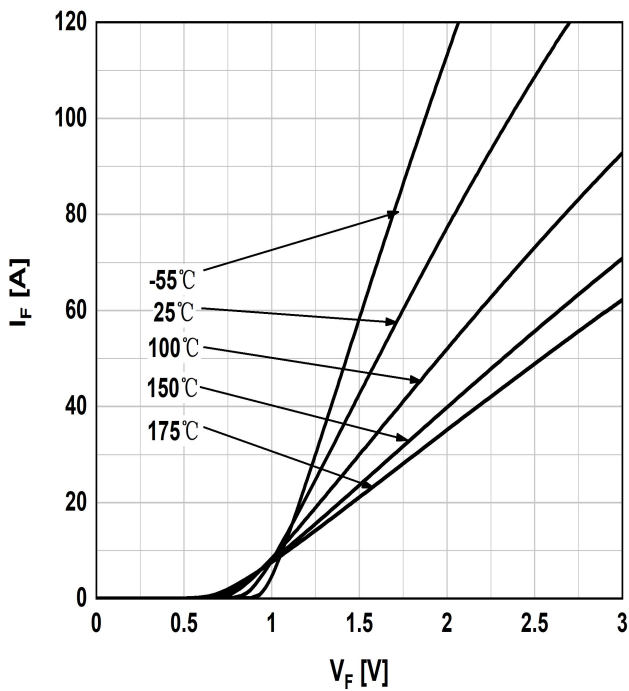


Figure.3 Typical forward characteristics

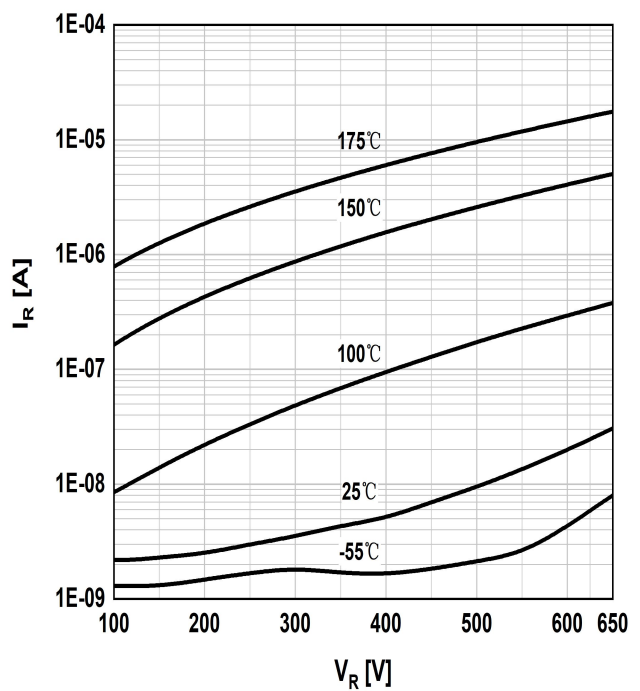


Figure.4 Reverse current vs. reverse voltage

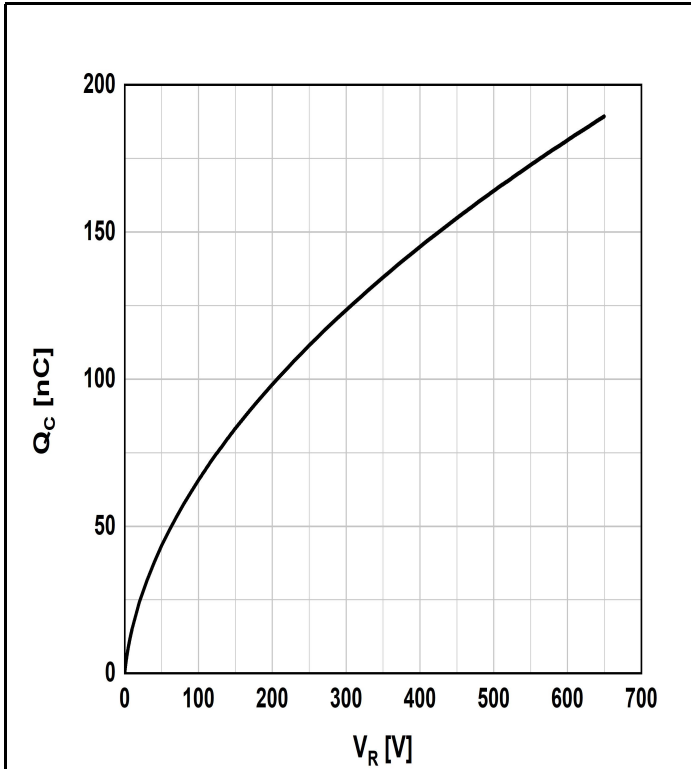


Figure.5 Capacitance charge vs. reverse voltage

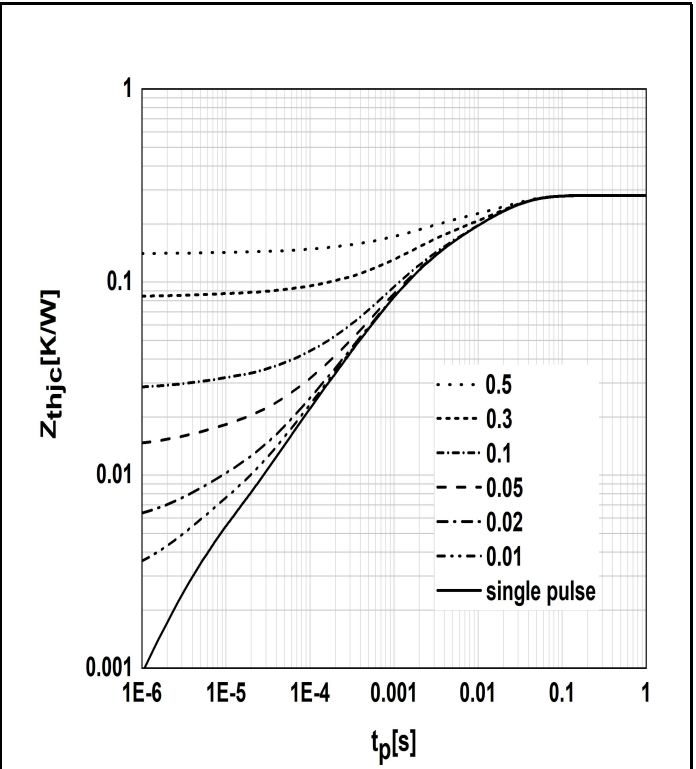


Figure.6 Transient thermal impedance

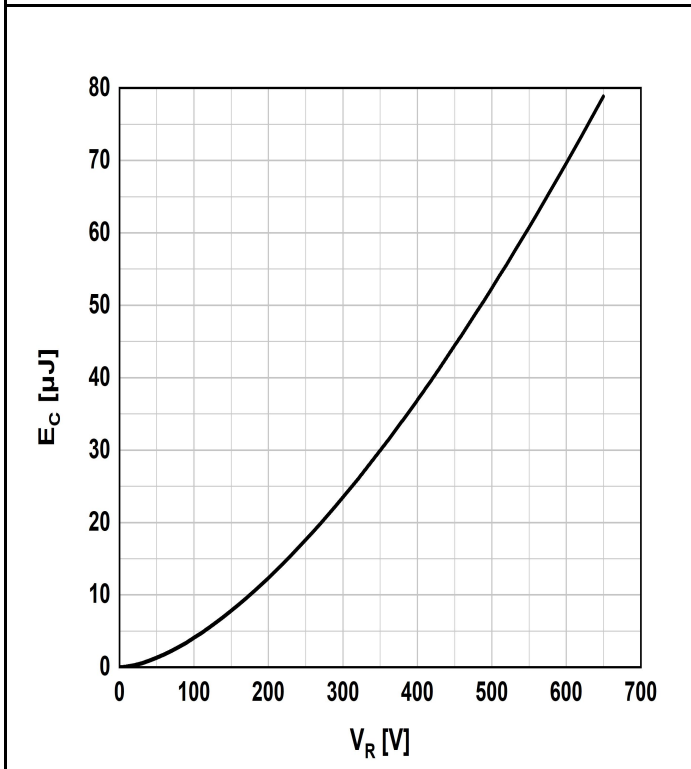


Figure.7 Capacitance stored energy


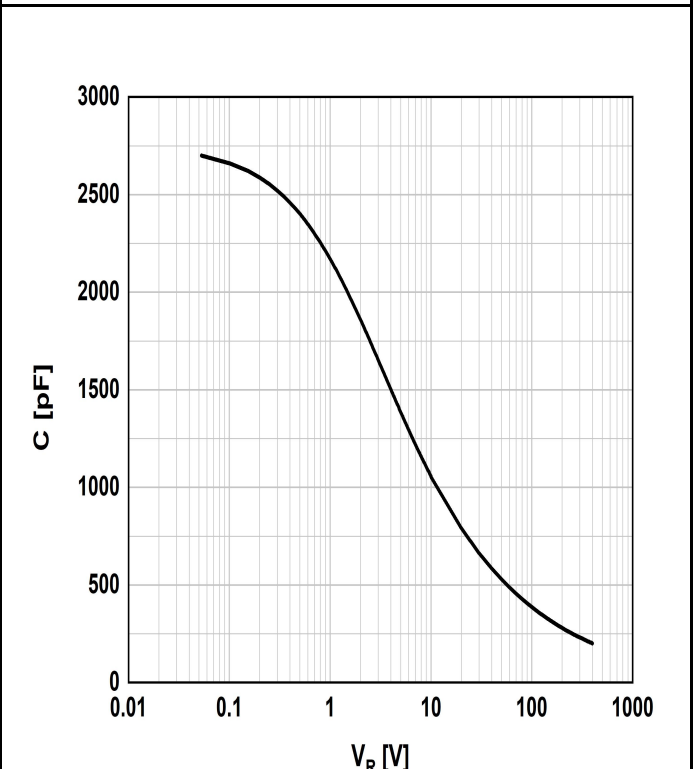


Figure.8 Capacitance vs. reverse voltage



# Package outlines



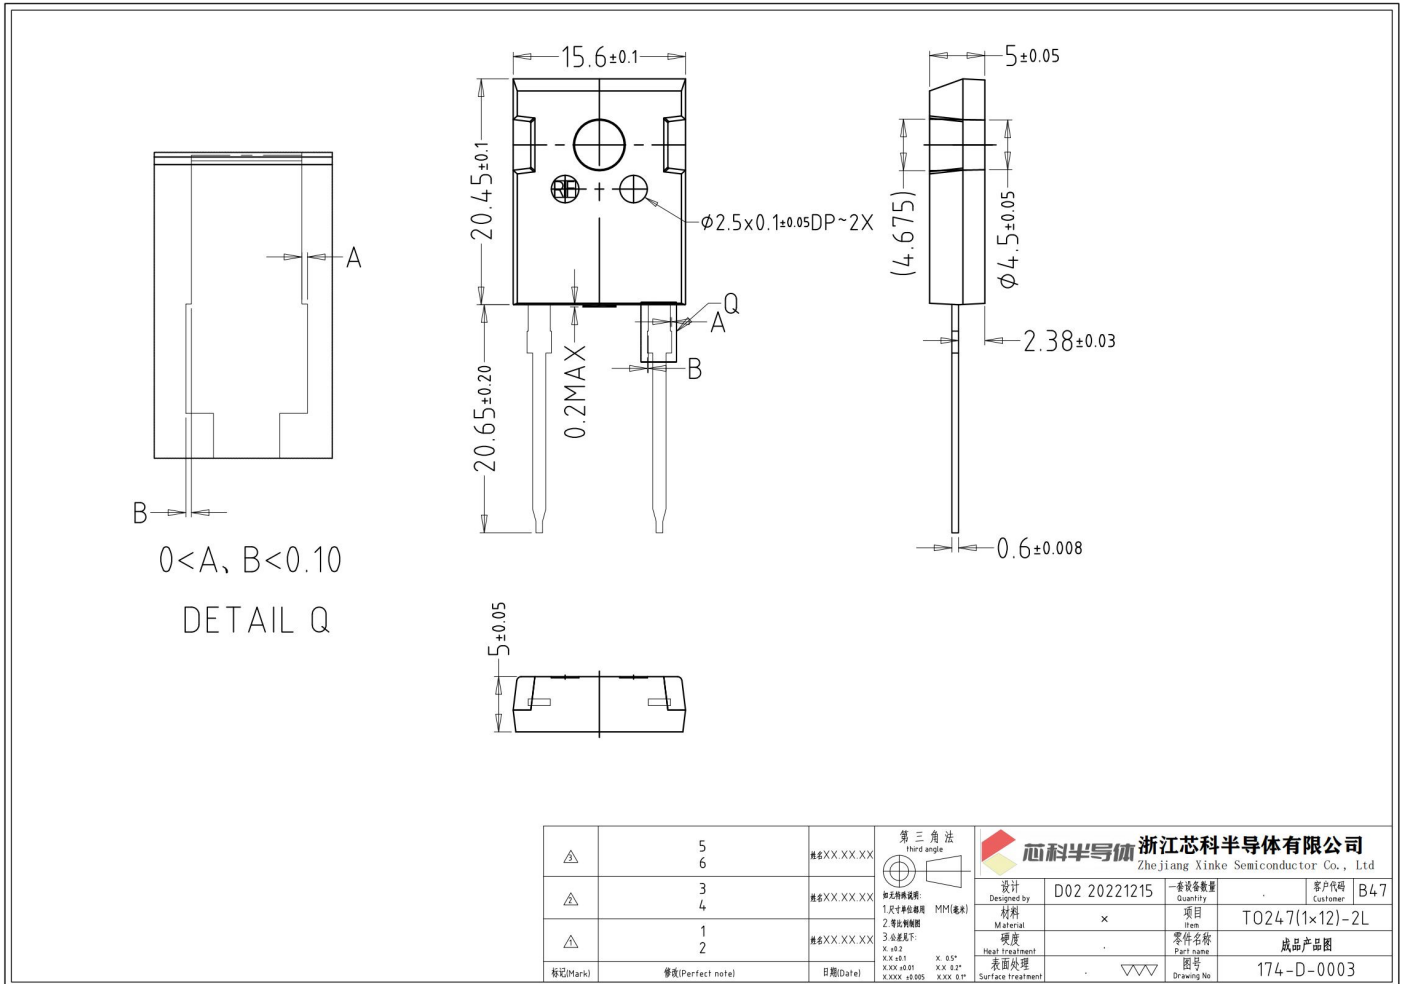

# 芯科半导体

浙江芯科半导体有限公司  
Zhejiang Xinke Semiconductor Co., Ltd

网址：<http://www.xinke-semi.com/>

电话Tel: 0571-56900303

地址：浙江省杭州市富阳区春江街道江南路68号第23幢706室

Address: Room 706, Building 23, No.68 Jiangnan Road, Chunjiang Street, Fuyang District, Hangzhou City, Zhejiang Province, China

单击下面可查看定价，库存，交付和生命周期等信息

[>>浙江芯科](#)